

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-07760
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Warren McKee Unit
8. Well Number 102
9. OGRID Number 192463
10. Pool name or Wildcat Warren McKee

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other Injection <input type="checkbox"/>	7. Lease Name or Unit Agreement Name: Warren McKee Unit
2. Name of Operator OXY USA WTP Limited Partnership	8. Well Number 102
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	9. OGRID Number 192463
4. Well Location Unit Letter <u>L</u> : <u>1650</u> feet from the <u>south</u> line and <u>330</u> feet from the <u>west</u> line Section <u>8</u> Township <u>20S</u> Range <u>38E</u> NMPM County <u>Lea</u>	10. Pool name or Wildcat Warren McKee
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3575'	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type <u>Steel</u> Depth to Groundwater <u>60'</u> Distance from nearest fresh water well <u>&lt;100'</u> Distance from nearest surface water <u>&lt;1000'</u> Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:


REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO  
BEGINNING OF PLUGGING OPERATIONS.**

See Attachment :

**FOR  
CHANGES**



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 8/15/06

Type or print name David Stewart

E-mail address:

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Larry W. Wink TITLE \_\_\_\_\_ DATE \_\_\_\_\_

Conditions of Approval, if any:

OCD FIELD REPRESENTATIVE II/STAFF MANAGER

**AUG 17 2006**

**Warren McKee Unit #102**

TD-9312'      PBD-5583'      Perfs-9175-9290' 6851-7004' (Sqz w/225sx)

10-3/4" 36# csg @ 295' w/ 250sx, 15" hole, TOC-Surf-Circ  
7-5/8" 32# csg @ 3700' w/ 1338sx, 9-7/8" hole, TOC-Surf-Calc  
5-1/2" 20# liner @ 3600-9225' w/ 850sx, 6-3/4" hole, TOC-\*6200'-TS  
4" 11.6# liner @ 9094-9310' w/ 50sx, 4-5/8" hole, TOC-9094'-Circ

CIBP @ 8950' CR @ 5583' Sqz Csg Lk @ 5637-5698' w/ 68sx cmt

1. DO CR @ 5583' & Cmt, RIH & Tag CIBP @ 8950'
2. M&P 25sx cmt @ 8950-8850'
3. M&P 25sx cmt @ 6800-6700' WOC-Tag
4. M&P 25sx cmt @ 5700-5600'
5. Perf @ 4200' sqz 50sx cmt to 4100' - **WOC+ TAG**
6. Perf @ 3750' sqz 100sx cmt to 3550' WOC-Tag
7. M&P 30sx cmt @ 1640-1540'
8. Perf @ 345' sqz 50sx cmt to 245' WOC-Tag
9. 15sx cmt Surface Plug  
    10# MLF between plugs

OXY USA WTP LP - Proposed  
Warren McKee Unit #102  
API No. 30-025-07760

15sx Surface

30sx @ 345-245'

30sx @ 1640-1540'

100sx @ 3750-3550' WOC-Tag


50sx @ 4200-4100'

25sx @ 5700-5600'

25sx @ 6800-6700' WOC-Tag

25sx @ 8950-8850'

5/83-CIBP @ 8950'

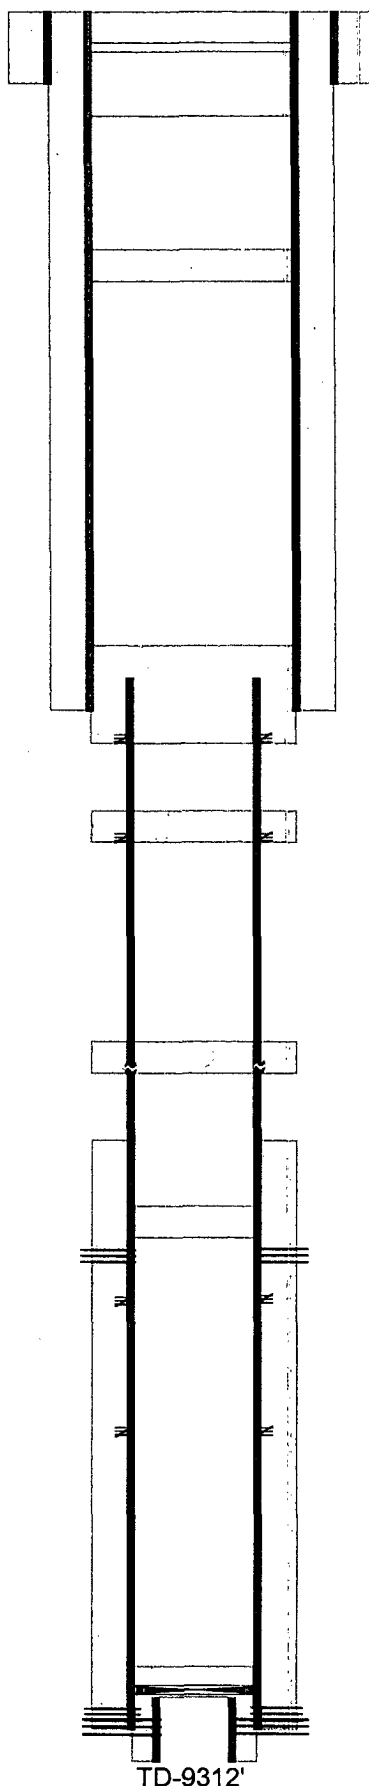

15" hole @ 295'

10-3/4" csg @ 295'

w/250sx-TOC-Surf-Circ

9-7/8" hole @ 3700'

7-5/8" csg @ 3700'

w/1338sx-TOC-Surf-Calc

Perf @ 3750'

Perf @ 4200'

5/83-Csg Lk @ 5637-5698' sqz w/ 68sx

5/62-Perfs @ 6851-7004', 5/67-Sqz w/ 225sx

\*5/62-Perf @ 7000', sqz 100sx-TOC-6200'-TS

\*5/62-Perf @ 7700', sqz 400sx-TOC-7100'-TS

6-3/4" hole @ 9225'

5-1/2" liner @ 3600-9225'

w/350sx-TOC-\*7800'-TS

4-5/8" hole @ 9312'

4" liner @ 9094-9310'

w/50sx-TOC-9094'

Perfs @ 9175-9290'

TD-9312'

OXY USA WTP LP - Current  
Warren McKee Unit #102  
API No. 30-025-07760

