

New Mexico Oil Conservation Division, District I
UNITED STATES 1625 N. French Drive
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
TUCUEN, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

I. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Vintage Drilling LLC

3. Address and Telephone No.

R 310 S. Haldeman Rd, Artesia, NM 88210

4. Location of Well (Footage, Sec., T. R. M. or Survey Description)

1980' FNL 660' FEL
Sec 8, T13S, R31E

5. Lease Designation and Serial No.

NM 16819

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

RNM-116

8. Well Name and No.

Williams Federal #1

9. API Well No.

30-005-20900

10. Field and Pool, or Exploratory Area

SE Chaves Queen Gas Area Assoc

11. County or Parish, State

Chaves, NM

12 CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

APPROVED FOR 4 MONTH PERIOD
ENDING 12/14/06

Pull rods and tubing.



Set cast iron bridge plug at 2500'. Cap with 35' cement.

Perforate 4 1/2" casing at 1850' and squeeze, set 100' plug from 1850' - 1750', TAG.

Perforate 4 1/2" casing at 1035' and squeeze, set 100' plug from 1035' - 935', TAG.

Set 60' surface plug across all annuluses.

Set dry hole marker.

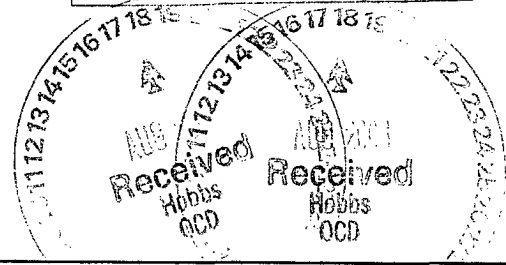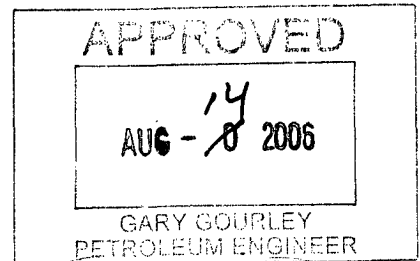

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Secretary

Date 7/14/06

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C Section 1001. makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representation & as to any matter within its jurisdiction

• See Instruction on Reverse Side

GWW

WILLIAMS FEDERAL -1
8-13S-31E

1 1/4" hole

8 5/8 @ 983'
w/ 350 #4 + 100 #4
CIRC

Est TOC @ 1791' (calc)

7 7/8" hole

Leys: Queen
2555-2562'
2570-2574'

4 1/2" 9.5# @ 2660
w/ 300 #4 50/50

FD 2660'

TOPS
T/Rustler 980'
Salt 1050'
B/salt 1793'
Queen 2554'

acs
2/10/06

Current