

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

0-025-01501

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B-2148

7. Lease Name or Unit Agreement Name:

Caprock Maljamar Unit

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other ☐

2. Name of Operator

Forest Oil Corporation

8. Well No.

57

3. Address of Operator

3504 W. County Rd., Hobbs, NM 88240

9. Pool name or Wildcat

Queen Sand

4. Well Location

Unit Letter **H** : **1980** feet from the **North** line and **660** feet from the **East** line

Section **20**

Township **17S**

Range **33E**

NMPM

County **Lea**

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

4187 KB

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE
COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND
ABANDONMENT ☒

CASING TEST AND
CEMENT JOB ☐

OTHER: ☐


12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

9/6/06 Tagged CICB @ 3650. Circulated hole w/ mud laden fluid. CWI. SDFN

9/7/06 Spot 25 sx. cement @ 3650 to 3501. Perf. 7" csg. @ 1500'. RIH w/ 7" CICR. Set @ 1480. Sqz. 60 sx cement. Locked down w/ 2200 psi. Put 20 sx. cement on top of CICR. TOC 1361. Perferate csg. @ 350'. Set packer @ 30'. Establish rate of 3 bbls/min. 200 psi. No circ. Sqz. 100 sx cement. Displace to 200'. WOC SDFN.

9/8/06 Tagged plug @ 165'. Contacted Buddy Hill. Instructed to spot cement from 60' to surface. RIH w/ tbg. to 63'. Spot 10 sx. cement to surface. Clean loc. Install dry hole marker. Rig down.

Approved as to plugging of the Well Bore.
Liability under bond is retained until
surface restoration is completed.

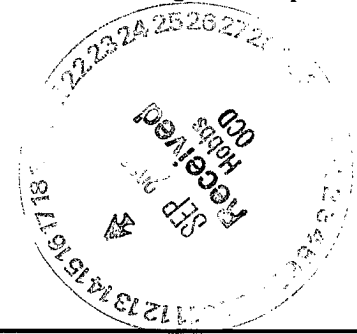

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE RD Phelan TITLE Senior Production Engineer DATE 9/15/06

Type or print name RD Phelan Telephone No. 505 391-9297

(This space for State use)

APPROVED BY Gary W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE SEP 18 2006
Conditions of approval, if any: