

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103  
May 27, 2004

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-21331
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Vintage Petroleum Inc.		6. State Oil & Gas Lease No. K-362
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		7. Lease Name or Unit Agreement Name: Harris State
4. Well Location Unit Letter <u>I</u> : <u>2310</u> feet from the <u>south</u> line and <u>990</u> feet from the <u>east</u> line Section <u>23</u> Township <u>10S</u> Range <u>32E</u> NMPM County <u>Lea</u>		8. Well Number 5
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4280'		9. OGRID Number 24173
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type <u>Steel</u> Depth to Groundwater <u>100</u> Distance from nearest fresh water well <u>N/A</u> Distance from nearest surface water <u>N/A</u> Pit Liner Thickness: <u>N/A</u> mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		10. Pool name or Wildcat Mescalero San Andres

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
<b>NOTICE OF INTENTION TO:</b> PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/> OTHER: <input type="checkbox"/>	<b>SUBSEQUENT REPORT OF:</b> REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input type="checkbox"/> CASING TEST AND CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO THE  
BEGINNING OF PLUGGING OPERATIONS.**

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 9/20/06

Type or print name David Stewart

E-mail address:

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Larry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE SEP 25 2006

Conditions of Approval, if any:

**Harris State #5**

TD-4377' PBTD-4346' Perfs-4248-4286' CIBP-3996'

8-5/8" 24# csg @ 365' w/250sx, 12-1/4" hole, TOC-Surf-Circ  
4-1/2" 9.5# csg @ 4372' w/200sx, 7-7/8" hole, TOC-3580'-TS

1. RIH & tag CIBP @ 3996', M&P 25sx cmt
2. Perf 4-1/2" csg @ 1726' sqz 40sx to 1626' - **WOC-TAG**
3. Perf 4-1/2" csg @ 415' sqz 40sx cmt to 315' WOC-Tag
4. M&P 10sx cmt @ surface  
10# MLF between plugs

Vintage Petroleum Inc.  
Harris State #5  
API No. 30-025-21331


10sx Surface

40sx @ 415-315' WOC-Tag

40sx @ 1726-1626'

25sx @ 3996-3796'

1/00-CIBP @ 3996'

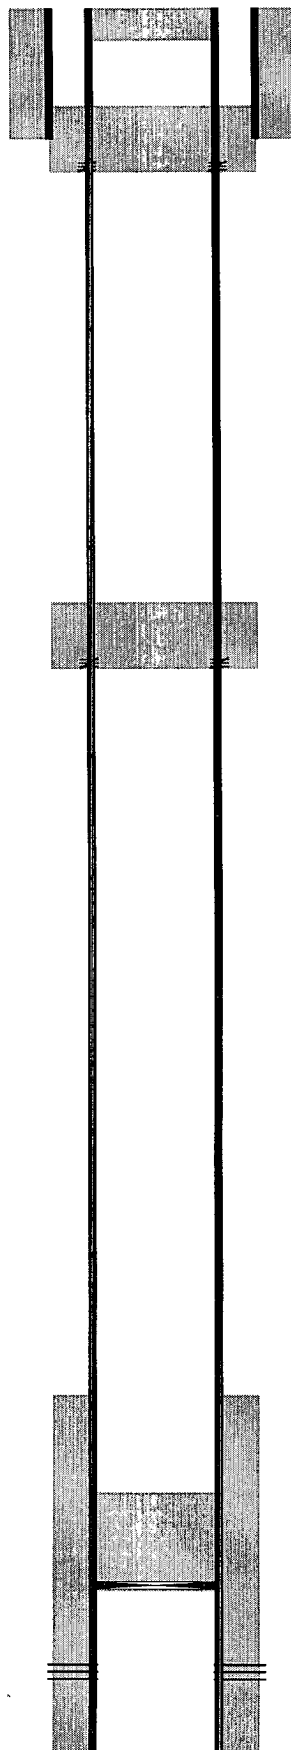

12-1/4" hole @ 365'  
8-5/8" csg @ 365'  
w/250sx-TOC-Surf-Circ

*Perf @ 415'*

*Perf @ 1726'*

7-7/8" hole @ 4377'  
4-1/2" csg @ 4372'  
w/200sx-TOC-3580'-TS

*Perfs @ 4248-4286'*

TD-4377'