District I 1625 N. French Dr., Hobbs, NM 88240 District III
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe


Form C-144 June 1, 2004

Pit or Below-Grade Tank Registration or Closure	
Is pit or below-grade tank covered by a "general plan"? Yes \Boxed No \Boxed	
of action. Registration of a pit or below grade tank \(\Pi\) Clocure of a pit or below grade tank	M

Type of action: Registration of a pit of below-grade tank Closure of a pit of below-grade tank		
Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wrightc@pogoproducing.com		
Address: P. O. Box 10340, Midland, TX 79702		
Facility or well name: Cotton Draw Unit #92 API #: 30-025-37521 U/L or Qtr/Qtr A Sec 16 T 25S R 32E		
County: Lea Latitude 32:08:14.33 Longitude 103:40:23.59 NAD: 1927 🛛 1983 🗌 Surface Owner: Federal 🖾 State 🛱 Private 🗌 Indian 🔲		
Surface Owner: Federat State R Private I Indian I		
<u>Pit</u>	Below-grade tank Volume:bbl Type of fluid:	
Type: Drilling Production Disposal	Volume:bbl Type of fluid:	
Workover ☐ Emergency ☐	Construction material:	
Lined Unlined	Double-walled, with leak detection? Yes If not explain why not	
Liner type: Synthetic ☑ Thickness 12 mil Clay ☐	S OUT Field S	
Pit Volume <u>28000</u> bbl	10 Become	
Depth to ground water (vertical distance from bottom of pit to seasonal	Less than 50 feet (20 points) $\mathbb{Q}^{\mathbb{Q}_{2}}$	
	50 feet or more, but less than 100 feet (10 points)	
high water elevation of ground water.)	100 feet or more X (0 points) & & O	
Wallbard and discount of an all a 200 C and	Yes (20 points)	
Wellhead protection area: (Less than 200 feet from a private domestic	No X (0 points) 0	
water source, or less than 1000 feet from all other water sources.)		
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet (20 points)	
irrigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet (10 points)	
, and a second s	1000 feet or more X (0 points) 0	
	Ranking Score (Total Points)	
1 1711 1811		
If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if		
your are burying in place) onsite 🖂 offsite 🗌 If offsite, name of facility		
remediation start date and end date. (4) Groundwater encountered: No 🛛 Yes 🗌 If yes, show depth below ground surfaceft. and attach sample results.		
(5) Attach soil sample results and a diagram of sample locations and excavations.		
Additional Comments:		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit , or an (attached) alternative OCD-approved plan .		
and been will be constructed of closed according to Milood guidennes , a general permit, or all (attached) afternative OCD-approved plan .		
Date: 10/18/06		
Printed Name/Title Cathy Wright, Sr. Eng Tech Signature Cathy Mush T		
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or		
otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Approval:		
Printed Name/Title CHRIS WILLIAMS DIST. TIPU Signature Mis Williams Date: 10/19/06		

Pit Closing Procedure:

Pits are dewatered. Dirt contractor digs a deep bury pit adjacent to the drilling pit. Deep bury pit is lined with 12 mil plastic. Dirt contractor pushes contents of drilling pit into the deep bury pit. Deep bury pit is capped with 20 mil plastic then covered with 3 feet of fill dirt.

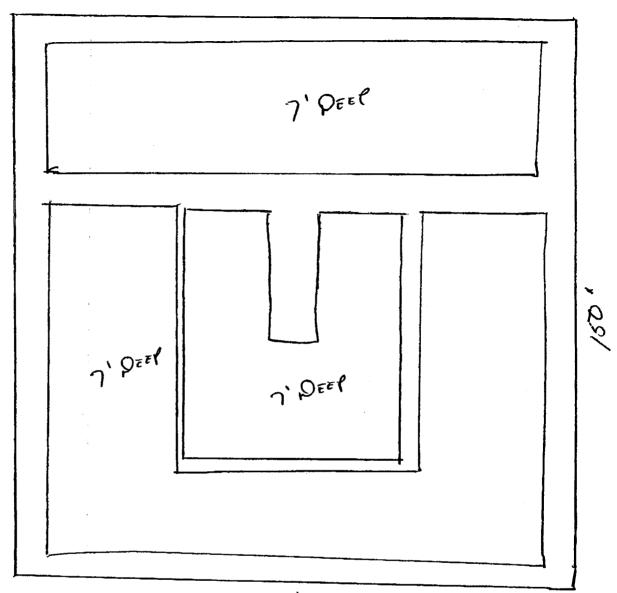

Coffon Pran #92 /50'

100 FNL 700 FEL

SEC16 T255 R3ZE (A)

LEA CO

API \$30-025-37521

32:08:14.33

103:40:23.55