

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

1740
Form C-103
Revised June 10, 2003

WELL API NO. 30-025-35948
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Dirt Devil 8 State
8. Well Number 1
9. OGRID Number 6137
10. Pool name or Wildcat Vacuum; Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Devon Energy Production Company, LP

3. Address of Operator
20 North Broadway Oklahoma City, Oklahoma 73102-8260

4. Well Location
Unit Letter O : 660' feet from the South line and 1980' feet from the East line
Section 8 Township 17S Range 35E Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3985' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:
REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

25 1. MIRU. POOH w/ rod pump & 2-7/8" tubing. Set CIBP in 5.5" casing @ 4770' to abandon the San Andres from 4800' to 4832'. Spot 25 sx (152') cement on top of CIBP. This covers 8-5/8" casing shoe @ 4705'.

2. Circulate well w/ 9 ppg mud.

3. Cut 5-1/2" casing at +/-3690'. POOH w/casing. TOC on 5-1/2" casing annulus at 3790' per CBL run 9/25/03.

4. Spot 25 Sx (127') cement for stub plug at 3740'. Tag TOC. - STUB PLUG 50' BELOW CUT OFF + 50' ABOVE - WOC + TAG

5. Spot 30 Sx (115') cement plug at 580'. This covers 13-3/8" casing shoe @ 530'. Tag TOC.

6. Spot 16 Sx (60') surface cement plug.

7. Cut wellhead off 3' below ground level. Set P&A marker.

8. Restore location.

→ SPOT 25 SX F/1790'-1690' TO S PLUG

Note: Cement class "C" at 14.8 ppg with a yield of 1.32 cu. ft/sx.

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie G. Slack

TITLE: Engineering Technician

DATE 11/6/06

Type or print name Ronnie G. Slack

E-mail address: Ronnie.Slack@dvn.com

Telephone No. 405-552-4615

(This space for State use)

APPROVED BY Harry W. Wink TITLE _____

DATE _____

Conditions of approval, if any:

OC FIELD REPRESENTATIVE II/STAFF MANAGER NOV 14 2006

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: DIRT DEVIL 8 STATE COM 1		Field: VACUUM	
Location: 660' FSL & 1980' FEL; SEC 8-T17S-R35E		County: LEA	State: NM
Elevation: 3985' GR		Spud Date: 7/23/03	Compl Date: 10/17/03
API#: 30-025-35948	Prepared by: Ronnie Slack	Date: 9/18/06	Rev:

PROPOSED P&A

17-1/2" hole
13-3/8", 48#, HCK55, STC, @ 530'
 Cmt'd w/550 Sx

TOC @ 3,790' (CBL 9/25/03)

11" Hole
8-5/8", 32#, MS-80, LTC, @ 4,705'
 Cmt'd w/1535 Sx

SAN ANDRES (9/25/03)

4,800' - 4,802'
 4,817' - 4,822'
 4,828' - 4,832'

9/27/03: acidized w/1400 gals, 15%
 10/9/03: Fraced 4800'-4832 w/23432# 20/40

Perfed sqz holes @ 6200'. Pumped 510 sx
 below retainer @ 6112'. Ran CBL from PBTD
 6092 TO 3600'. Found TOC @ 3790'. (9/25/03)

ATOKA (9/15/03)

11,693' - 11,696'
 11,713' - 11,720'
 11,726' - 11,732'


9/17/03: acidized w/2800 gals

MORROW (9/9/03)

11,982' - 11,990'

9/10/03: acidized w/2000 gals

7-7/8" Hole
5-1/2", 17#, LTC, @ 12,194'
 Cmt'd w/1255 Sx

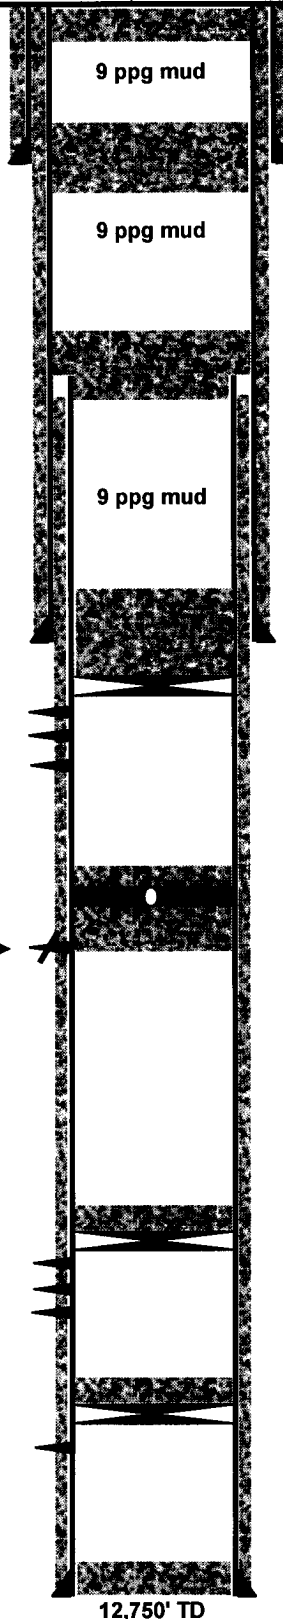

Proposed:

1. Spot 16 Sx (60') surface cement plug
2. Cull wellhead off 3' BGL & set dry hole marker

Proposed:

1. Spot 30 Sx (115') cement plug @ 580'. Tag TOC.

Proposed:

1. Cut 5-1/2" casing @ +/- 3,690 & POOH.
2. Spot 25 Sx (127') stub plug @ 3,740'. Tag TOC.

Proposed:

1. Set CIBP @ 4,770'
2. Spot 15 Sx (152') cement on top of CIBP.

6,092' PBD (Per CBL)
 Cement retainer @ 6,112' (9/24/03)

35' Cement. PBD @ 11,605'
 CIBP @ 11,640' (9/22/03)

35' Cement. PBD @ 11,915'
 CIBP @ 11,950' (9/15/03)

12,112' PBTD

12,750' TD

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: DIRT DEVIL 8 STATE COM 1		Field: VACUUM	
Location: 660' FSL & 1980' FEL; SEC 8-T17S-R35E		County: LEA	State: NM
Elevation: 3985' GR		Spud Date: 7/23/03	Compl Date: 10/17/03
API#: 30-025-35948	Prepared by: Ronnie Slack	Date: 9/18/06	Rev:

CURRENT SCHEMAT

17-1/2" hole
13-3/8", 48#, HCK55, STC, @ 530'
 Cmt'd w/550 Sx

TOC @ 3,790' (CBL 9/25/03)

11" Hole
8-5/8", 32#, MS-80, LTC, @ 4,705'
 Cmt'd w/1535 Sx

SAN ANDRES (9/25/03)

4,800' - 4,802'
 4,817' - 4,822'
 4,828' - 4,832'

9/27/03: acidized w/1400 gals, 15%
 10/9/03: Fraced 4800'-4832 w/23432# 20/40

Perfed sqz holes @ 6200'. Pumped 510 sx
 below retainer @ 6112'. Ran CBL from PBTD
 6092 TO 3600'. Found TOC @ 3790'. (9/25/03)

ATOKA (9/15/03)

11,693' - 11,696'
 11,713' - 11,720'
 11,726' - 11,732'


9/17/03: acidized w/2800 gals

MORROW (9/9/03)

11,982' - 11,990'

9/10/03: acidized w/2000 gals

7-7/8" Hole
5-1/2", 17#, LTC, @ 12,194'
 Cmt'd w/1255 Sx

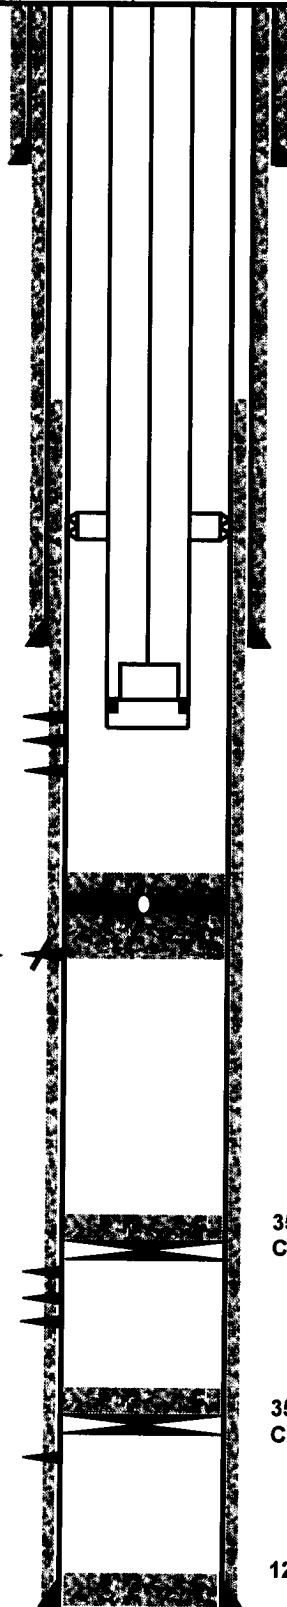

1", 3-4", & 7-8" Rod String

140 Jts 2-7/8" tubing

TAC @ 4,463'
 10 Jts 2-7/8" tubing

SN @ 4,781'

6,092' PBD (Per CBL)
 Cement retainer @ 6,112' (9/24/03)

35' Cement. PBD @ 11,605'
 CIBP @ 11,640' (9/22/03)

35' Cement. PBD @ 11,915'
 CIBP @ 11,950' (9/15/03)

12,112' PBTD

12,750' TD