

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-HOBBS

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other

Injection

2. Name of Operator

OXY USA WTP Limited Partnership

192463

3a. Address

P.O. Box 50250, Midland, TX 79710-0250

3b. Phone No. (include area code)

432-685-5717

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660 FNL 1980 FWL NENW(C) Sec 12 T20S R37E

5. Lease Serial No.

8910086960 - LC031620B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
East Eumont Unit8. Well Name and No.
128

9. API Well No.

30-025-06065

10. Field and Pool, or Exploratory Area
Eumont Yates 7Rvr Qn

11. County or Parish, State

Lea NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- | | | | |
|---|--|--|---|
| <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input type="checkbox"/> Other _____ |
| <input type="checkbox"/> Change Plans | <input checked="" type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon | |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | |

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

TD-3875' PBTD-3620' PERFS-3713-3828' CIBP-3620'

8-5/8" 24# csg @ 303' w/200sx, 12-1/4" hole, TOC-Surf-Circ
5-1/2" 14# csg @ 3874' w/1300sx, 7-7/8" hole, TOC-825'-TS

1. RIH & Tag CIBP @ 3620', M&P 25sx cmt to 3520'
2. M&P 25sx cmt @ 2700-2600'
3. M&P 25sx cmt @ 1500-1400'
4. Perf @ 353', sqz 50sx cmt to 253' WOC-Tag
5. M&P 15sx cmt Surface Plug
- 10# MLF between plugs

**SUBJECT TO LIKE
APPROVAL BY STATE**14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

12/8/06

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Office

DEC 14 2006

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

FREDERICK WRIGHT
PETROLEUM ENGINEER

GWW

OXY USA WTP LP
East Eumont Unit #128
API No. 30-025-06065

15sx Surface


50sx @ 353-253' WOC-Tag

25sx @ 1500-1400'

25sx @ 2700-2600'

25sx @ 3620-3520'

6/97-CIBP @ 3620'

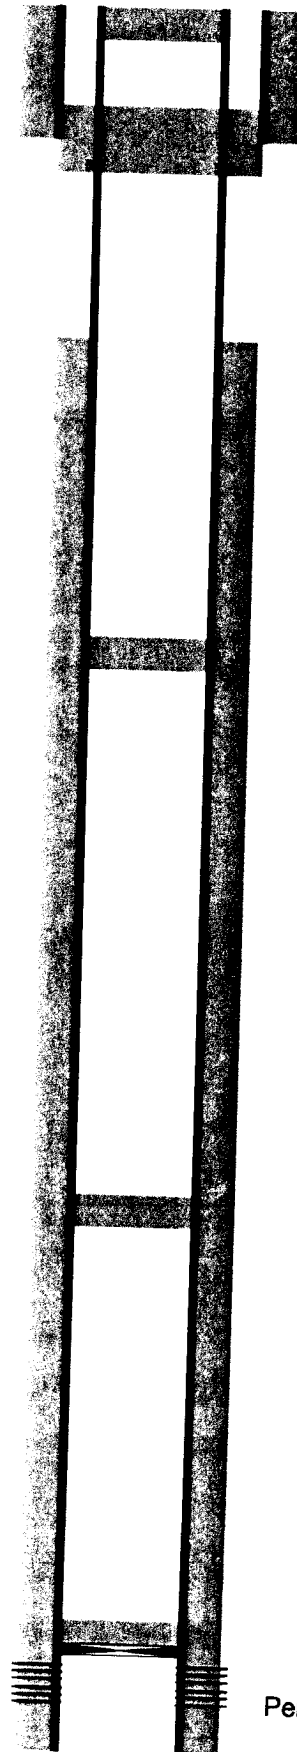

12-1/4" hole @ 303'
8-5/8" csg @ 303'
w/200sx-TOC-Surf-Circ

Perf @ 353'

7-7/8" hole @ 3875'
5-1/2" csg @ 3874'
w/1300sx-TOC-825'-TS

Perfs @ 3713-3828'

TD-3875'

SUNDRY NOTICE SPECIAL STIPULATIONS

1. Approval is granted to plug this well with the following modifications to the proposed procedure:
2. The 5.5 inch to 8.625 inch casing annulus must be cemented to the surface.
3. All plugs below the surface plug should be tagged for casing shoes and the top and base of the salt.

*****All plugs below the surface plug must be at least 100' and 25 sacks of cement.**

**ALL OF THE WORK AUTHORIZED HERE MUST BE COMPLETED WITHIN
90 DAYS.**

**Engineering
can be reached at 505-706-2779 for any variances that might be necessary.**

F Wright 12/14/06