

Submit 3 Copies To Appropriate District Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103  
Revised June 10, 2003

WELL API NO.  
30-025-35948

5. Indicate Type of Lease  
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name  
Dirt Devil 8 State

8. Well Number  
1

9. OGRID Number  
6137

10. Pool name or Wildcat  
Vacuum; Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Devon Energy Production Company, LP

3. Address of Operator

20 North Broadway Oklahoma City, Oklahoma 73102-8260

4. Well Location

Unit Letter O : 660' feet from the South line and 1980' feet from the East line

Section 8

Township 17S

Range 35E

Lea

County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3985' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☒

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**12/28/06 - 1/4/2007:** MIRU. POOH with rod string and 2-7/8" production tubing. Set CIBP at 4770'. Circulated hole with 9# mud. Spot 25 Sx cement on CIBP at 4770'. Calc TOC at 4517'. Covers 8-5/8" casing shoe at 4705'. Cut 5-1/2" casing at 3690'. POOH and lay down casing. Set 25 Sx cement stub plug at 3740'. Tagged TOC at 3590'. Set 25 Sx cement plug from 1690' to 1790'. Set 30 Sx cement plug at 580'. Tagged TOC at 453'. Covers 13-3/8" casing shoe at 530'. Set 16 Sx plug from 60' to surface, RD

**1/11/07:** Cut wellhead off and set dry hole marker. Well plugged and abandoned.

Approved as to plugging of the Well Bore.  
Liability under bond is retained until  
surface restoration is completed.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie G. Slack

TITLE: Engineering Technician

DATE 1/11/07

Type or print name Ronnie G. Slack

E-mail address: Ronnie.Slack@dvn.com

Telephone No. 405-552-4615

(This space for State use)

APPROVED BY May W. Wink  
Conditions of approval, if any:

TITLE

DATE

FEB 02 2007

**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name: DIRT DEVIL 8 STATE COM 1		Field: VACUUM	
Location: 660' FSL & 1980' FEL; SEC 8-T17S-R35E		County: LEA	State: NM
Elevation: 3985' GR		Spud Date: 7/23/03	Compl Date: 10/17/03
API#: 30-025-35948	Prepared by: Ronnnie Slack	Date: 1/11/07	Rev:

**PLUGGED & ABANDONED ON 1/11/07**

17-1/2" hole  
13-3/8", 48#, HCK55, STC, @ 530'  
 Cmt'd w/550 Sx

TOC @ 3,790' (CBL 9/25/03)

11" Hole  
8-5/8", 32#, MS-80, LTC, @ 4,705'  
 Cmt'd w/1535 Sx

**SAN ANDRES** (9/25/03)

4,800' - 4,802'  
 4,817' - 4,822'  
 4,828' - 4,832'

9/27/03: acidized w/1400 gals, 15%  
 10/9/03: Fraced 4800'-4832 w/23432# 20/40

Perfed sqz holes @ 6200'. Pumped 510 sx  
 below retainer @ 6112'. Ran CBL from PBTD  
 6092 TO 3600'. Found TOC @ 3790'. (9/25/03)

**ATOKA** (9/15/03)

11,693' - 11,696'  
 11,713' - 11,720'  
 11,726' - 11,732'


9/17/03: acidized w/2800 gals

**MORROW** (9/9/03)

11,982' - 11,990'

9/10/03: acidized w/2000 gals

7-7/8" Hole  
5-1/2", 17#, LTC, @ 12,194'  
 Cmt'd w/1255 Sx

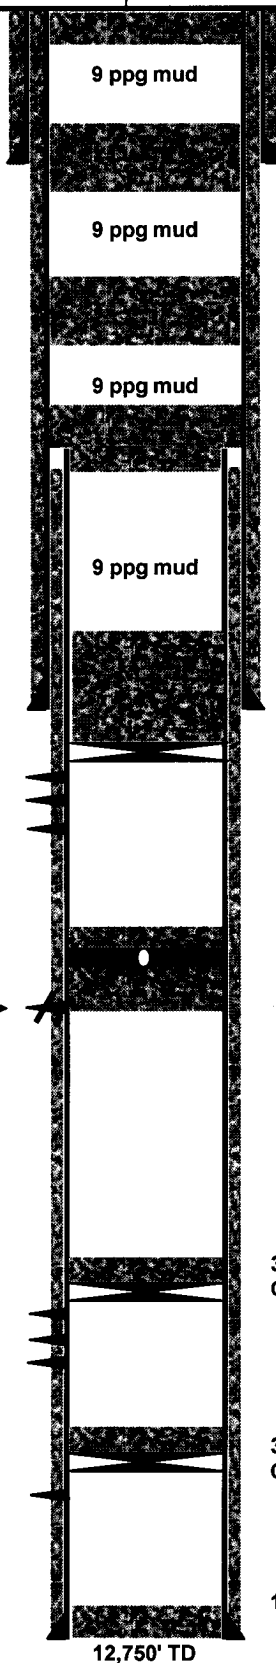

1. Spot 16 Sx (60') surface cement plug
2. Cut wellhead off & set dry hole marker

Spot 30 Sx cement at 580'. Tagged TOC at 453'.

Spot 25 Sx cement from 1690 to 1790 for top of salt plug.

1. Cut 5-1/2" casing @ 3,690 & POOH.
2. Spot 25 Sx stub plug @ 3,740'. Tagged TOC at 3590'

1. Set CIBP @ 4,770'
2. Spot 25 Sx (253') cement on top of CIBP.

6,092' PBD (Per CBL)  
 Cement retainer @ 6,112' (9/24/03)

35' Cement. PBD @ 11,605'  
 CIBP @ 11,640' (9/22/03)

35' Cement. PBD @ 11,915'  
 CIBP @ 11,950' (9/15/03)

12,112' PBTD

12,750' TD