

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-041-10045
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. LC 060978
7. Lease Name or Unit Agreement Name: Milesand Unit
8. Well No. 135
9. OGRID Number
10. Pool name or Wildcat Milnesand (San Andres)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐

2. Name of Operator
Thompson, J. Cleo

3. Address of Operator
P.O. Box 12577 Odessa Tx. 79768-2577

4. Well Location
Unit Letter **O** : **660** feet from the **South** line and **1980** feet from the **East** line
Section **7** Township **8S** Range **35E** NMPM County **Roosevelt**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4246' (DF)

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data


NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPLETION <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Proposed Plug and Abandon Operation

Plug #1: CIBP set @ 4525 set in 1981. Dump 3 sx cement on existing plug.
~~Plug #2: Pump 20 Sx cement plug @ 4125 to 4025. (Tag) Plug NOT REQUIRED~~
Plug #3: Perforate @ 2750'. Set pkr @ 2650 & squeeze 80 sx cement plug from 2650-2750'. (Tag)
Plug #4: Perforate @ 2250'. Set packer @ 2150' & squeeze 80 sx plug from 2150' to 2250'. (Tag)
Plug #5: Perforate @ 455'. Set packer @ 355' & squeeze backside with 150 sx. (Tag)
Plug #6: Pump 10 Sx surface Plug
Install Dry Hole Marker

**THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.**



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Jim Otts TITLE Agent DATE 2/5/07

Type or print name Jim Otts E-mail address: _____ Telephone No. 432-580-7161

For State Use Only

APPROVED BY Gary W. Wink TITLE OCD FIELD REPRESENTATIVE II / STAFF MANAGER DATE FEB 15 2007

Conditions of Approval (if any): _____


Thompson, J. Cleo

Proposed P&A - Milnesand Unit #135

Milnesand (San Andres)

660' FSL & 1980' FEL, Unit Letter O, Sec 7, Township 8S, Range 35E, Roosevelt County, NM

Completed 05/10/1964

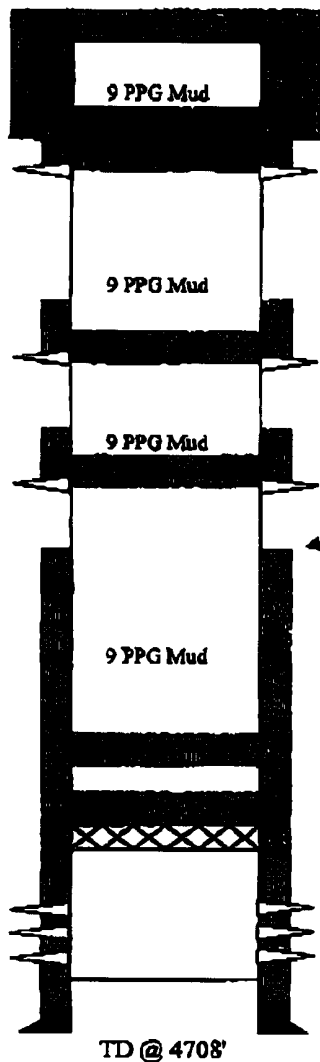

Plug #6: 10 sxs @ surface

Plug #5: Perforate @ 455'. Set pkr @ 355' & squeeze backside w/ 150 sx t

Surface String

8-5/8", 24#, set @ 405'

Cement w/ 200 sxs, TOC @ surface (Circ.)

Plug #4: Perforate @ 2250'. Set pkr @ 2150' & squeeze 80 sx plug from 2

Plug #3: Perforate @ 2750'. Set pkr @ 2650' & squeeze 80 sx plug from 26

TOC @ 3760' (Temp Survey)

Production String

4-1/2", 9.5#, set @ 4708'

Cement w/ 300 sxs neat cmt

TOC: 3760' (Temperature Survey)

Plug #2: Pump 20 sx cmt plug @ 4025' to 4125' (Tag)

Plug #1: CIBP set @ 4525' in 1981. Dump 3 sxs cement on top of existing (

San Andres

Perfs: 4588' - 4671'

PBTD: 4525' (CIBP)

DKD

H:\dkd001\data\excel\wellbore\diagram\Milnesand unit #135_P&A

1/30/2007