

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-025-29951

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
B-2229

7. Lease Name or Unit Agreement Name
Philmer

8. Well Number **22**

9. OGRID Number
217817

10. Pool name or Wildcat
Maljamar / Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
ConocoPhillips Company ATTN: Celeste Dale

3. Address of Operator
3303 N. "A" Street, Bldg. 6 #247, Midland, Texas 79705-5406

4. Well Location
Unit Letter E: 1,980 feet from the North line and 810 feet from the West line
Section 27 Township 17-S Range 33-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4,162' GR

Pit or Below-grade Tank Application ☐ or Closure ☒

Pit type STEEL Depth to Groundwater Distance from nearest fresh water well Distance from nearest surface water N/A

Pit Liner Thickness: STEEL mil Below-Grade Tank: Volume 180 bbls; Construction Material STEEL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE ATTACHED PLUGGED WELLBORE DIAGRAM

05/15/07 Tuesday

Held safety meeting. MIRU Triple N rig #23 and plugging equipment. ND wellhead, NU BOP. RIH w/ 130 jts 2 3/8" workstring and tagged PBTD @ 4,127'. WO wind. RU cementer and circulated hole w/ mud, pumped 25 sx C cmt 4,127 - 3,880'. POOH w/ tubing to 2,952' and pumped 25 sx C cmt 2,952 - 2,705'. POOH w/ tubing to 1,595' and pumped 25 sx C cmt w/ 3% CaCl₂ 1,595 - 1,348'. POOH w/ tubing and WOC. ND BOP. RIH w/ sandline and tagged cmt @ 1,367', POOH w/ sandline. RIH w/ tubing and pumped 45 sx C cmt 412' to surface. POOH w/ tubing. Topped wellbore off w/ cmt. RD, SDFN.

Cut off wellhead & anchors, installed dry hole marker, backfilled cellar.

Approved as to plugging of the Well Bore.
Liability under bond is retained until
surface restoration is completed.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE James F. Newman TITLE James F. Newman, P.E. (Triple N Services) DATE 05/29/07


Type or print name
For State Use Only James F. Newman E-mail address: jim@triplenservices.com Telephone No. 432-687-1994

APPROVED BY: James F. Newman OC FIELD REPRESENTATIVE II/STAFF MANAGER
Conditions of Approval (if any): TITLE DATE

PLUGGED WELLBORE SKETCH
ConocoPhillips Company -- Lower 48 Mid-Continent BU / Odessa

Date: May 29, 2007

RKB @ 4170'
 DF @ 4169'
 GL @ 4161'

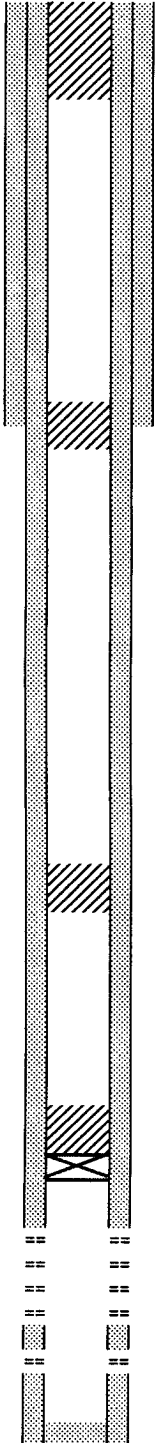

40 sx C cmt 412' to surface, circulated cmt

12-1/4" Hole

8-5/8" 24# K-55 ST&C @ 1,498' w/ 1,000 sx, circ 200 sx
 Top Salt @ ~1,500'
25 sx C cmt 1,595 - 1,367' TAGGED

Base Salt @ ~2,860'

25 sx C cmt 2,952 - 2,705'

circulated plugging mud from PBTD

25 sx C cmt 4,127 - 3,880'

5-1/2" E-Z Drill BP @ 4203'

Grayburg

4248-4252 4290-4294
 4308-4310 4370-4374
 4416-4418 4450-4456
 4484-4487 4492-4496

San Andres

4544-4562 4566-4574

7-7/8" Hole

5-1/2" 17# K-55 LT&C @ 4800'

Cmt'd w/1500 sx Class C - lead cement

PBTD @ 4203' 250 sx - Tail cement, circ 200 sx
 TD @ 4800' TOC @ Surface

Subarea : Buckeye
 Lease & Well No. : Philmed No. 22
 Legal Description : 1980' FNL & 810' FWL, Sec. 27, T-17-S, R-33-E
 County : Lea State : New Mexico
 Field : Maljamar Grayburg/San Andres
 Date Spudded : July 14, 1987 Rig Released: July 24, 1987
 API Number : 30-025-29951
 Status: PLUGGED 05/15/07

State Lease **B-2229**

Stimulation History:

<u>Interval</u>	<u>Date</u>	<u>Type</u>	<u>Gals</u>	<u>Lbs. Sand</u>	<u>Max Press</u>	<u>ISIP</u>	<u>Max Rate</u>	<u>Down</u>
	8/8/87	Perforate 2 jspf 4248'-4574'						
4248-4574	8/11/87	15% NEFE HCl	5,500		3160	1700	4.0	
4248-4574	8/15/87	X-Link Gel	64,000	120,000	4620	3360	27.0	
	7/27/01	Set 5-1/2" E-Z Drill BP @ 4203'						
		Temporarily Abandoned						



PLUGS SET 05/15/07

- 1) circulated plugging mud from PBTD
- 2) 25 sx C cmt 4,127 - 3,880'
- 3) 25 sx C cmt 2,952 - 2,705'
- 4) 25 sx C cmt 1,595 - 1,367' TAGGED
- 5) 40 sx C cmt 412' to surface, circulated cmt

Capacities

5 1/2" 17# csg:	7.663 ft/ft3	0.1305 ft3/ft
8 3/4" openhole:	2.3947 ft/ft3	0.4176 ft3/ft
7" 20# csg:	4.3995 ft/ft3	0.2273 ft3/ft
8 1/2" 24# csg:	2.797 ft/ft3	0.3575 ft3/ft
13 3/4" 61# csg:	1.711 ft/ft3	0.8542 ft3/ft

Formation Tops:

Top Salt
 Base Salt
 Queen 3739'
 Grayburg 4115'
 San Andres 4502'