

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-20278
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. E-9713
7. Lease Name or Unit Agreement Name: NM State
8. Well Number 1
9. OGRID Number 24173
10. Pool name or Wildcat Mescalero San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	2. Name of Operator Vintage Petroleum Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	4. Well Location Unit Letter <u>N</u> : <u>330</u> feet from the <u>south</u> line and <u>1650</u> feet from the <u>west</u> line Section <u>11</u> Township <u>10S</u> Range <u>32E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4287'	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type <u>Steel</u> Depth to Groundwater <u>100'</u> Distance from nearest fresh water well <u>N/A</u> Distance from nearest surface water <u>N/A</u> Pit Liner Thickness: <u>N/A</u> mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:


PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4350' PBTD-4297' PERFS-4118-4128'
8-5/8" 40# csg @ 395' w/225sx, 12-1/4" hole, TOC-Surf-Circ
4-1/2" 9.5# csg @ 4335' w/200sx, 7-7/8" hole, TOC-3370'-Calc
1. RIH & Set CR @ 2300', Sqz 185sx cmt WOC, Contact NMOCD
2. Perf @ 2165', sqz 45sx cmt to 2065'
3. Perf @ 1600', sqz 45sx cmt to 1500'
4. Perf @ 445', sqz 50sx cmt to 345'-WOC-Tag
5. Perf @ 150', sqz 75sx cmt to Surface
10# MLF between plugs



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 6/25/07

Type or print name David Stewart

THE OIL CONSERVATION DIVISION
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Chris Williams TITLE OC DISTRICT SUPERVISOR/GENERAL MANAGER DATE JUN 27 2007

Conditions of Approval, if any:

Vintage Petroleum Inc. - Current
NM State #1
API No. 30-025-20278

12-1/4" hole @ 395'
8-5/8" csg @ 395'
w/225sx-TOC-Surf-Circ

2-3/8" tbg cut @ 2625'

Csg Parted @ 2380'

7-7/8" hole @ 4350'
4-1/2" csg @ 4335'
w/200sx-TOC-3370'-Calc

Perfs @ 4118-4128'

TD-4350'

Vintage Petroleum Inc. - Proposed
NM State #1
API No. 30-025-20278

75sx @ 150-Surface


50sx @ 445-345' WOC-Tag

45sx @ 1600-1500'

45sx @ 2165-2065'

CR @ 2300' Sqz 185sx WOC


2-3/8" tbg cut @ 2625'



Perf @ 150'


Perf @ 445'

12-1/4" hole @ 395'
8-5/8" csg @ 395'
w/225sx-TOC-Surf-Circ




Perf @ 1600'

TOS




Perf @ 2165'

BOS



Csg parted @ 2380'

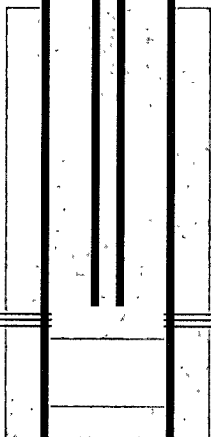

Perfs @ 4118-4128'

7-7/8" hole @ 4350'
4-1/2" csg @ 4335'
w/200sx-TOC-3370'-Calc

TD-4350'