

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
March 4, 2004

WELL API NO. 30-025-31083
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-7845
7. Lease Name or Unit Agreement Name Lovington Paddock Unit
8. Well Number 94
9. OGRID Number 241333
10. Pool name or Wildcat Lovington Paddock

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator Chevron Midcontinent, L.P.	
3. Address of Operator #15 Smith Road, Midland, TX 79705	
4. Well Location Unit Letter <u>P</u> : <u>1130</u> feet from the <u>South</u> line and <u>1190</u> feet from the <u>East</u> line Section <u>36</u> Township <u>16-S</u> Range <u>36-E</u> NMPM <u>Lea</u> County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL L Sect 36 Twp 16S Rng 36E Pit type Steel Depth to Groundwater 60' Distance from nearest fresh water well Over 1000'
Distance from nearest surface water _____ Below-grade Tank Location UL _____ Sect _____ Twp _____ Rng _____ ;
1130 feet from the South line and 1190 feet from the East line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:
REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hrs prior to MI and RU.
2. RIH set CIBP at 6000' and spot 25sx cement plug from 6000'-5800'. (5 1/2 shoe, Paddock)
3. Displace hole w/MLF, 9.5# Brine w/12.5# gel P/BBL
4. Spot 25sx cement plug from 3100'-2900' (B-Salt).
5. Spot 30sx cement plug from 2200'-1950' (T-Salt, 8 5/8 shoe). TAG
6. Spot 25sx cement plug from 150'-surface (Fr. Wtr., surface). WOC TAG.
7. Install dry hole marker.

**THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.**

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent DATE 7-27-2007
Type or print name M. Lee Roark E-mail address: _____ Telephone No. 432-561-8600

(This space for State use)

APPROVED BY Harry W. Wink TITLE _____ DATE AUG 1 2007
Conditions of approval, if any: _____
OC FIELD REPRESENTATIVE II/STAFF MANAGER

Well: Lovington Paddock Unit #94

Field: Lovington

Reservoir: Paddock

Location:

1130' FSL & 1190' FEL
Section 36 (SE/4 SE/4)
Township. 16S
Range 36E Unit. P
County Lea State NM

Elevations:

GL: 3823
KB: 3834
DF

Log Formation Tops

Rustler	1928
Salt	2111
Base Salt	3003
Yates	3052
Seven Rivers	3290
Queen	3704
Grayburg	4390
San Andres	4592
Glorieta	5935
Paddock	6055

TUBING DETAIL - 4/4/02

RKB correction 11.5'
1 jt - 2 7/8" J-55 8-rd tbg sub (8 00')
189 jts - 2 7/8" J-55 8-rd tbg (5899 75')
1 2 7/8" x 5 1/2" TAC (2 90')
10 jts - 2 7/8" J-55 8-rd tbg (301 90')
1 2 7/8" 8-rd SS Blast Joint (30 07')
1 2 7/8" SN (1 10')
1 2 7/8" 8-rd perf tbg sub (4 00')
SN @ 6254 12 TAC @ 5919 25
EOT @ 6259 22

Rod Detail 4/4/02

1 1" Stabilizer 7/8" Pin (3')
1 7/8" 26K SH ST 1 5/8" OD (0 5')
1 1" Stabilizer 7/8" Pin (3')
101 7/8" mix rods (2525')
98 1" fiberglass rods (3675')
1 25-150-RHBC-20-4 pmp


This wellbore diagram is based on the most recent information regarding wellbore configuration and equipment that could be found in the Midland Office wellfiles and computer databases as of the update below. Verify what is in the hole with the wellfile in the Lovington Field Office. Discuss w/WLO Engineer WO Rep OS, ALS, & FS prior to rigging up on well regarding any hazards or unknown issues pertaining to the well.

TAC @ 5919 25

EOT @ 6259 22

Prod. Csg: 5 1/2" 15.5#

Set: 6350 w/1450 sx cmt
Hole Size: 7 7/8" to 6350
Circ: Yes TOC: surface
TOC By: circulation

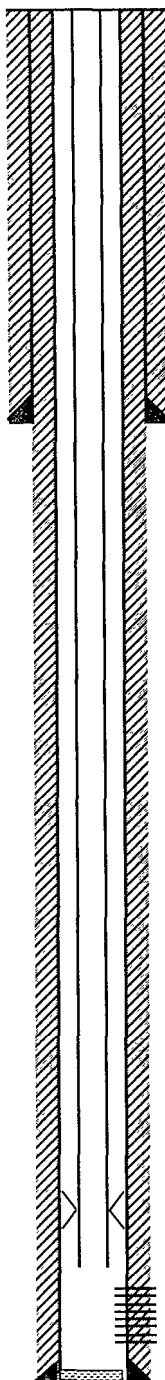Current Wellbore Diagram

TD: 6350 COTD: 6298 PBD: 6298

By WP Johnson

Well ID Info:

Chevron: OM2014
API No. 30-025-31083
L5/L6
Spud Date 3/15/91
TD Reached 3/29/91
Compl Date: 4/20/91

Surface Csg: 8 5/8" 24#

Set: @ 2050 w/ 1100 sx cmt
Hole Size: 12 1/4" TO 2050
Circ: Yes TOC: surface
TOC By: circulation

Initial Completion:


4/91 (Paddock) 6023, 26, 31, 36, 38, 43, 46, 49, 57, 66, 70, 72, 80, 98, 6103, 07, 09, 11, 6113, 16, 28, 31, 34, 38, 42, 45, 93, 97, 6204, 24, 27, 32, 54 (2 JSPF), A/1500 gal 20% NEFE, ReA/8000 gal 20% NEFE

Subsequent Work

Perfs

Status

6023, 26, 31, 36, 38, 43, 46, 49, 57, 66, 70, 72, 80, 98, 61 Paddock - open
6113, 16, 28, 31, 34, 38, 42, 45, 93, 97, 6204, 24, 27, 32, Paddock - open



Updated: 5-29-07 by WAYN

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 16S Range: 36E Sections: 36

NAD27 X: Y: Zone: Search Radius:

County: LE Basin: Number: Suffix:

Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report Avg Depth to Water Report Water Column Report

Clear Form iWATERS Menu Help

AVERAGE DEPTH OF WATER REPORT 07/27/2007

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	(Depth Water in Feet)		
								Min	Max	Avg
L	16S	36E	36				6	40	88	60

Record Count: 6

