

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-23168
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B1557
7. Lease Name or Unit Agreement Name: State C Tr 11
8. Well Number 4
9. OGRID Number 157984
10. Pool name or Wildcat

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	11. Elevation (Show whether DR, RKB, RT, GR, etc.)
2. Name of Operator Occidental Permian Limited Partnership	
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	
4. Well Location Unit Letter <u>G</u> : <u>3300</u> feet from the <u>south</u> line and <u>1980</u> feet from the <u>east</u> line Section <u>2</u> Township <u>21S</u> Range <u>36E</u> NMPM County <u>Lea</u>	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type <u>Steel</u> Depth to Groundwater <u>200'</u> Distance from nearest fresh water well <u>N/A</u> Distance from nearest surface water <u>N/A</u> Pit Liner Thickness: <u>N/A</u> mil Below-Grade Tank: Volume <u>      </u> bbls; Construction Material <u>      </u>	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO THE  
BEGINNING OF PLUGGING OPERATIONS.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 9/17/07

Type or print name David Stewart

E-mail address:

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Gary W. Wink ORIGINAL SIGNED BY GARY W. WINK TITLE FIELD REPRESENTATIVE II/STAFF MANAGER DATE       

Conditions of Approval, if any:

SEP 18 2007

TD-6350' PBTD-5671' PERFS-5753-6113' CIBP-5700'

8-5/8" 24# CSG @ 1278' W/1100sx, 12-1/4" HOLE, TOC-Surf-Circ  
4-1/2" 9.5# CSG @ 6350' W/400sx, 7-7/8" HOLE, TOC-4595'-Calc

1. RIH & Tag Cmt/CIBP @ 5671'
2. M&P 25sx cmt @ 5220-5120'
3. Perf @ 4020' sqz 50sx cmt to 3920' WOC-Tag
4. Perf @ 3400' sqz 50sx cmt to 3300' WOC-Tag
5. Perf @ 2600' sqz 50sx cmt to 2500' WOC-Tag
6. Perf @ 1328' sqz 50sx cmt to 1228' WOC-TAG
7. Perf @ 250' sqz 110sx cmt to Surface

10# MLF between plugs

Occidental Permian LP - Proposed  
State C Tr 11 #4  
API No. 30-025-23168

110sx @ 250-Surface

50sx @ 1328-1228' WOC-Tag


50sx @ 2600-2500' WOC-Tag

50sx @ 3400-3300' WOC-Tag

50sx @ 4020-3920' WOC-Tag

25sx @ 5220-5120'

11/01-CIBP @ 5700' w/3sx cmt to 5671'

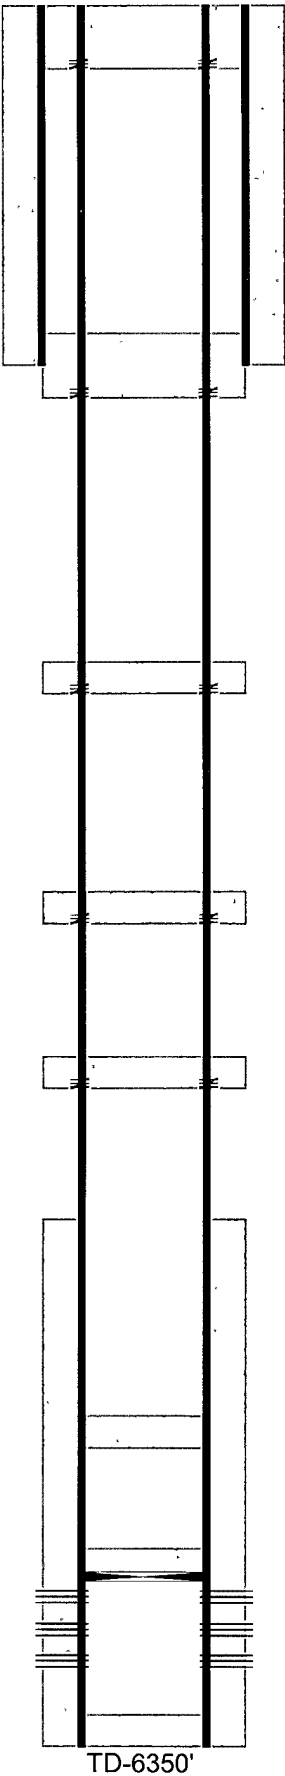

Perf @ 250'

Perf @ 1328'

Perf @ 2600'

Perf @ 3400'

Perf @ 4020'

Perfs @ 5753-6113'

12-1/4" hole @ 1278'  
8-5/8" csg @ 1278'  
w/1100sx-TOC-Surf-Circ

7-7/8" hole @ 6350'  
4-1/2" csg @ 6350'  
w/400sx-TOC-4595'-Calc

TD-6350'