
UNITED STATES UNITED STATES DEPARTMENT OF THE INTERIOR 1025 N. Prench Drive Expires: March 31, 20

ve	Expires: March 31, 20)
ease S	erial No.	

	TUREAU OF LAND MANA NOTICES AND REP		odes, mae em	5 Lease Serial No. NM-046153-A	
Do not use th	NOTICES AND REP is form for proposals to ell. Use Form 3160-3 (A	drill or to re-el	nter an posals.	6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRI	7. If Unit or CA/Agreement, Name and/or No.				
1. Type of Well Gas Well Other			8. Well Name and No Miller Federal # 009 9. API Well No.		
2. Name of Operator John R. Stearns dba Stearns Ogrid # 21566					
		b. Phone No. (include area code) 505-675-2356		30-005-21047 10. Field and Pool, or Exploratory Area	
4. Location of Well (Foolage, Sec., 1980 FSL X 1650 FEL UNIONE Mexico	T., R., M., or Survey Description) nit Letter "J"Section 35, 1	77S, R31E Chaves	County, /	Tom Tom; San Andres 11. County or Parish, State Chaves, New Mexico	
12. CHECK AI	PPROPRIATE BOX(ES) TO	INDICATÉ NATURI	E OF NOTICE, RI	EPORT, OR OTHER DATA	
TYPE OF SUBMISSION		TYP	E OF ACTION		
X Notice of Intent ☐ Subsequent Report ☐ Final Abandonment Notice	Acidize Alter Casing Casing Repair Change Plans Convert to Injection	Deepen Fracture Treat New Construction X Plug and Abandon Plug Back	Production (Statement Production Statement Production Recomplete Temporarily Ab Water Disposal	Well Integrity Other	
If the proposal is to deepen dire Attach the Bond under which the following completion of the intesting has been completed. Find determined that the site is ready Surface: 8 5/8" 24# Comprod: 4 1/2" 9.5# Cast Top Cement calculates Perfs 3993-4112ft Run tbg open ended to Perf at 2000ft, Squeez Perf at 1187ft, Squeez Perf at 350ft, Circulates 9.5 gelled brine between Well fluids will be circulated of the performance of the control of the circulates of the circ	ectionally or recomplete horizontally he work will be performed or provide volved operations. If the operation is mal Abandonment Notices shall be for for final inspection.) asing at 1137ft in 12 1/4" ing at 4197ft in 7 7/8" Holder at 3600ft so 3900ft, Spot 25sx cmt preceded at 35 sx cmt, WOC, The with 35 sx cmt, WOC, The cement to surface, Leave all cement plugs culated to steel pit	y, give subsurface location de the Bond No. on file we results in a multiple complified only after all required. Hole. Cmt with 460 e. Cmt with 225 samples and plug, Ptbg, WOC, Tag cmt plug - Bas Tag cmt plug - Surve 4 1/2"casing an	is and measured and truith BLM/BIA. Require letion or recompletion in ments, including reclamations of sacks. Cement acks Lite w/ additional cements and sacks	GARY GOURLEY PETROLEUM ENGINEER	
14. I hereby certify that the fore Name (Printed/Typed)	egoing is true and correct		agent for Steam		

Billy E. Prichard 575-390-9100		Agent for Stearns					
Signature Bills E. Trubul	Date	4/4/2008					
THIS SPACE FOR FEDERAL OR STATE OFFICE USE							
Approved by		Title	Date				
Conditions of approval, if any, are attached. Approval of this notice does not warrar certify that the applicant holds legal or equitable title to those rights in the subject lea which would entitle the applicant to conduct operations thereon.		Office					
The force of the state of the s		1 ' 1 ' 1 ' 1 ' 1 ' 1 ' 1 ' 1 ' 1 ' 1 '	- d- d- d- of the United				

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

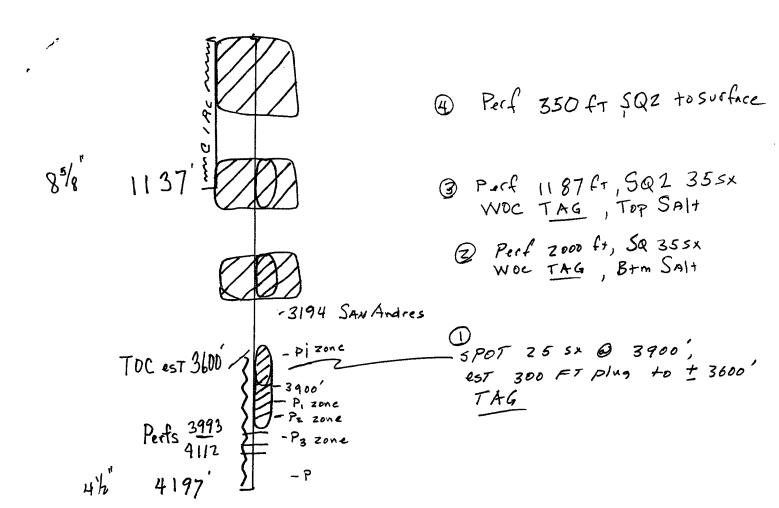

APPROVED

APR - 9 2008

GARY GOURLEY PETROLEUM ENGINEER

John R. Stearns
Miller Federal #7009
30-005-21047
NM-046153-A
1980/S 1650/E
35-J-75-31E
Chaves, Co.