DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 DISTRICT II 1301 W. Grand Avenue, Artesia, NM 88210

1220 S. St. Francis Dr., Santa Fe, NM 67506

DISTRICT IV

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - S Copies


OIL CONSERVATION DIVISION DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

1220 South St. Francis Dr. Santa Fe, New Mexico 87505

☐ AMENDED REPORT

| | | | WELL LO | CATION | AND ACREA | GE DEDICATI | ON PLAT | , | / | |
|--|---------|---------------------------|--|---------|---------------|------------------------------|---------------|----------------|--------------------|--|
| API Number 30-025-38237 | | | | 27400 < | | Pool Name Geronimo; Delaware | | | | |
| BOO 53 | | Property Name MADURO UNIT | | | | | Well Number 7 | | | |
| ogrid no. 162683 | | | Operator Name CIMAREX ENERGY CO. OF COLORADO | | | | | | Elevation 3590' | |
| Surface Location | | | | | | | | | | |
| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County | |
| K | 29 | 19 S | 33 E | | 1860 | SOUTH | 1800 | WEST | LEA | |
| Bottom Hole Location If Different From Surface | | | | | | | | | | |
| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County | |
| Dedicated Acres Joint or Infill Consolidation Code Order No. | | | | | | | | | | |
| 40 | | | | | | | | | | |

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

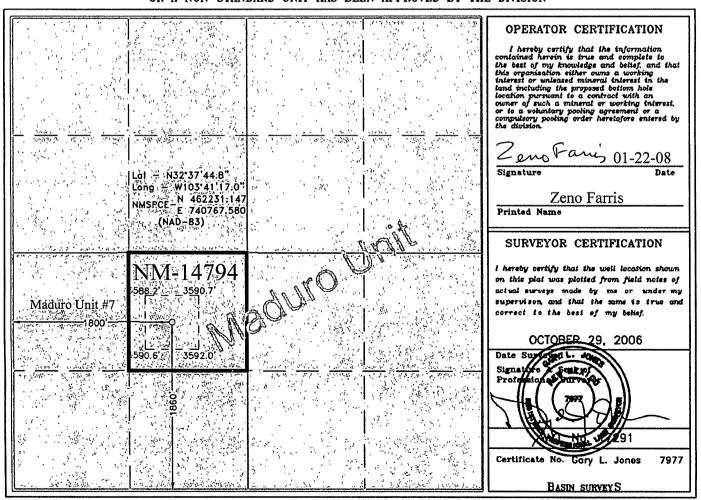

CONDITIONS OF APPROVAL NM-14794; Maduro Unit No. 7 1860' FSL & 1800' FWL, Sec 29, T19S-R33E Lea County, New Mexico

Recompletion/Plugback changes to procedure:

- 1. Set CIBP @ +/- 13,023' (within 100' of upper perfs) Perf Atoka @ 12,516'-12,522'
- 2. Set CIBP @ +/- 12,466' (within 100' of upper perfs)
- 3. Spot 200' cement plug @ \pm 10,972' (10,872'-11,072') T/Wolfcamp, WOC & tag. No more than 3000' is allowed between plugs in cased hole.
- 4. Perf Bone Spring @ 9462'-9496'.
- 5. Set CIBP @ +/- 9412' (within 100' of upper perfs)
- 6. An additional 175' cement plug (100' + 10% per 1000' depth) is to be set at +/- 7500' (7412'-7588'). WOC & tag. No more than 3000' is allowed between plugs in cased hole.
- 7. Contact the Hobbs Field Office (575-393-3612) at least 24 hours prior to commencing any plugging operations.

If you have any questions, contact Les Babyak at 575-234-5947. Requirements are based on BLM Onshore Order #2.