District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 March 12, 2004

For drilling and production facilities, submit to appropriate NMOCD District

Form C-144


For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure Is pit or below-grade tank covered by a "general plan"? Yes \(\subseteq \) No \(\subseteq \)

Type of action. Registration of a pit of o	elow-grade tank 🖂 Closure of a pit of octow-grade	tum Li
Operator: NADEL AND GUSSMAN PERMIAN, LLC Telephone: (432) 682-4429e-mail address:terryw@naguss.com		
Address: 601 N. Marienfeld, Suite 508 Midland, TX 79701 Facility or well name: CEBO STATE # 1 API #: 30-025-3895 U/L or Qtr/Qtr: P_Sec: 10T: 16S R: 33E		
County: LEALatitude: N32*55*51.08"Longitude: W103*38'44.40"_ NAD: 1927		
County: LEA Latitude: N32 33 31.08 Longitude: W103 38 44.40 NAD: 1927 1903 & surface Owner recent state & 1904 & 190		
Pit	Below-grade tank	, , , , , , , , , , , , , , , , , , ,
Type: Drilling \(\sum \) Production \(\sum \) Disposal \(\sum \)	Volume:bbl Type of fluid:	
Workover Emergency	Construction material:	
	Double-walled, with leak detection? Yes If not, explain why not.	
Lined Vinlined	Double-waited, with leak detection. 163 🔄 it not, explain why not.	
Liner type: Synthetic ☑ Thickness _20mil Clay ☐		······································
Volume 20,000_bbl		
Depth to ground water (vertical distance from bottom of pit to seasonal high	Less than 50 feet	(20 points)
water elevation of ground water.) 154	50 feet or more, but less than 100 feet	(10 points) 0
water elevation of ground water.	100 feet or more	(0 points)
	Yes	(20 points)
Wellhead protection area: (Less than 200 feet from a private domestic	No	(0 points) 0
water source, or less than 1000 feet from all other water sources.)		
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	1000 feet or more	(0 points) 0
	Ranking Score (Total Points)	0
If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location:		
onsite of offsite of facility		
and end date. (4) Groundwater encountered: No 🗌 Yes 🗍 If yes, show depth below ground surfaceft. and attach sample results. (5) Attach soil sample		
results and a diagram of sample locations and excavations.		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade		
tank has been/will be constructed or closed according to NMOCD guidelines , a general permit or an (attached) alternative OCD-approved plan.		
Printed Name/l'itleMichelle Sena – Regulatory Analyst SignatureSignature		
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Approval:		
Date: 5/28/08 Printed Name/Title CHRIS WILLIAMS / DIST. SUPSignature Mus Williams		
RECEIVED RECEIVED		

HOBBS OCL

MAY 2 9 2008 HOBBS OCD

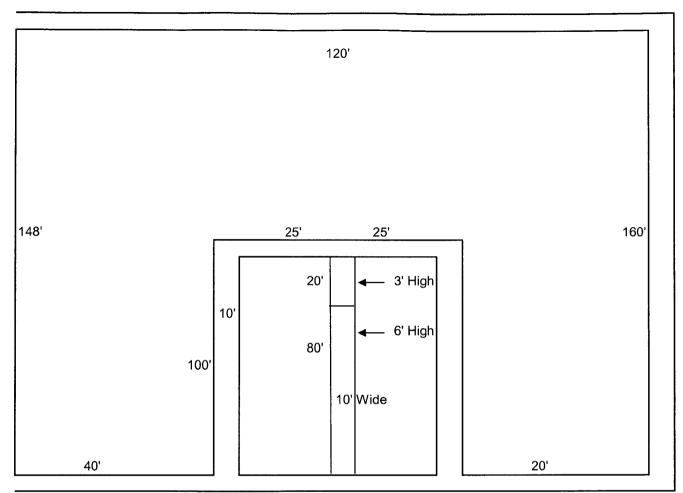

Reserve Pit Size Plat

Not to Scale

