

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

JUN 06 2008

Form C-101
May 27, 2004

Submit to appropriate District Office
AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address XTO Energy Inc. 200 N. Lorraine St., St. 800 Midland, TX 79701		² OGRID Number 5380
³ Property Code 301587	⁴ Property Name North Vacuum ABO Unit	⁵ Well No. 134
⁶ Proposed Pool 1 North Vacuum ABO		⁷ Proposed Pool 2

⁷ Surface Location

UL or lot no. L	Section 12	Township 17S	Range 34E	Lot Idn	Feet from the 1980	North/South line South	Feet from the 760	East/West line West	County Lea
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	---------------

⁸ Proposed Bottom Hole Location If Different From Surface

UL or lot no. P	Section 11	Township 17S	Range 34E	Lot Idn	Feet from the 1170	North/South line South	Feet from the 830	East/West line East	County Lea
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	---------------

Additional Well Information

¹¹ Work Type Code P	¹² Well Type Code O	¹³ Cable/Rotary R	¹⁴ Lease Type Code S	¹⁵ Ground Level Elevation 4024
¹⁶ Multiple	¹⁷ Proposed Depth 10,400	¹⁸ Formation ABO	¹⁹ Contractor C.C. Forbes	²⁰ Spud Date
Depth to Groundwater 84'		Distance from nearest fresh water well >1000		Distance from nearest surface water >1000
Pit: Liner: Synthetic <input checked="" type="checkbox"/> 12 mils thick Clay <input type="checkbox"/> Pit Volume: 20000 bbls Drilling Method: Fresh Water <input checked="" type="checkbox"/> Brine <input type="checkbox"/> Diesel/Oil-based <input type="checkbox"/> Gas/Air <input type="checkbox"/>				

²¹ Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
12-1/4"	8-5/8"	20#/24# J-55	1725	1300	Surf.
7-7/8"	5-1/2"	15.5#/17# J-55	8700	3300	Surf.
	2-3/8"		8018		

²² Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

* Please see attached procedure for adding lateral.

MUD PROGRAM - 8.4 - 8.9 Fresh water from Kickoff point 8428' - 8436' to 10400'.

BOP: Case III; 7-1/16" 3000# w/hydril single pipe ram, blind ram + manifold

Permit Expires 2 Years From Approval
Date Unless Drilling Underway
Horizontal

** HORIZONTAL

²³ I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOC guidelines <input checked="" type="checkbox"/> a general permit <input type="checkbox"/> or an (attached) alternative OCD-approved plan <input type="checkbox"/>		OIL CONSERVATION DIVISION	
Printed name: Sorina L. Flores		Approved by:	
Title: Drilling Tech		Title: PETROLEUM ENGINEER	
E-mail Address: sorina_flores@xtoenergy.com		Approval Date: JUN 11 2008 Expiration Date:	
Date: 6/5/08	Phone: 432-620-6749	Conditions of Approval Attached <input type="checkbox"/>	

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240

DISTRICT II
1301 W. GRAND AVENUE, ARTESIA, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

RECEIVED / MIDLAND

FEB 05 2008

OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-025-23461	Pool Code	Pool Name North Vacuum ABO
Property Code 301587	Property Name NORTH VACUUM ABO UNIT	Well Number 134H
OGRID No. 5380	Operator Name XTO ENERGY	Elevation 4024'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	12	17-S	34-E		1980	SOUTH	760	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	11	17-S	34-E		1170	SOUTH	830	EAST	LEA
Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<div><p>SECTION 11 SECTION 12</p><p>GEODETIC COORDINATES NAD 27 NME SURFACE LOCATION Y=673050.1 N X=749882.1 E LAT.=32.847654° N LONG.=103.519685° W</p><p>BOTTOM HOLE LOCATION Y=672215.4 N X=748300.2 E</p><p>GRID. AZ. = 242°10'55" HORZ. DIST. = 1789.0' S.L. B.H. 830' 1170' 760' 1980'</p></div>	<div><p>OPERATOR CERTIFICATION</p><p>I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p><p><i>Sorina L Flores</i> 6/5/08 Signature Date Sorina L Flores Printed Name</p><p>SURVEYOR CERTIFICATION</p><p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p><p>JANUARY 23, 2008 GARY G. EIDSON NEW MEXICO Date Surveyed Signature & Seal of Professional Surveyor <i>Gary G. Eidson</i> 1/31/08 Certificate No. GARY G. EIDSON 12841 RONALD J. EIDSON 3239</p></div>
--	--

NVAC #134H
Horizontal Sidetrack Procedure
North Vacuum Abo Field
Lea County, New Mexico
AFE #717267
XTO WELL ID #61435

TD: 8700'
PBSD: 8698'
8-5/8" Casing: 5000'
5-1/2" Casing: 5-1/2" 15.5# & 17# J-55
see wellbore diagram for all details



Surface Location: 1980' FSL & 760' FWL, Sec 12, T17S, R34E
Target BHL: 1170' FSL & 830' FEL, Sec 12, T17S, R34E
Drilled Date:
Abo Perfs: 8525-8573' OA
Ground Elev: 40'
Original KB Elev: 40'
Key Energy #36: 40' (12'AGL)

1. MIRU Key Rig #36. Install BOP. Test to 250# & 1000#. Notify NMOGB – permit attached.
2. **Unload and tally ±6800' 2-7/8" 10.40# AOH & 4000' 3-1/2" 13.30# IF workstring.**
3. R/U WSI WL. Run gauge ring and junk basket for 5-1/2" 17# (drift ID – 4.767") to 8560'. Log up and tie into csg collars @ 8541', 8497', 8453', 8410', 8366' (see attached log). P/U Weatherford Oil Tools wireline set 5-1/2" 17# RBP. Set RBP so that the top will be at 8440' RD WL.
4. PU 4-3/4" dummy milling assbly or 4-3/4" flat bottom mill with the 2-7/8" AOH & 3-1/2" IF drill pipe and TIH. Tag up on the RBP @ 8440', set down 20,000# of weight on the RBP. Circulate the hole with fresh water. TOOH with assbly.
5. PU Oil Tools Whipstock System (3° face) with metal muncher mills. **Note: Make sure all mills will gauge to 4.75". Minimum DD is 4.767".** Total length of the whipstock assembly in the set position is approximately 12'. Orient the UBHO sub and whipstock face on the surface. Insert the gyro stinger (Scientific Drilling) to ensure compatibility and to check orientation.
6. TIH with the whipstock assembly slowly, being careful when picking the string up off of the slips and when setting the slips. Fill DP every 2000'. Tag the RBP at 8440' with 2000# of weight. PU to first tool joint and RU Scientific Drilling gyro truck. Orient the whipstock to the desired azimuth and work the torque out of the drill string.
7. When desired orientation is achieved, tag the RBP with 2000# of weight, take a final check shot with gyro, then apply weight and set the anchor with 20,000# compression to shear the running bolt. RD WL truck.
8. Obtain values for free torque, PU & SO weights. Install ditch magnets at the surface. Lower milling assembly and make the starting cut through the casing wall at approximately 8428'.

9. Mill the remainder of the window, 8428-36', making the necessary rat hole (8440') to ensure that the string mill has fully opened the window, and that the window exit is smooth. Work the mills through the window. When the window is "clean", circulate the hole clean, TOO H and LD the window mills.
10. PU 4-3/4" bit ("47-type" – the Abo has 'chert' in it), PU 3-1/2" dir assbly w Non-Mag DC & GammaRay, run surface tests, and TIH. ***Mud loggers should be rigged up after cutting the window and prior to commencing the curve.*** Use Gyro for first few surveys. Follow well plan from Baker. Open hole lateral length is +/- 1800'. Be prepared to drill with an XCD/Xanthum fluid system to keep 'YP' higher for hole cleaning in the 8-5/8" area. **For trips out of the hole, circ hole clean with sweep(s). TOH slowly in the curve and lateral, if necessary consider pumping out.**
11. At TD, circulate the hole clean with polymer sweeps.
12. TOO H and LD directional tools.
13. TIH with 4-3/4" (4-1/2") swaging tool, single reamer about 7-8 jts behind swaging tool, wash and ream to TD. POH and place 2nd reamer 1 jt behind 1st, wash and ream to TD, pull back up through the window, RIH for push pull test to btm, circ hole clean.
14. TOO H & LDDP. RD Re-entry Rig. Prepare to move to the next location.

Chip
4/29/08

MINIMUM BLOWOUT PREVENTER REQUIREMENTS

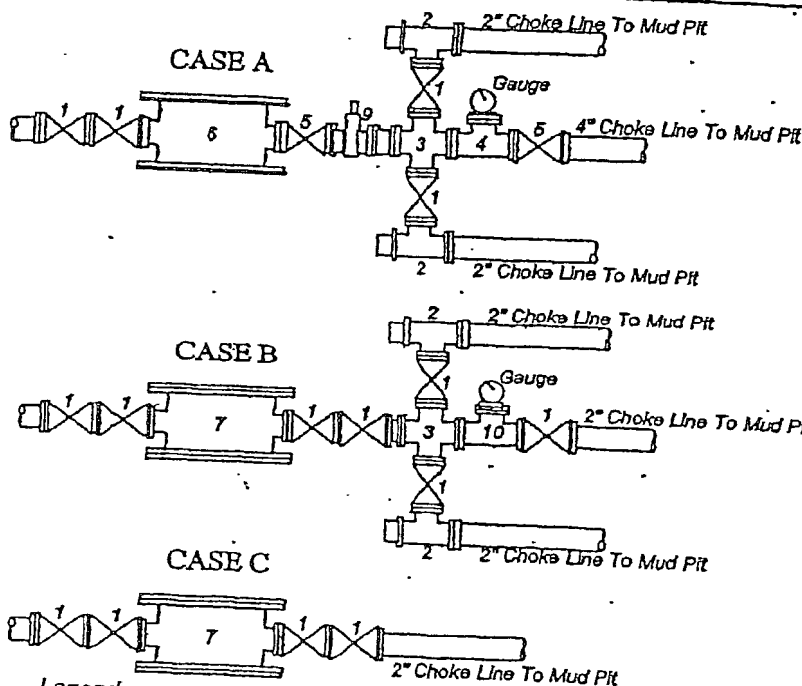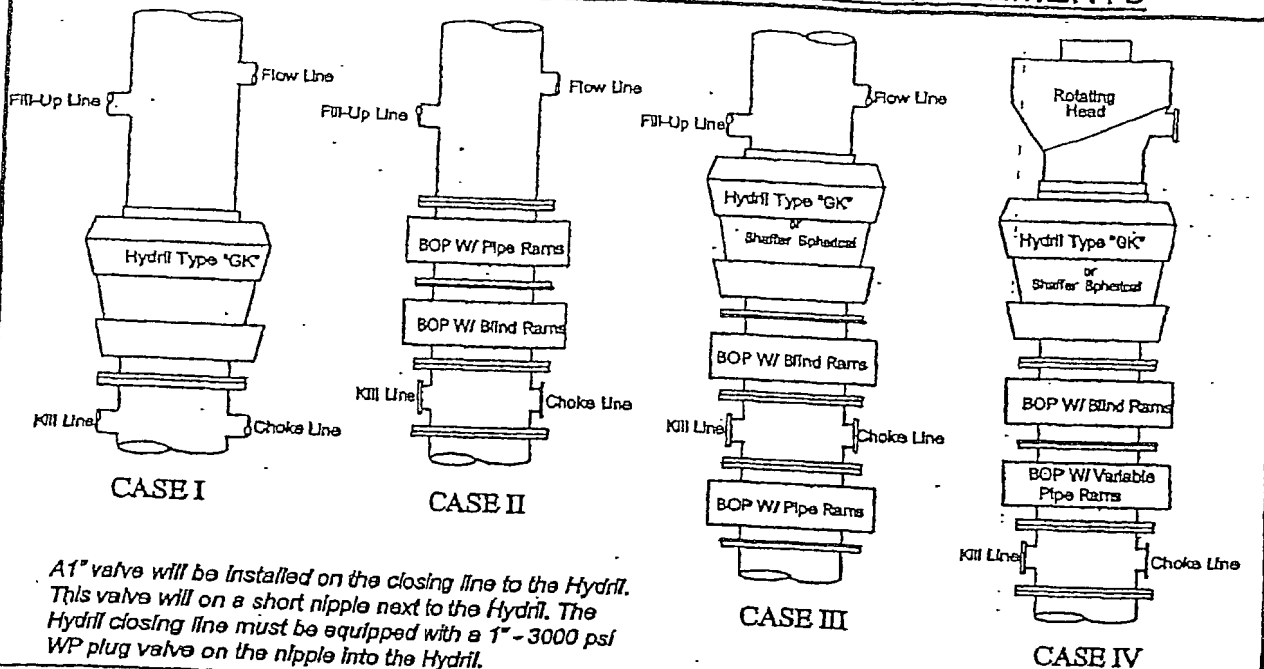

BOP SIZE	BOP CASE	WORKING PRESSURE	CHOKE CASE
13-5/8"	IV	5000	A

**Rotating head required*

Bradenhead furnished by Conoco will be:
Mfr: Wood Group
Description: 13-3/8" x 13-5/8" 3M
Type: SOW

Legend

- 2" flanged all steel valve must be either Cameron "F", Halliburton Low Torque or Shaffer Flo-Seal.
- 2" flanged adjustable chokes, min. 1" full opening & equipped with hard trim.
- 4" x 2" flanged steel cross.
- 4" flanged steel tee.
- 4" flanged all steel valve (Type as in no. 1).
- Drilling Spool with 2" x 4" flanged outlet.
- Drilling Spool with 2" x 2" flanged outlet.
- 2" x 2" flanged steel cross.
- 4" pressure operated gate valve.
- 2" flanged steel tee.

Notes

Choke manifold may be located in any convenient position. Use all steel fittings throughout. Make 90° turns with bull plugged tees only. No field welding will be permitted on any of the components of the choke manifold and related equipment upstream of the chokes. The choke spool and all lines and fittings must be at least equivalent to the test pressure of the preventers required. Independent closing control unit with clearly marked controls to be located on derrick floor near driller's position.

XTO ENERGY

Well: North Vacuum Abo Unit #134
Formerly Bridges State #134
Area: Buckeye
Location: Section 12, T17S, R34E
County: Lea
Elevation: 4046' GR

WI: 84.4115%
NRI: 73.86%
Spud:
State: New Mexico



12 1/4" Hole

8 5/8" 24# & 20# J-55 set @
1725' Cmt w/1300 sx CL A
Cmt circ

North Vacuum Abo Unit 134

Spud 3/21/70

Complete Well 4/24/70

Abo: Initial Completion

4/70: Perforate 8525-8573, 22 holes Acidize w/5000 gals 15% Dine
Acid + 20 RCNBS

IP: 240 BO, 5 BW & 220 MCF.

09/02/81 Acidz w/1000 gals 15% DINEA

09/08/81 AWO Ppg 57 BNO, 109 BSW, 24 hrs BWO 93 BO & 65
BW

06/06/06 POH W/RODS & PMP, RIH W/RODS & PMP

7 7/8" Hole

Tubing/Rod Detail: (11/16/04)

Tubing

177 jts 2-7/8" tbg	8576.01
1 TAC	8479.14
1 SN @	8355.87
1 Blast Jt	10.10
1 IPC tbg	18.00
1 BPMA	31.70
1 Perf Sub	6.00

Rods & Pmp: 06/06/06

2 5" x 1 5" x 24' pmp, 158 - 3/4" (EL)
rods, 97 - 7/8" Grade "D-78" rods,
94 - 1" (EL) rods, 1 - 1" x 4' (EL)
pony rod, 1 - 1" x 2' (EL) pony rod &
1 - 1 5" x 26' PR

Abo Perfs.

4/70

8525-8573, 22 holes

TD 8700'

5 1/2" 17# & 15 5# J-55 set @
8700' Cmt w/3300 sx TILW

PREPARED BY: D. Callier

DATE: 6/14/06