

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-20910 /
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. E-0789-1
7. Lease Name or Unit Agreement Name: Monsanto State /
8. Well Number 7 /
9. OGRID Number 16696 /
10. Pool name or Wildcat Paduca Delaware /

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3401'

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type Steel Depth to Groundwater 290' Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ~~Injection~~

2. Name of Operator
OXY USA Inc. /

3. Address of Operator
P.O. Box 50250 Midland, TX 79710-0250

4. Well Location
Unit Letter M: 330 feet from the south line and 990 feet from the west line
Section 16 Township 25S Range 32E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3401'

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
PLUG AND ABANDON <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
MULTIPLE COMPLETION <input type="checkbox"/>	OTHER: <input type="checkbox"/>
OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

RECEIVED

JUL 07 2008

HOBBS OCD

THE OIL CONSERVATION DIVISION MUST BE
NOTIFIED 24 HOURS PRIOR TO THE BEGINNING
OF PLUGGING OPERATIONS

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 7/1/08

Type or print name David Stewart

E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY Chris Williams TITLE OC DISTRICT SUPERVISOR/GENERAL MANAGER DATE JUL 08 2008

Conditions of Approval, if any:

TD-4700' PERFS-4603-4650'

8-5/8" 24# @ 361' w/ 230sx, 12-1/4" hole, TOC-Surf-Circ

4-1/2" 9.5# csg @ 4700' w/150sx, 7-7/8" hole, TOC-4042'-TS

1. RIH & Set CIBP @ 4525' M&P 30sx cmt to 4200'
2. Perf @ 1200' sqz 70sx cmt to 1000' WOC-Tag
3. Perf @ 411' sqz 150sx cmt to Surface
10# MLF between plugs

OXY USA Inc. - Current
Monsanto State #7
API No. 30-025-20910

12-1/4" hole @ 361'
8-5/8" csg @ 361'
w/ 230sx-TOC-Surf-Circ

7-7/8" hole @ 4700'
4-1/2" csg @ 4700'
w/ 150sx-TOC-4042'-TS

Perfs @ 4603-4650'

TD-4700'


OXY USA Inc. - Proposed
Monsanto State #7
API No. 30-025-20910

150sx @ 411' - Surface

70sx @ 1200-1000' WOC-Tag


30sx @ 4525-4200'

CIBP @ 4525'




Perf @ 411'

12-1/4" hole @ 361'
8-5/8" csg @ 361'
w/ 230sx-TOC-Surf-Circ



Perf @ 1200'

Perf & squeeze cement 50' in 50' out
@ 2300' TAG.

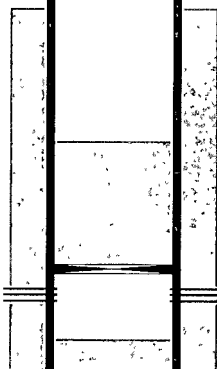

Perfs @ 4603-4650'

7-7/8" hole @ 4700'
4-1/2" csg @ 4700'
w/ 150sx-TOC-4042'-TS

TD-4700'