District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Proposed Alternative Method Permit or Closure Plan Application 1 1 2008

Type of action: Permit of a pit, closed-loop s Closure of a pit, closed-loop s	ystem, below-grade tank, or proposed at the pr
	dividual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of lia environment. Nor does approval relieve the operator of its responsibility to compare the operator of the responsibility to compare the responsibility to the responsibility to the responsibility to compare the responsibility to the responsi	bility should operations result in pollution of surface water, ground water or the bly with any other applicable governmental authority's rules, regulations or ordinances.
Operator: Yates Petroleum Corporation	OGRID #: <u>025575</u>
Address: 105 South Fourth Street, Artesia, NM 88210	
Facility or well name: Hank BMH State Com. #1	Ω_{1} as Ω
API Number: 30-025-39022	OCD Permit Number: PI-DOII9
U/L or Qtr/Qtr JSection 1Township10S	Range 32E County Lea
Center of Proposed Design: Latitude N33.473483 Le	ongitude W103.622475 NAD: ⊠1927 ☐ 1983
Surface Owner: \square Federal \boxtimes State \square Private \square Tribal Trust or Indian	Allotment
Pit: Subsection F or G of 19.15.17.11 NMAC	Closed-loop System: Subsection H of 19.15.17.11 NMAC
Temporary: 🛛 Drilling 🔲 Workover	☐ Drying Pad ☐ Tanks ☐ Haul-off Bins ☐ Other
☐ Permanent ☐ Emergency ☐ Cavitation ☐ Steel Pit	☐ Lined ☐ Unlined
☑ Lined ☐ Unlined	Liner type: Thicknessmil
Liner type: Thickness 20 mil LLDPE HDPE PVC	☐ Other
☑ Other Felt Liner Underneath plastic liner ☑ String-Reinforced	Seams: Welded Factory Other
Seams: 🛛 Welded 🖾 Factory 🗌 Other	Volume:bblyd ³
Volume:13000bbl	Dimensions: Lengthx Width
Below-grade tank: Subsection I of 19.15.17.11 NMAC	Fencing: Subsection D of 19.15.17.11 NMAC
Volume:bbl	☐ Chain link, six feet in height, two strands of barbed wire at top
Type of fluid:	☐ Four foot height, four strands of barbed wire evenly spaced between one and
Tank Construction material:	four feet
Secondary containment with leak detection	Netting: Subsection E of 19.15.17.11 NMAC
☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	☐ Screen ☐ Netting ☐ OtherN/A Temporary Pit
☐ Visible sidewalls and liner	☐ Monthly inspections
☐ Visible sidewalls only	Signs: Subsection C of 19.15.17.11 NMAC
Other	12'x24', 2' lettering, providing Operator's name, site location, and
Liner type: Thicknessmil	emergency telephone numbers
Other	Signed in compliance with 19.15.3.103 NMAC
Alternative Method:	Administrative Approvals and Exceptions:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.
of approval.	Please check a box if one or more of the following is requested, if not leave
	blank: Administrative approval(s): Requests must be submitted to the
	appropriate division district or the Santa Fe Environmental Bureau office for
	consideration of approval. Exception(s): Requests must be submitted to the Santa Fe

Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality						
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division						
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map						
Within a 100-year floodplain FEMA map See Attached Exhibit "A"	☐ Yes ⊠ No					
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC See Attac	See Attached 9 NMAC Ex "B" ched Exhibit "C" ched Exhibit "E" ched Exhibit "F" ched Exhibit "F"					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC						
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de attached. Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.12 NMAC	`19.15.17.9					
Previously Approved Design (attach copy of design) API Number:	· J					



Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the definition of the control of the con	ocuments are
attached. ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	1000S000 1000S000
Proposed Closure: 19.15.17.13 NMAC	
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank Closed-loop System Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for contents.	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No

iste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the					
sure plan. Please indicate, by a check mark in the box, that the documents are attached. See Attached Exhibit "F"					
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC					
 ☑ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☑ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) 					
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC					
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					
iste Removal Closure For Closed-loop Systems That Utilize Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility					
facilities for the disposal of liquids, drilling fluids and drill cuttings.					
Disposal Facility Name: Disposal Facility Permit Number:					
-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate,					
a check mark in the box, that the documents are attached.					
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
Construction and Design of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.13 NMAC					
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC					
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					
erator Application Certification:					
ereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.					
me (Print): Debbie L. Caffall Title: Regulatory Agent					
nature: Date: 7/10/2008					
nail address: debbiec@ypcnm.com Telephone: 575-748-4376					
1010phone. <u>979 710 1970</u>					
, · · · · · · · · · · · · · · · · · · ·					
TD Annroyal: Permit Application (including closure plan) Closure Plan (only)					
Permit Application (including closure plan) Closure Plan (only)					
Permit Application (including closure plan) Closure Plan (only) CD Representative Signature: Approval Date: 7/16/66					
CD Representative Signature: Approval Date: 7/16/05					
CD Representative Signature: Approval Date:					
CD Representative Signature: Approval Date: 7/16/05					
CD Representative Signature: Approval Date: 7/14/65 Desure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC					
Approval Date: 7/14/65 de: 60					
Approval Date: 7/14/65 de: 60 CD Permit Number: 1-00119 Desure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Closure Completion Date: 60 Closure Closure Completion Date: 60 Closure					
Approval Date: 7/14/65 de: 60 CD Permit Number: 60 CD Permit Number: 60 CD Permit Number: 60 Closure Completion Completion Completion Date: 60 Closure Closure Method Closure Closure Method Closure Closure Method Closure Closure Closure Method Closure Closure Method Closure Closure Method Closure Closure Closure Closure Method Closure Closure Closure Closure Method Closure Closure Closure Closure Closure Method Closure Closu					
Approval Date: 7/16/65 Complete Completion Complet					
Approval Date: 7/16/65 Complete Completion Complet					
Approval Date: 7/16/65 Complete Completion Complet					
Approval Date: 7/6/6 de: 90CD Permit Number: 91-00119 District Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Closure Completion Date:					
Approval Date:					
Approval Date: 7/6/65 Dec					
Approval Date:					
Approval Date: 7/6/65 Dec					
Description Completion Comp					
Approval Date:					
D Representative Signature: Approval Date:					
Approval Date:					
Approval Date:					
D Representative Signature: Approval Date:					
Approval Date:					
Approval Date:					

Hank BMH State Com #1 1980' FSL and 1800' FEL Section 1, T10S-R32E Lea County, New Mexico

Our Regulatory Agent has been on site and location shows no sign to be prone to flooding.

Regulatory Agent

7/10/2008 Date



JUL 1 1 2008 HOBBS OCD

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 10S Range: 32E Sections:
NAD27 X: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) ONon-Domestic ODomestic
POD / Surface Data Report Avg Depth to Water Report
Water Column Report
Clear Form iWATERS Menu Help

AVERAGE DEPTH OF WATER REPORT 07/09/2008

 Bsn
 Tws
 Rng
 Sec
 Zone
 X
 Y
 Wells
 Min
 Max
 Avg

 RA
 10S
 32E
 08
 175
 175
 175
 175

Record Count: 1



Hank BMH State Com #1 1980' FSL & 1800' FEL Section 1, T10S-R32E Lea County, New Mexico Exhibit "B"

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 10S Range Sections:

NAD27 X Y. Zone. Search Radius

County. Basin: Number. Suffix

Owner Name: (First) (Last) Non-Domestic Domestic All

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report


POD / SURFACE DATA REPORT 07/09/2008

								(quarters are	T = NM	2=NE 3	=SW 4=SE)		
		(acre ft	per annum)					(quarters are	bigg	est to	smallest	X Y a:	re in Feet
UTM	1 are in Mete	rs)	Start	Finish	Depth	Depth (in feet)						
DB	File Nbr	Use Div	ersion Owner			POD	Number	Source	Tws	Rng Se	cqqq	Zone	x
UTM	1 Zone Eastı	ng Northi	ng Date	Date	Well	Water							
RA	09484	DOM	9 JOHNSO	V CATTLE CO	YNAGMC	RA	09484		10S	32E 20	4 3 1		
13	621396	3699404	01/01/1914 0	1/01/1914	70								
RA	09485	DOM	9 JOHNSO	N CATTLE CO	DMPANY	RA	09485		10S	32E 20	3 4		
13	621093	3699299	01/01/1993 0	1/01/1993	70								
RA	09486	DOM	9 [5~ JO	HNSON CATTI	LE COMPANY	RA	09486		10S	32E 20	3 4 3		
13	620992	3699198	01/01/1914 0	1/01/1914	70								
RA	09487 ,	STK	3 JOHNSO	N CATTLE CO	MPANY	RA	09487	,	10S	32E 18	4 3 3		
13	619755/	3700788	01/01/1900 0	1/01/1900	60								
RA	09488	STK	3 JOHNSO	N CATTLE CO	OMPANY	RA	09488		10S	32E 17	1 2 3		
													. Erm.
13	620965	3702010	01/01/1900 0	1/01/1900	100								
RA	10569	STK	3 BUTTON	MESA RANCI	H WATTS LAI	ND & RA	10569		10s	32E 08	1 4 1		
13	620957	3703414			198	175		·					4集日

Record Count: 6



Y

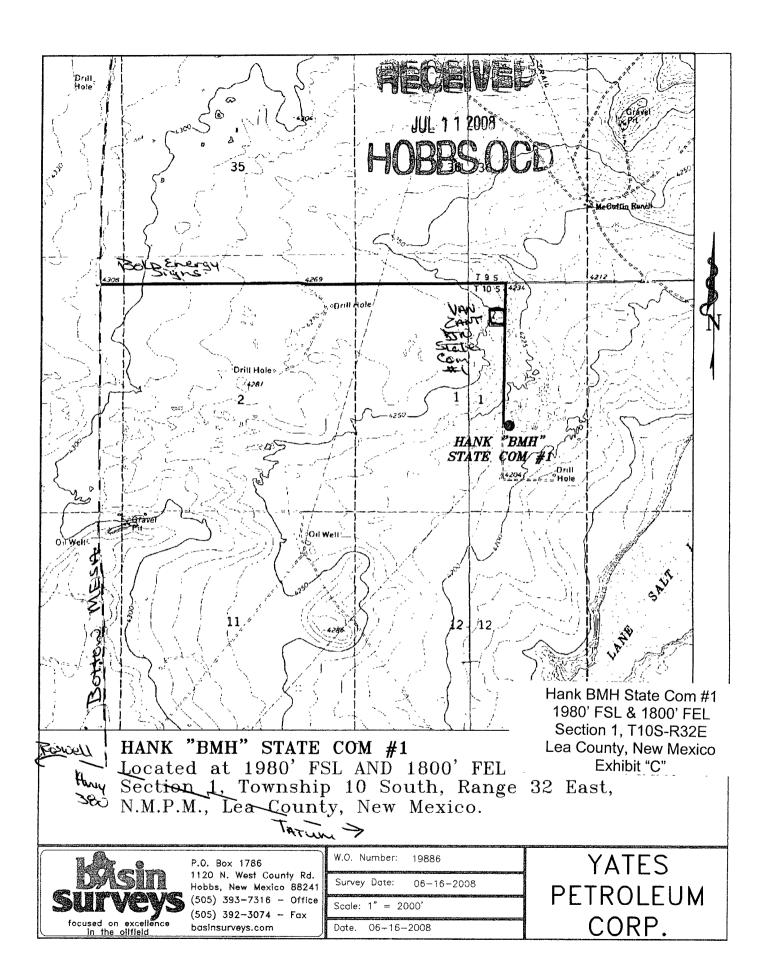

Yates Petroleum Corporation Design Requirements for Temporary Reserve Pit

Sign posted on site / location or on the fence of reserve pit identifying the operator, listing their phone #, location of site by ½ / ½ or unit letter, and S-T-R.

Pit must be fenced to prevent unauthorized access. Fence must remain in good repair. Fence to be barbed wire, space at 1 foot intervals from 1' to 4' off ground.

Slope of the pit walls is no greater than two vertical feet to one horizontal foot.

Welded liner seams must run up & down the banks of the pit, not horizontally across them.

Field seams must be welded.

Edges of the liner must be anchored in trenches at least 18 inches deep. Edge of liner will protrude from the outside edge of the trench.

Pit shall be designed to prevent to run on of surface water.



Yates Petroleum Corporation Drilling Operations Requirements for Temporary Reserve Pit.

While the drilling rig is onsite, Operator's representative will inspect the temporary pit daily to ensure that the liner is intact, and that no releases are occurring.

Thereafter, the operator shall inspect at least once weekly as long as liquids remain in the temporary pit.

Operator will maintain a log of such inspections and make the log available to the appropriate NMOCD District office upon request.

A copy of the inspection log shall be filed with the NMOCD when operator closes the pit.

Operator must notify NMOCD if liner is damaged, and must repair or replace the damaged liner. Operator has 48 hours to notify NMOCD and make repairs.

NO HOLES in pit liners – not even in the part of the liner that is not in the reserve pit.

All drilling fluids to be removed from temporary pit within 30 days of rig release date

Hydrocarbon based drilling fluids will be stored in steel pits.


Liner -will be 20mil., string reinforced with welded seams.

Fluids to be added to pit through a header, diverter, or other hardware that prevents damage to liner by erosion, fluid jets, or impacts from installations and removal of hoses or pipes.

Operator shall have onsite an oil absorbent boom or other device to contain and remove oil from a pits surface.

Operator must maintain a freeboard of at least two feet for a temporary pit.

Pit will be bermed to prevent run on of water into the pit.



AECEIVED

Closure Procedure For Temporary Drilling Pits

JUL 11 2008 HOBBS OCD

1. De-water pit within 30 days of rig release.

proper disposal.

2. Weekly inspection of fluid level in drilling pit after rig release date until fluids are removed. Weekly levels will be recorded in a log to be submitted to the appropriate OCD district office at time of pit closure.

3.	All removed pit fluids will be disposed of in an OCD approved manner at one of the listed OCD approved disposal facilities.
	Disposal Facility: Gandy Marley
	Disposal Facility Permit Number: NM-01-0019
4.	If fluids are reclaimed the appropriate OCD district office will be contacted beforehand for approval to do so.
5.	Within 6 months of the rig release date and after the removal of all free liquids from the temporary drilling pit, the surface owner will be notified by certified mail, return receipt requested that the operator will close the pit. OCD division office will be notified verbally that waste excavation and removal will begin.
6.	All impacted contents of the temporary drilling pit will be stabilized by mixing of dry non-waste containing earthen material so that such material will pass a paint filter test.
7.	All stabilized pit contents, including the synthetic pit liner will be loaded into trucks and transferred to the division-approved facility listed below for


Disposal Facility: Gandy Marley

Disposal Facility Permit Number: NM-01-0019

8. Once all visually impacted materials have been removed from the temporary drilling pit, testing and analyzing of the soils beneath the pit will be conducted in accordance with 19.15.17.13, B., 1(b) (i) or (ii) whichever is appropriate to determine if a release has occurred during utilization of the pit.

Hank BMH State Com #1 1980' FSL & 1800' FEL Section 1, T10S-R32E Lea County, New Mexico Exhibit "F"

- 9. When analysis indicates that the soils within the pit area are within the recommended actions levels backfilling will begin.
- 10. Backfill material will consist of non-waste containing earthen material. The cleaned out drilling pit will be filled with such material to a level which shall allow space for the addition of topsoil which will be equal to the thickness of the background topsoil or one foot whichever is greater as directed in 19.15.17.13, H (1) NMAC.
- 11. The topsoil cover will be placed on to the drilling pit area in a manner of existing grade and will prevent ponding of water and erosion of the cover material.
- 12. Within 60 days of closure completion a closure report on form C-144 will be submitted to the appropriate district office. The report will contain detailed information on the backfilling, capping. The closure report will also include a plat of the closed pit location on a form C-105.
- 13. Within the first growing season after the approved pit closure seeding of the pit area shall occur. The seeding will be performed in accordance with 19.15.17.13, I, (2) (3) (4) (5).



MARTIN YATES, III

FRANK W YATES



105 SOUTH FOURTH STREET ARTESIA, NEW MEXICO 88210-2118 TELEPHONE (575) 748-1471

S P. YATES CHAIRMAN EMERITUS

JOHN A. YATES CHAIRMAN OF THE BOARD

FRANK YATES, JR.

PEYTON YATES
DIRECTOR

JOHN A. YATES, JR.

July 10, 2008

Oil Conservation Division 1625 N. French Drive Hobbs, NM 88240

RE: C-144

Hank BMH State Com #1 Section 1, T10S-R32E Lea County, New Mexico

To Whom It May Concern:

Enclosed please find two copies of the C-144 with attachments for the above referenced well.

Should you have any questions please contact Debbie L. Caffall at (575) 748-4376.

Thank you.

YATES PETROLEUM CORPORATION

Monti Sanders

Monti Sanders Regulatory Tech

/ms

Enclosure(s)

aegeived

JUL 1 1 2008 HOBBS OCD