Form C-144 June 24, 2008

<u>District I</u>
1625 N. French Dr , Hobbs, NM 88240
<u>District II</u>
1301 W. Grand Avenue, Artesia, NM 88210
<u>District III</u>
1000 Rio Brazos Road, Aztec, NM 87410
<u>District IV</u>
1220 S. St Francis Dr , Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method				
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request				
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the				
	ply with any other applicable governmental authority's rules, regulations or ordinances.			
Operator:CHI OPERATING, INC.				
Address:P.O. BOX 1799 MIDLAND, TX 79702				
Facility or well name:SUNRISE 25-1				
API Number: 30-025-39007 OCD Permit Number: P1-00 113				
U/L or Qtr/QtrA Section25 Township18S	Range37ECounty:LEA			
Center of Proposed Design: Latitude	Longitude NAD:1927 1983			
Surface Owner: Federal State Private Tribal Trust or Indian	Allotment			
Pit: Subsection F or G of 19.15.17.11 NMAC	☐ Closed-loop System: Subsection H of 19.15.17.11 NMAC			
Temporary Drilling Workover	☐ Drying Pad ☐ Tanks ☒ Haul-off Bins ☐ Other			
☐ Permanent ☐ Emergency ☐ Cavitation ☐ Steel Pit	☐ Lined ☐ Unlined			
☐ Lined ☐ Unlined	Liner type: Thickness mil			
Liner type: Thicknessmil	Other			
Other String-Reinforced	Seams: Welded Factory Other			
Seams: Welded Factory Other	Volume:bblyd ³			
Volume: bbl Dimensions: L x W x D	Dimensions: Lengthx Width			
Below-grade tank: Subsection I of 19.15.17.11 NMAC	Fencing: Subsection D of 19.15.17.11 NMAC			
Volume:bbl	☐ Chain link, six feet in height, two strands of barbed wire at top			
Type of fluid:	Four foot height, four strands of barbed wire evenly spaced between one and			
Tank Construction material:	four feet			
Secondary containment with leak detection	Netting: Subsection E of 19.15.17.11 NMAC			
☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	☐ Screen ☐ Netting ☐ Other			
☐ Visible sidewalls and liner	Monthly inspections			
☐ Visible sidewalls only	Signs: Subsection C of 19.15.17.11 NMAC			
☐ Other	12'x24', 2' lettering, providing Operator's name, site location, and			
Liner type: Thickness mil HDPE PVC	emergency telephone numbers			
Other	Signed in compliance with 19.15.3.103 NMAC			
Alternative Method:	Administrative Approvals and Exceptions:			
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.			
of approval.	Please check a box if one or more of the following is requested, if not leave			
	blank: Administrative approval(s): Requests must be submitted to the			
	appropriate division district or the Santa Fe Environmental Bureau office for			
	consideration of approval. Exception(s): Requests must be submitted to the Santa Fe			

Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17 MMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No NA			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No			
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No			
Within a 100-year floodplain FEMA map	☐ Yes ☐ No			
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.				
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
Previously Approved Design (attach copy of design) API Number: or Permit Number:				
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
Previously Approved Design (attach copy of design) API Number:				

Permanent Pits Permit Application Checklist: section B of 19.15.17.9 NMAC		
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de	ocuments are	
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC		
☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC		
 Quality Control/Quality Assurance Construction and Installation Plan □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC □ Nuisance or Hazardous Odors, including H₂S, Prevention Plan 		
 ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 		
Proposed Closure: 19.15.17.13 NMAC		
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank Closed-loop System	7 Alternative	
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial		
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for con	nsideration)	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC		
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.		
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA	
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells		
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No	
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No	
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No	
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No	
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No	
Within a 100-year floodplain FEMA map	☐ Yes ☐ No	

Form C-144

Waste Excavation and Removal Closure Plan Casklist: (19.15.17.13 NMAC) Instructions: Each of following items must be attached to the				
closure plan. Please indicate, by a check mark in the box, that the documents are attached.				
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC				
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)				
☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				
Waste Removal Closure For Closed-loop Systems That Utilize Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility				
or facilities for the disposal of liquids, drilling fluids and drill cuttings.				
Disposal Facility Name: R9166				
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate,				
by a check mark in the box, that the documents are attached.				
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC				
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Construction and Design of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC				
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC				
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)				
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC				
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				
She Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.13.17.13 NMAC				
Operator Application Certification:				
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.				
Name (Print):PAM CORBETT Title:ENGINEER TECH				
Signature: Date:6/18/08				
Signature: Date:6/18/08				
e-mail address:pamc@chienergyinc.com Telephone:432-625-5001 432-661-8360				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Representative Signature: Approval Date: 7/15/09 Title: OCD Permit Number: Plan (only)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
OCD Representative Signature: Approval Date: 7/5/02				
OCD Representative Signature:				
OCD Approval: Permit Application (including closure plan)				
OCD Representative Signature: Approval: Permit Application (including closure plan) Closure Plan (only)				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Representative Signature:				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Representative Signature:				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Representative Signature:				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Representative Signature:				
OCD Approval: Permit Application (including closure plan)				
DCD Approval: Permit Application (including closure plan) Closure Plan (only)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				
DCD Approval: Permit Application (including closure plan) Closure Plan (only)				
OCD Approval: Permit Application (including closure plan)				
OCD Approval: Permit Application (including closure plan)				

CHI OPERATING, INC. –SUNRISE STATE 25-1

A- Sec. 25, T18S R37E: 495' FNL & 691' FEL LEA Co., NM

DESIGN: Closed Loop System with roll-off steel bins (pits)

CRI/Hobbs will supply (2) bins () volume, rails and transportation relating to the Close Loop system. Specifications of Close Loop System attached.

Contacts: Gary Wallace 432-638-4076 Office # 575-393-1079

Scomi Oil Tool: Supervisor: Armando Soto – 432-553-7978 Hobbs, NM

Monitoring 24 hour service

Equipment:

Centrifuges (brand): Derrick Rig Shakers (brand): Brandt

D-watering Unit

Air pumps on location for immediate remediation process Layout of Close Loop System with bins, centrifuges and shakers attached.

Cuttings and associated liquids will be hauled to a State regulated third party disposal site: CRI (Controlled Recovery, Inc.) Disposal Facility Permit # R9166 wm -01- poo6


- 2-250 bbl tanks to hold fluid
- 2- CRI Bins with track system
- 2- 500 bbl frac tanks for fresh water
- 2-500 bbl frac tanks for brine water

OPERATIONS:

Closed Loop equipment will be inspected daily by each tour and any necessary maintenance performed. Maintain beak showing when inspections made. Call Any leak in system will be repaired and or/contained immediately OCD will be notified within 48 hours of the spill. Remediation process started immediately

CLOSURE:

During drilling operations all liquids, drilling fluids and cuttings will be hauled off via CRI (Controlled Recovery Incorporated) Disposal Facility Permit #-R9166 WM. 01-0006 permit member.

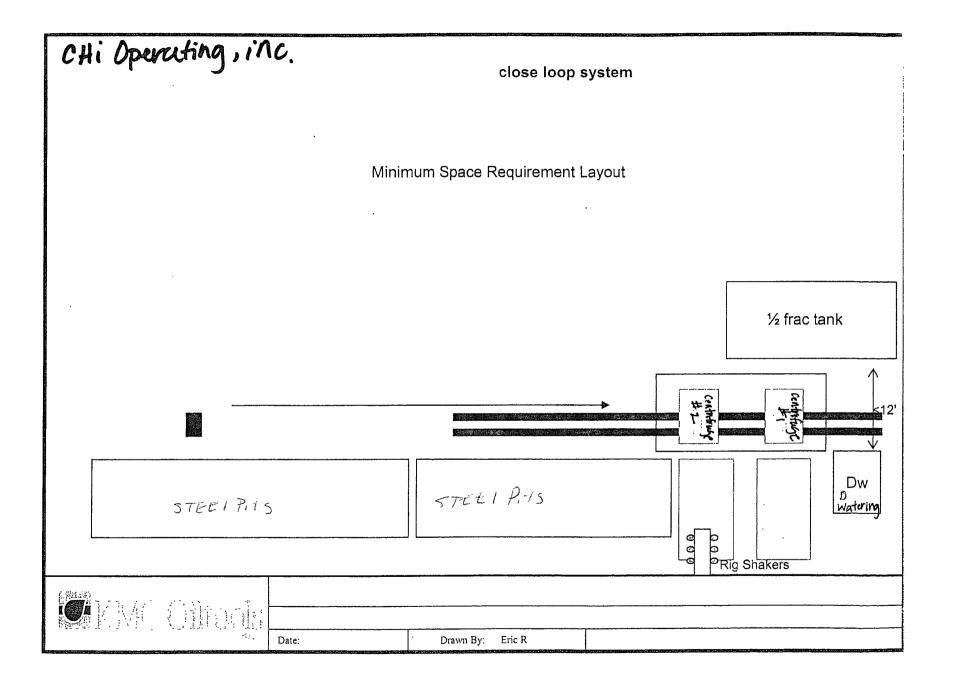

SPECIFICATIONS

Heavy Duty Split Metal Rolling Lid

FLOOR= 3/16" PL one piece

CROSS MEMBER: 3 x 4:1 channel 16" on

WALLS: 3/16" PL solid welded with tubing

top, insi**⊲**e liner hooks

DOOR: 3/16" PL with tubing frame FRONT: 3/16" PL slant formed. PICK UIP: Standard cable with 2" x 6" x 1/4"

rails, gursset at each crossmember

WHEELS: 10 DIA x 9 long with rease fittings DOOR LATCH: 3 Independent ratchet binders with chains, vertical second latch GASKETS: Extruded rubber seal with metal

WELDS: All welds continuous except substructure crossmembers

FINISH: Coated inside and out with direct to metal, rust inhibiting acrylic enamel color coat HYDROTESTING: Full capacity static test DIMENSIONS: 22'-11" long (21'-8" inside),

99" wide (88" inside), see drawing for height OPTIONS: Steel grit blast and special paint.

Ampliroll, Heil and Dino pickup ROOF: 3/16' PL roof panels with tubing and channe I support frame


LIDS: (2) 68" x 90" metal rolling lids spring loaded, self raising

ROLLERS: 4" V-groove rollers with delrin bearings and grease fittings

OPENING: (2) 60" x 82" openings with 8" divider centered on container

LATIOH:(2) independent ratchet binders with chains

per lid GASKETS: Extruded rubber seal with metal retainers

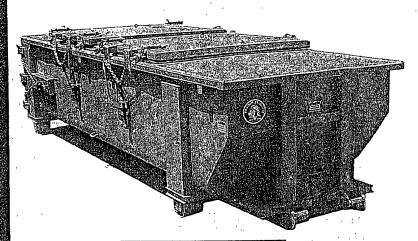

CONT.	Α	В
20 YD	41	53
25 YD	53	65
30 YD	65	77

