



**Monument 12 State #8**

API# 30-025-33920

419' FSL & 1801' FWL

S12, T19S, R36E, UNIT N

MONUMENT ABO UNIT

Lea County, New Mexico

**PROCEDURE TO TEMPORARILY ABANDON WELL:**

Notify OCD/BLM 24 hrs prior to work commencing.

1. Verify anchors have been set & tested.
2. MIRU PU. ND WH. NU BOP.
3. Pull rods, pump and 2-7/8" tubing.
4. TIH w/4-3/4" bit, csg scraper on 2-7/8" WS. Make bit trip to 7200'. POH.
5. Set CIBP @ 7200' or within 75' of csg shoe (7250'). Dump 35' cmt on top of plug. (new PBTD 7165')
6. TIH w/2-7/8" WS & tag TOC (7165'). Circ csg w/corrosion inhibited pkr fluid. TOH.
7. Perform MIT (500 psi for 30 min). If test fails, contact Jerry Poole for further instructions.
8. ND BOP. NU WH. RD PU.
9. Clean and clear location.

Jerry Poole

Office phone: 432-687-7165

Cell phone: 432-556-0332

## Monument State "12" #8

## Location:

419' FSL, 1801' FWL, Sec 12, T-19S, R-36E  
**Unit Letter:** N  
**Field:** Monument Abo, North  
**County:** Lea  
**State:** NM  
**Area:** Hobbs

## Well Info:

**Spud Date:** 5/5/97  
**Comp. Date:** 6/12/97  
**API:** 30 025 33920  
**RefNO:** BL9195  
**Status:**  
**Lease:** State

**Current**  
**Wellbore Diagram**

## Elevations

<b>DF:</b>	3740
<b>KB:</b>	3741
<b>GL:</b>	3728

(9/97)

**Tbg Detail:**

	length	depth
2 7/8 6.5# J-55 EUE BRD TBG	7197.38	13.00
2 7/8" x 5 1/2" TAC 45K SET @ 32" 18 PTS	2.72	7210.38
2 7/8 6.5# J-55 EUE BRD TBG	122.06	7213.10
2 1/8" SEATING NIPPLE BRD	1.10	7335.16
2 1/8" 6.5# J-55 8D EUE PERF SUB	4.10	7336.26
2 7/8 6.5# J-55 EUE BRD TBG	32.12	7340.36
		7372.48

**Rod Detail:**

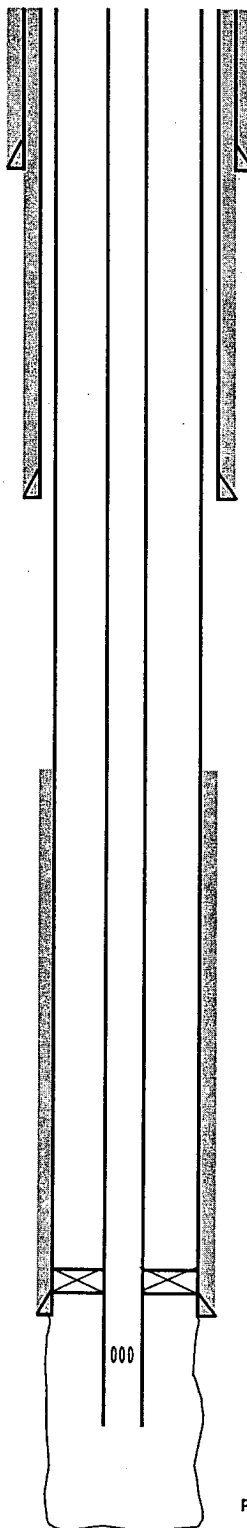
1 1/2" X 26' POLISH ROD SM 7/8" PINS	26.00	26.00
7/8" X 4' PONY ROD N-97 FHSM	4.00	30.00
7/8" X 25' N-97 FHSM	3400.00	3430.00
3/4" X 25' N-97 FHSM	3175.00	6605.00
1 1/2" X 25 FLEX-BARS W/NECKS GRADE "C"	728.00	7333.00
25-125-RHBC-24-2-0-0 40-R PA HGEN 358 3/5/99 FT	24.00	7357.00
INSTALLED RIGHT HAND BACK OFF TOOL *****		
1 1/4" X 12' GAS ANCHOR		

**Formation tops**

Rustler	1352
T. Salt	1451
B. Salt	2556
Yates	2698
7 Rivers	2975
Queen	3574
Penrose	3709
Grayburg	3891
San Andres	4345
Delaware	4693
Bone Spring	5328
Tubb	6625
Drinkard	6795
Abo	7155
Abo Dolomite	7383

TAC SET W/18 PTS

SN @ 7335'  
 PERF SUB  
 MAJ W/BPOB  
 EOT @ 7372' (9/97)

**Surface Casing**

Size: 13 3/8"  
 Set: @ 406'  
 With: 440sx  
 Hole Size: 17 1/2"  
 Circ: yes  
 TOC @ surface  
 Wt: 48#

**Intermediate Casing**

Size: 8 5/8"  
 Set: @ 2760'  
 With: 800sx  
 Hole Size: 11  
 Circ: yes  
 TOC @ Surface  
 Wt: 24# K55

**Production Casing**

Size: 5 1/2"  
 Set @: 7250'  
 With: 625sx  
 Hole Size: 7 7/8  
 TOC: 4210'  
 Wt.: 15.5#  
 Grade: K-55

Updated: 28-May-03

By: CASSIE TAYLOR

\*\*find older WBDs already on the O drive

7 7/8" OPEN HOLE F/ 7250'---7516'

PBTD: 7516'  
 TD: 7516'