Form 3160-5 (November 1994)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD-HOBBS

FORM APPROVED OMB No. 1004-0135

OWR	10. 1	004-	013
 Expires	July	31,	199

•	BUREAU OF LAND	MANAGEMENT	L	Expires July 31, 1996
				5. Lease Serial No.
	SUNDRY NOTICES AND	REPORTS ON WELLS		NM-3622
Do n	ot use this form for propo		an	6 If Indian, Allottee or Tribe Name
aband	doned well. Use form 316	0-3 (APD) for such propos	sals.	
				7. If Unit or CA/Agreement, Name and/or No.
SUBMIT IN TRI	PLICATE - Other instructi	ons on reverse side		
1. Type of Well		~ ¬ 2009		
X Oil Well Gas Well	Other	JN 27 2008		8. Well Name and No.
2. Name of Operator		monn	\	Scout 18 Federal Battery
Cimarex Energy Co. of Colorad		add uul	<i>,</i>	9. API Well No.
3a. Address	C 0250 m	3b Phone No. (include are	a code)	Various
PO Box 140907; Irving, TX 7501	L4-0907	972-401-3111	-	Field and Pool, or Exploratory Area
4. Location of Well (Footage, Sec , T., R., M.,				Tonto; 7 Rivers
Various Footages	,,		-	11. County or Parish, State
18-19S-34E				Lea County, NM
12. CHECK APP	ROPRIATE BOX(ES)	TO INDICATE NATUR	E OF NOTICE	, REPORT, OR OTHER DATA
TYPE OF SUBMISSION			OF ACTION	, , , , , , , , , , , , , , , , , , , ,
			-	
Notice of Intent	Acidize	Deepen	Production (Start/Re:	sume) Water Shut-Off
	Alter Casing	Fracture Treat	Reclamation	Well Integrity
X Subsequent Report	Casing Repair	New Construction	Recomplete	Other
	Change Plans	Plug and Abandon	, . 1	
			Temporarily Abandor	
Final Abandonment Notice	Convert to Injection		Water Disposal	
13. Describe Proposed or Completed Operation If the proposal is to deepen directionally or Attach the bond under which the work will following completion of the involved operatesting has been completed. Final Aband determined that the site is ready for final in	recomplete horizontally, give subside performed or provide the Bond tions of the operation results in a conment Notices shall be filed only	surface locations and measured ar No. on file with BLM/BIA. Require multiple completion or recompletio	nd true vertical depths d subsequent reports on in a new interval, a	of all pertinent markers and zones. shall be filed within 30 days Form 3160-4 shall be filed once
Cinaguay Francis Ca. of Calavad		numerial for disposal of m		want the Court 10 Foderal Batton and
the attached Water Production		The state of the s	roduced water t	rom the Scout 18 Federal Battery per
the attached water Froduction	i and Disposal informatic	л.		
Scout 18 Federal No. 1	/ 30-025-37 83 0	1800 FSL & 410 FWL		APPROVED
Scout 18 Federal No. 2	30-025-37892	710 FSL & 660 FWL		MITIONED
Scout 18 Federal No. 3	30-025-37893	810 FSL & 1830 FWL	/	
Scout 18 Federal No. 4	30-025-37880	1750 FSL & 2030 FEL		JUN 2 2 2008
Scout 18 Federal No. 5	/	660 FSL & 2030 FEL		0011 22 2000
Scout 18 Federal No. 6	30-025-37884	660 FSL & 660 FEL		LANGE OF THE PARTY
Scout 18 Federal No. 7	30-025-38248	1650 FSL & 1980 FW	L /	JAMES A. AMOS SUPERVISOR-EPS
Scout 18 Federal No. 8	/ 30-025-38249	1650 FSL & 695 FEL		L. Control
Scout 18 Federal No. 13	J 30-025-38048	1980 FNL & 510 FWL	. /	
14. I hereby certify that the foregoing is true as	ad porroot			
Name (Printed/Typed)	ia correct	Title		
Netella Kaussa			L	
Natalie Krueger Signature		Regulatory Ana	iyst	
		, Date		
· Vatalu Ku	ceal-	February 15, 20		
	/ THIS SPACE FO	R FEDERAL OR STATE (OFFICE USE	

Title 5

Conditions of Approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

- --

Office

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Water Production & Disposal Information

Scout 18 Federal Battery (Wells 1,2,3,4,5,6,7,8, & 13)

In order to process your disposal request, the following information must be completed:

- 1. Name of formations producing water on this lease: Tonto; 7 Rivers
- Amount of water produced from all formations in barrels per day:
 210.2 bpd
- 3. Attach a current water analysis of produced water from all zones showing at least the total dissolved solids, PH, and the concentrations of chlorides and sulfates (one sample will suffice if the water is commingled):

 Attached
- 4. How water is stored on this lease: 2 500 bbl fiberglass tanks
- 5. How water is moved to the disposal facility: Trucked
- 6. Identify the disposal facility by:
 - A. Facility Operator's Name: Louray Oil Company, LLC
 - B. Name of facility or well name and number: Government E No. 1
 - C. Type of facility or well (WDW, WIW, ect.: SWD
 - D. Location by ¼ ¼ SESW section 25 township 19S range 34E
- 7. Attach a copy of the state-issued permit for the Disposal Facility.

Submit to this office (414 West Taylor; Hobbs, NM 88240) the above-required information on a sundry notice 3160-5. Submit 1 original and 5 copies within the required time frame. This form may be used as an attachment to the sundry notice. Call me at 505-393-3612 if you need to further discuss this matter.

CAPITAN CHEMICAL WATER ANALYSIS REPORT

Cimarex Co, of Colorado

Date Sampled: 11/09/06

Lease Name :

Scout

Capitan Rep. : Joe Hughes

Well Number :

Battery (Water Leg)

Company Rep. : Cliff Johnson - Joe Carrillo

Location

Lea County New Mexico

A	N	ΑI	LY	S	IS

1	. pH	5.43					
2	. Specific Gravity @ 60/60 F.	1.162					
3	. CaCO3 Saturation Index @ 80 F.	+0.375		'Calcium	Carbo	nate Scale Pos	sible'
	@ 140 F.	+2.585		'Calcium	Carbo	nate Scale Pos	sible'
	Dissolved Gasses						
4.	. Hydrogen Sulfide	0		PPM			
5.	. Carbon Dioxide	794		PPM			
6.	Dissolved Oxygen	Not Determined					
	Cations	mg/L	1	Eq. Wt.	=	MEQ/L	
7.	Calcium (Ca++)	10,200	1	20.1	=	507.46	
, 8 .	Magnesium (Mg++)	. 4,496	1	12.2	=	368.48	
9.	Sodium (Na+) Calculated	77,173	1	23.0	=	3,355.37	
10.	Barium (Ba++)	Not Determined	1	68.7	=	0.00	
	Anions						
11.	Hydroxyl (OH-)	0	7	17.0	=	0.00	
12.	Carbonate (CO3=)	0	1	30.0	=`	0.00	
13.	Bicarbonate (HCO3-)	342	1	61.1	=	5.59	
14.	Sulfate (SO4=)	18	1	48.8	=	0.37	
` 15.	Chloride (Cl-)	150,000	1	35.5	=	4,225.35	
	Other						
16.	Soluble Iron (Fe)	550	7	18.2	=	30.22	
17.	Total Dissolved Solids	242,229					
18.	Total Hardness As CaCO3	44,000					
	Calcium Sulfate Solubility @ 90 F.	1,321					

0.060

Logarithmic Water Pattern

20. Resistivity (Measured)

PROBABLE MINERAL COMPOSITION

@ 70

Degrees (F)

Ohm/Meters

<u>ت</u>	5	S04	S
1,000			
100 🕂	$\overline{}$		
10 +			
7			
1 			
10 +			
100 +			
1,000			
10,000			
S.	ပ်	₩g	Fe

COMPOUND	Eq. Wt.	X	MEQ/L	=	mg/L
Ca(HCO3)2	81.04	Х	5.59	=	453
CaSO4	68.07	Х	0.37	=	25
CaCl2	55.50	Х	501.50	=	27,833
Mg(HCO3)2	73.17	Х	0.00	=	0
MgSO4	60.19	Х	0.00	=	0
MgCl2	47.62	Х	368.48	=	17,547
NaHCO3	84.00	Х	0.00	=	. 0
NaSO4	71.03	Х	0.00	=	0
NaCl	58.46	Х	3,355.37	=	196,155



STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION HOBBS DISTRICT OFFICE

BRUCE KING GOVERNOR

/ed

3-3-94

POST OFFICE BOX 1980 HOBBS, NEW MEXICO 88241-1980 (505) 393-6161

	**** · ***	. ~			
P. 0. 1	NSERVATION DIVISION BOX 2088 FE, NEW MEXICO 8750		5WD-5	E. 4	
M DH NS NS SV WF	ND X				
Gentlen	nen:				
Subsum Operato	examined the applications are	Disposed Inc Lease & Well No.	Government Unit S-T-R	E 1-N 25-19	?-34
Jerry S	ery truly, Nexton Sor, District 1				

OIL CONSERVATION DIVISION FOR OFFICE BOX 2008 STATE LAND OFFICE BURDING SANTA PENEW MEASURE 2551

FORM C-108 Revised 7-1-81

APPLI	CATION FOR AUTHORIZATION TO INJECT
I.	Purpose: Secondary Recovery Pressure Maintenance X Discosal Storage Application qualifies for administrative approval? Tyes Tho
11.	Operator: Subsurface Water Disposal, Inc.
	Address: P.O. Box 1002 Hobbs, NM 88241
	Contact party: Lowell B. Deckert Phone: (505) 393-9161
III.	Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.
IV.	Is this an expansion of an existing project? yes no If yes, give the Division order number authorizing the project
٧.	Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
• VI.	Attach a tabulation of data on all wells of public record within the area of review whic penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
VII.	Attach data on the proposed operation, including:
	 Proposed average and maximum daily rate and volume of fluids to be injected; Whether the system is open or closed; Proposed average and maximum injection pressure; Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
+VIII.	Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the
IX.	Describe the proposed stimulation program, if any.
* x.	Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)
* XI.	Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
XII.	Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.
XIII.	Applicants must complete the "Proof of Notice" section on the reverse side of this form.
XIV.	Certification
	I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
	Name: Lowell B. Deckert Title Consultant
	Signature: Date: 2-24-194
	e information required under Sections VI. VIII, \lambda. and XI above has been previously tted, it need not be duplicated and resubmitted. Please show the date and circumstance e earlier submittal.

III. WELL DATA

- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
 - Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
 - (2) Each cosing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
 - (3) A description of the tubing to be used including its size, lining material, and setting depth.
 - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- 8. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
 - (1) The name of the injection formation and, if applicable, the field or pool name.
 - (2) The injection inter/al and whether it is perforated or open-hole.
 - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
 - (4) Give the depths of any other perforated intervals and detail on the sacks of cemert or bridge plugs used to seal off such perforations.
 - (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells;
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.




SUBSURFACE WATER DISPOSAL, INC.


P.O. BOX 1002 HOBBS, NEW MEXICC 88241-1002

Proposed Work To Convert Well To Salt Water Disposal Service:

Government "E" # 1 (formerly Armstrong Energy Corp., Lea Bone Springs producing well): Unit "N", Section 25, Township 19 South, Range 34 East, Lea Co., New Mexico


- 1) MIRU pulling unit. Make bit and scraper trip to PBTD: 10,277'
- 2) Perforate Bone Springs interval: 9716' to 9746'. (present Bone Springs perfs.: 9716' to 9720')
- 3) Acidize Bone Springs perfs 9716' to 9746' with 2500 gallons NE Fe 15% hydrochloric acid.
- 4) Take injectivity test.
- 5) Set $5\frac{1}{2}$ " packer on wireline @ 9700'.
- 6) Run 2 7/8" injection tubing and one joint tailpipe.
- 7) Displace tubing-casing annulus with fresh water and packer fluid.
- 8) Stab into packer and test annulus for 30 minutes @ 500 psi.
- 9) Place on injection and take injectivity test.

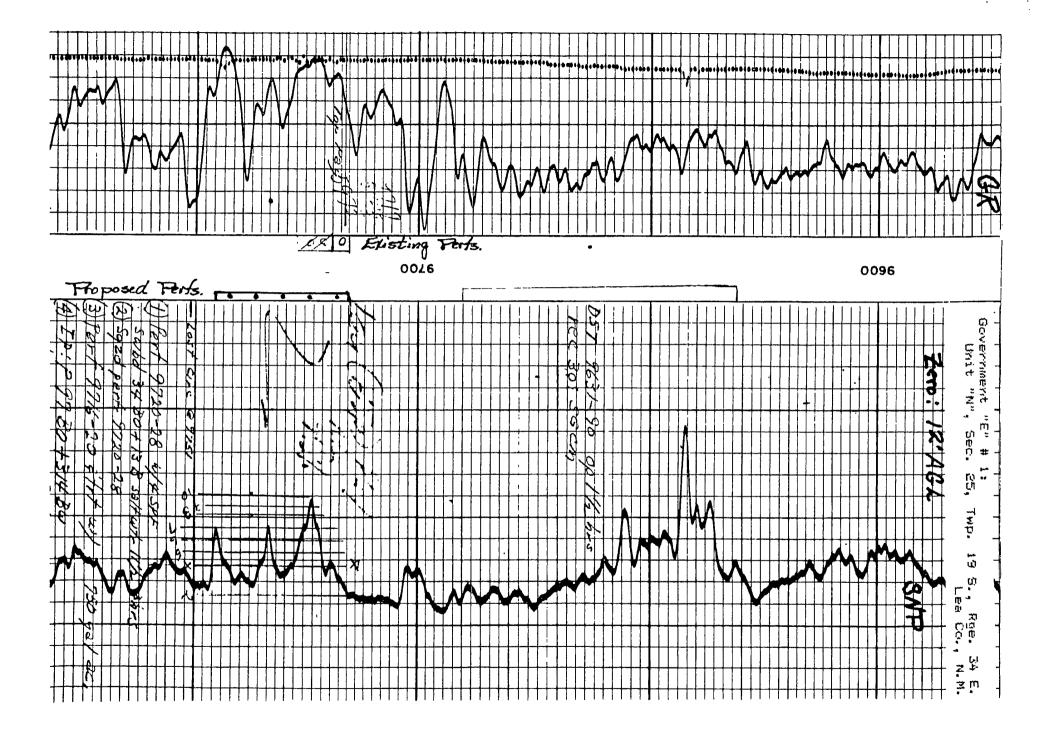

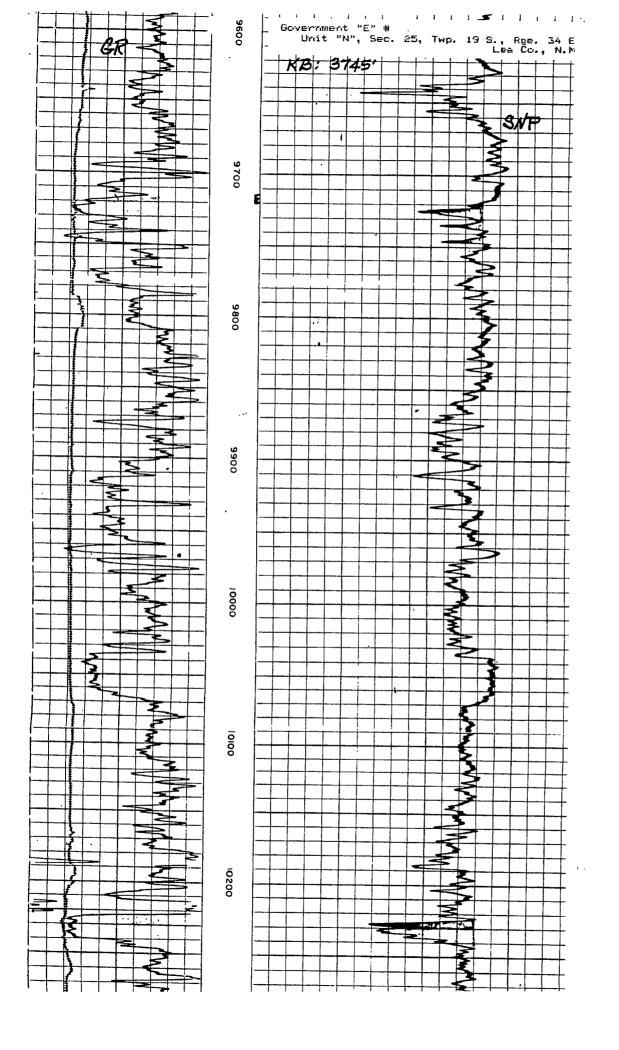

Armstrong Energy Corp.			DATE 2-7-	94
Government 'E'	WELL 114	LOCATION 1880'FW & 6	10' FSL Sec 25,	
			Lea Cou	inty, NM
chematic of Present Condi	tion of Pro	posed	8.4.	
sposal Well		100	uler Data	
7777411	Surface Casi	-		
	Size 11 3/4" s	et @ 400'	Comented wi	th 450
	TOC surface	e 10	et determined b	y circ.
-11 11-	Hole size	15*	•	
11 11				
11 11				
11 11				
- 11 11				
- 11 11				
11 11				
11 11				

Intermediate Casing Size 8 5/8" set @ 4089" 775 11" BS perfs:9716-20' TOC (5½"):7700' 500 7 7/8***** TOC 7700

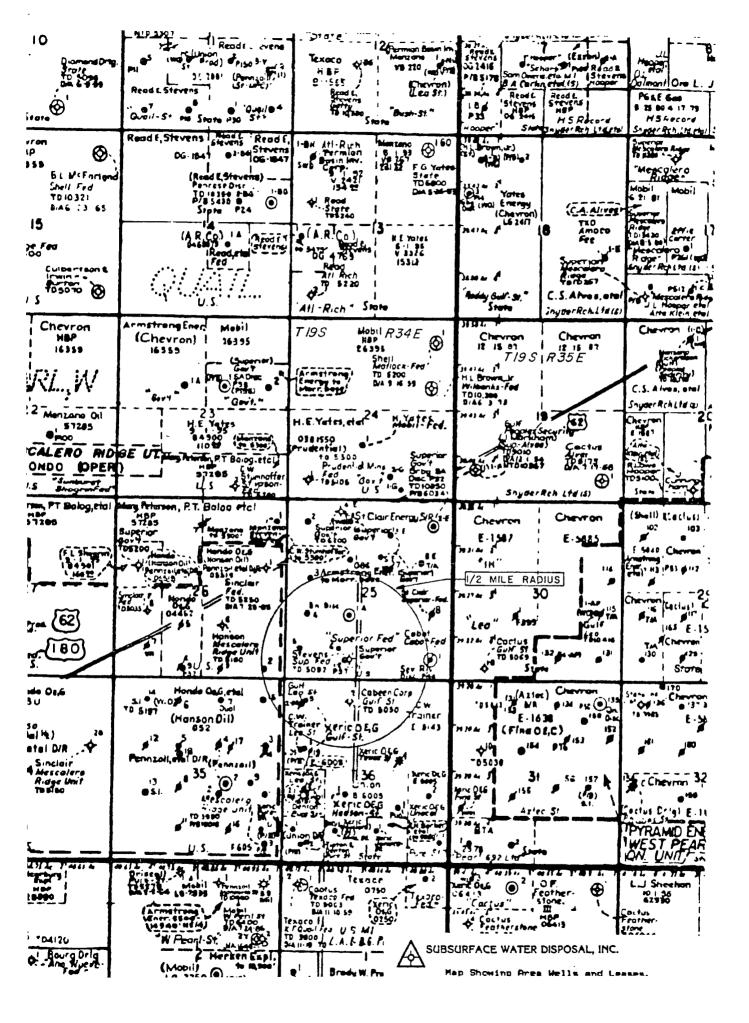

Gulf Oil (Corp.	DATE 2-7-94
Lea 'DS' S	State	2 Location 770'FN & 560'FWL Sec36-T19S-R34E Lea County, NM
sax plug:0-30' sax plug: 270' sax plug:367' sax plug:912'-1040' cut 8 5/8" @ 990'		Surface Casing: Size: 13 3/8" set @ 355
sax plug: 1850-1950' sax plug: 2100-60' plug: 2210'-2358' cut 5½" @ 2327'		(5½"): 2360' (8 5/8"): 3210'
: sax plug:5300-5400'		Intermediate Cabing: Size: 8 5/8 " set # 4049 Cemerited with: 265 Bank Hole Size: 11 TOC # 3210
Sax plug:9300-50' BP:9350' Derfs:9692-9706' PB:9742'		Production Casing: Size: 5½ " set @ 9770 Cemerted with: 585 sax Hole Size: 7 7/8 " TOC = 2360

Tabulation of All Wells Within ½ Mile of Proposed Disposal Well: Government "E" #1, "N" Sec. 25, Twp. 19 S., Rge. 34 E., Lea Co., N.M.

Location	Operator	Lease & Well #	Pool	Compl. Int.	T.D.	Status
E25-19-34 K25-19-34 J25-19-34 M25-19-34 N25-19-34 P26-19-34 C36-19-34 D36-19-34	St.Clair Energy St.Clair Energy St.Clair Energy St.Clair Energy St.Clair Energy Devon Energy Cabeen Corp. Mack Energy Gulf Oil	Superior Fed. #3 Superior Fed. "A" #1 Superior Fed. # 4 Superior Fed. # 5 Superior Fed. # 6 Mescalero Rdg. Ut. 26 # 2 Gulf St. # 2 Gulf St. # 3 Lea St. "DS" # 2	Pearl Queen Lea Bone Spr.	4808'-5019' 4796'-4806' 4781'-5013' 4882'-4986' 4811'-5015' 4623'-4972'	5150' 5112' 5150' 5150' 5150' 5150' 5050' 5148'	Prod. Prod. Prod. Prod. Prod. S1 Prod. D & A SI Prod.



WATER ANALYSIS for ARMSTRONG ENERGY

Date of Analysis: OCTOBER 12, 1992

Company:

ARMSTRONG ENERGY

State:

N/D

Leasa:

GOVERNMENT E #1

Oil (bbl/day):

N/D

Type of Water: Sample Source:

PRODUCED WELL HEAD

Representative:

DON BLACKSTOCK

Analysis #: 1757 Company Address: N/D

Pield: Well #:

N/D # 1

Water (bbl/day):

Temp.,C:

N/D 17

Date of Sampling: Analysis By:

OCTOBER 11, 1992 SUZANNE WILLIAMS

WATER ANALYSIS PATTERN

(number beside ion symbol indicates me/l scale unit)

	12	8	4	0	4	8	12
Fe+++ 1.0	12						C03 1.0
	111					 	S04 10.0
Mg++ 100.0							1 1003 10.0
Ca++ 10.0	╼┼╼╌┼						HC03- 10.0
Call						╂╂╂╂	Cl- 1000.0
Na+ 1000.0		_	1 1 1 1	1 1 1 1 1	3 I I		

DISSOLVED SOLIDS

DISSOLVED GASES

CATIONS	me/l	mg/l
Total Hardness :	300 00	-3/+
Calcium, (Ca++)	100.00	2004.81
Magnesium, (Mg++):	200.00	2430.28
Iron, (Fe+++)	0.81	15.00
Barium, (Ba++)	N/D	N/D
Sodium, Na+(calc): Manganese, (Mn++):	1767.38 0.00	40649.65

Hydrogen sulfide: 0.00 mg/1 Carbon dioxide : 308.88 mg/1Oxygen mg/1N/D

PHYSICAL PROPERTIES

SCALE STABILITIES

pН 6.05 Spec Grav. : 1.100 TDS (calc.) :119215.45

Chloride, Cl-2028.17 71997.52 Bulfate, 504--: 26.01 1250.00 :arbonate, CO3--: 0.00 0.00 licarbonate, HCO3-: 14.00 854.18 lydroxyl,OH-: 0.00 0.00

0.00

:

'OTAL SOLIDS (quant.):

Temp., C CaCO3 Ca804 B4804 17.0 -0.48 5491 ٥ 27.0 -0.31 5708 0 37.0 -0.10 6002 0 Max entity, (calc.) 1836 0 RESIDUAL HYDROCARBONS: N/D

/D = not determined

ulfide, s--

CATTONO

ANIONS

320 °C...CALCIUM SULFATE SCALING IS UNLIKELY. @20 C...MODERATE CORROSIVE.

119201.40

0.00

Subsurface Water visposal,	Inc.	1 2	-7-94
Government 'E'	WELL HO	1880'FW & 610'FSL	Sec25,T19S,R34E
			Lea County, NM

	72111117	Animis An	Surface Casing: Size, 11 3/4= set Hole Size, 15	• 400 , come. • Toc • Circ	Mad withs 450 sa.
sg-tbg annulus illed w/corros nhibited pkr.:	sion	Ammunimmunimi	Intermediate Camin Sizes 85/8 set 11	91 4089 1 C111111111111111111111111111111	nd with:775 sax
00' of 2 7/8" astic -lined g. set oninjec cker	tion (1)	шишшшш	½"):7700'		
oposed B.S. pe 16-20' resent B.S. pe 716-46')	erfs	PBTD:10,	Production Casings	0,300 · c	TD: 10,300
		lined		teriel) 0700	eet in e
Baker Mode (brand	d and model	-	packer	•t <u>9700</u>	feet
	•	_	Bone Springs (pe		
J. Is this s	now woll d	rilled for in	Lea Bone Sp. jection?	Ø No	oil production
A. Hon the we	ll ever hee	n perforated	In any other zono(a)? cement or bridge plu	list all such per	fereted intervals
end give p					



SUBSURFACE WATER DISPOSAL, INC.

P.O. BOX 1002 HOBBS NEW MEXICO 882:1-1002

February 23, 1994

Oil Conservation Division
New Mexico Energy, Minerals and
Natural Resources Dept.
P.O. Box 2088
Santa Fe, NM 87501

Re: Application for a Commercial Salt Water Disposal Well, Government "E" #1, 1880 feet from the west line and 610 feet from the south line of Section 25, Township 19 South, Range 34 East, Lea Bone Springs Pool, Lea County, New Mexico

Gentlemen:

Subsurface Water Disposal, Inc. hereby makes application to convert the subject Bone Springs producing well to a Bone Springs water disposal well. (Details of the proposed conversion are outlined on an attached sheet.)

The Government "E" #1 was completed in 1971 as a Bone Springs production well, perforations 9716' to 9720', and is presently operating at its economic limit. Cumulative production totals 182 MBO, 517 MMcf, and 121 MBW.

The closest active Lea Bone Springs producing well is over one mile from this proposed disposal well. The only penetrating wellbore within the one-half mile area of review is a plugged Lea Bone Springs producer located 770 feet from the north and 560 feet from the west lines of Sec. 36, Twp. 19 S., Rge. 34 E. (See attached plat.) The plugging detail for this well is provided on an attached diagramatic sketch.

Overlying oil and gas pools in the area are: the Pearl Seven Rivers (oil and gas) at a depth of 3900 to 4000 feet, the Pearl Queen (oil) at a depth of 4600 to 5200 feet, the Pearl San Andres (oil) at a depth of 5200 to 5300 feet, and the Lea San Andres (oil) at a depth of 6000 to 6100 feet. A listing of all wells within one half mile and their completion interval is provided in an attached tabulation. There are no underlying oil and gas pools in this area.

The applicant requests approval to dispose of produced water in the Bone Springs interval from 9716 feet to 10,240 feet. The disposal system will be a closed system and we request a maximum surface injection pressure of 2000 psi. We anticipate initial disposal by gravity. The maximum disposal volume is estimated at 3000 barrels per day with a monthly average rate of approximately 2000 barrels per day. The produced water that we propose to dispose of will come from various sources in the area, such as: the Yates-Seven Rivers, Queen, Grayburg-San Andres, Delaware, and Bone Springs. An informal survey of oil operators indicated a need for a salt water disposal well in this area. The water produced from the Bone Springs formation has a total solids of 120,000 ppm and a chloride content of 72,000 ppm as shown on the attached

chemical analysis. We plan to test the chemical compatibility of the disposal waters and will chemically treat before injecting into the Bone Springs if needed to prevent plugging problems.

As shown on the attached diagramatic sketch, we propose to equip this well with a string of 2 7/8 inch plastic lined tubing equipped with an injection packer set at approximately 9700 feet. The casing-tubing annulus will be filled with corrosion inhibited packer fluid with the provision for surface monitoring.

The Bone Springs is of mid-to-late Permian in age and occurs at a depth of from 9500 to 10,200 feet in this area. It is described as a dolomite, sucrosic in part, with intercrystalline and vuggy porosity. The vugular porosity and possible fractures in the Bone Springs should make this an excellent disposal zone.

A physical review of the area and check with the State Engineer's office in Roswell, revealed no fresh water wells within one mile of the proposed disposal well. We have examined the available geologic and engineering data and have found no evidence of open faults or any hydrologic connection between the disposal zone and an underground source of drinking water. Furthermore, the shallow formations and the salt section will be protected by three cemented casing strings, and injection tubing and packer.

Enclosed are two copies of this application, along with Form C-108, a marked plat of the surrounding area, a tabulation of all wells within one-half mile, three diagramatic wellbore sketches, chemical analysis of Bone Springs formation water, and proposed work outline.

Certified copies of this application have been sent to all oil operators within the one-half mile area of review, the surface owner, and the Oil Conservation Division, Hobbs District Office. (We are currently pursuing BLM approval for operating on federal land.)

A notice of publication will be forwarded as soon as possible.

Subsurface Water Disposal, Inc. asks for administrative approval of this application.

Respectfully submitted by,

Jovell B. pelalent

Lowell B. Deckert, Agent for Subsurface Water Disposal, Inc.

Copies sent to:

Offset Operators:

Devon Energy Corp., 1500 Mid-America Tower, 20 North Broadway, Oklahoma City, OK 73102

Mack Energy, P.O. Box 276, Artesia, NM 88210

St. Clair Energy Corp., P.O. Box 1392, Midland, TX 79702

Surface Owner:

U.S. Department of the Interior, Bureau of Land Management, P.O. Box 1778, Carlsbad, NM 88221

Firm 3160-5 Prometly 3-331) DEPARTMENT (THE BUREAU OF LAND MANA	NTERIOR (Other Instructions of	CONS. COMMISSION
SUNDRY NOTICES AND REPORT OF THE PROPERTY OF THE PROPERTY OF THE PROPERTY OF THE PERMIT	ORTS ON WELLS HOBBS. N	
OIL AND OTERS		7. UNIT MORREMENT DAME
NAMES OF STREAMS		& 748M 00 LEAGE BANK
ARMSTRONG ENERGY CORPORATION		Government "E"
P.O. Box 1973, Roswell, New Mexico	88202	1
LOCATION OF WELL (Report location clearly and in accordance for also apase 17 below.) At markets	with any State requirements.	10. FIBLE AND POSE, OR WILECAS
1880' FWL & 610' FSL		Lea-Bone Spring
PRAMIT BO. : 15. SLEVATIONS (Show w	harbar as as as as	Sec. 25, T19S, R34E
		Lea NM
Check Appropriate Box To Ind	icale Nature of Notice, Report, o	
NOTICE OF INTENTION TO:		INCUSET ASPORT OF:
TEST WATER REUT-OFF PULL OR ALTER CASING	WATER SHUT-OFF	BEPAIRING WELL
PRACTURE TREAT MULTIPLE COMPLETE SMOOT OR ACIDIES ARAHIMAN	FRACTUBE TERATMENT	ALTESING CASING
SEPAIR WELL CHANCE PLANS	(Other) NTL-2B	ABANDON MENTO
(Other) ARE HED PROPRIED OR COUPLETED OF RATION: (Clearly state all proposed work. If well is directionally drilled, give animard seat to this work.)	(NUTE Report rest	its of multiple completion on Well Lipietion Report and Log form.)
Pursuant to NTL-2B regulations, disposal: A) This lease produces water f. B) 10 BWPD. C) Water analysis is included by N/A E) Water is moved by buried pip F) Devon Energy waterflood state.	rom the San Andres formatwith this notice.	cion.
CL ES		E SE IVED
Hr 27 15 Bure Hoses, 1		: ". · · · · · · · · · · · · · · · · · ·
GMED The Way TITLE	Operations Supervisor	DATE 05-26-93
his opace for Federal or State office use)		.n . t
PROVED BY	,	DATE JUN 1 7 Part
see attached		

WATER ANALYSIS REPORT furnished by TRETOLITE CHEMICALS

COMPANY:

ARMSTRONG ENERGY

LEASE:

GOVERNMENT (SAN ANDRES)

SAMPLE POINT:

HEATER TREATER

SAMPLE DATE:

SAMPLE TEMP. :

6.4 pH:

H2S:

+

SPECIFIC GRAVITY: 1.185

TITRATED AND CALCULATED IONS

	MILLIGRAMS PER LITER	MILLIEQUIVALENTS PER LITER
нсоз	122.00	2.00
Cl	155490.00	4380.00
SO4	0.00	0.00
Ca	20000.00	1000.00
Mg	5589.00	458.11
Na	67249.36	2923.89

IONIC STRENGTH = 5.12

TOTAL HARDNESS = 73000.0 mg/ltr.

TOTAL DISSOLVED SOLIDS = 248296.8 mg/ltr.

TOTAL IRON (Fe) = 1.0 ppm

PROBABLE MINERAL COMPOSITION AND ION PAIRING

	MILLIEQUIVALENTS	MILLIGRANS
	PER LITER	PER LITER
Ca(HCO3)2	2.00	162.08
Caso4	0.00	0.00
CaC12	998.00	55389.00
Mg(HCO3)2	0.00	0.00
Mg304	0.00	0.00
HgCl2	458.11	21815.43
NaHCO3	0.00	0.00
Na2804	0.00	0.00
NaC1	2923.89	170930.30

CALCULATED SCALING TENDENCIES

SCALING INDEX

CaCO3 @ 80 DEG F. = 1.2 -CaCO3 @ 120 DEG F. = 1.9

SATURATION POINT

CaSO4 @ 70 DEG F. = 609.2 MG/LTR. CaSO4 @ 110 DEG F. = 653.9 MG/LTR.

Disposal of Produced Water From Federal Wells Conditions of Approval

Approval of the produced water disposal methodology is subject to the following conditions of approval:

- That this agency be notified of any change in your method or location of disposal.
- 2. Compliance with all provisions of NTL-2B.
- This agency shall be notified of any spill or discharge as required by NTL-3A.
- 4. This agency reserves the right to modify or rescind approval whenever it determines continued use of the approved method may adversely affect the surface or subsurface environments.
- 5. All aboveground structures on the lease shall be painted sandstone brown, Federal Std. 595-20318, or 30318, within 90 days if you have not already done so.
- 6. Any on lease open top storage tanks shall be covered with a wire screen to prevent entry by birds and other wildlife.
- 7. This approval should not constitute the granting of any right-of-way or construction rights not granted by the lease instrument.
- 3. If water is transported via a pipeline that extends beyond the lease boundary, then you need to submit within 30 days an application for right-of-way approval to the Realty Section in this office if you have not already done so.