DEC DY ZUG

OCD-HOBBS

Form 3160-5 UNITED STATES
(August 2007)

HOBBSOCD DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010
Lease Serial No.

5 Lease Serial No NM067982B SUNDRY NOTICES AND REPORTS ON WELLS 6 If Indian, Allottee or Tribe Name Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals. 7 If Unit of CA/Agreement, Name and/or No SUBMIT IN TRIPLICATE - Other instructions on page 2 1 Type of Well 8 Well Name and No Lusk Seven Rivers Unit #4 Oil Well Gas Well 2 Name of Operator Tandem Energy Corporation 9 API Well No 30-025-21639 3b Phone No (include area code) 10 Field and Pool or Exploratory Area 3a Address Lusk: Seven Rivers, North 432-686-7136 P.O. Box 1559, Midland, TX 79702 11 Country or Parish, State 4 Location of Well (Footage, Sec., T.R., M., or Survey Description) Lea, NM 1980' FSL & 660' FWL Sec 3, T19S, R32E, Unit Letter L 12 CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION Water Shut-Off Acidize Deepen Production (Start/Resume) ✓ Notice of Intent Well Integrity Alter Casing Fracture Treat Reclamation Casing Repair New Construction Recomplete Other Subsequent Report Plug and Abandon Change Plans Temporarily Abandon Plug Back Water Disposal Final Abandonment Notice Convert to Injection 13 Describe Proposed or Completed Operation Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones Attach the Bond under which the work will be performed or provide the Bond No on file with BLM/BIA Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection Plug #1 - 25 sx "C" (1 32 yd/14 2#) 3778 Circ 9# brine with 12.5#/bb/ge) 32 yd/14.2#) 100' in/100' out - WOC and tag "C" (1 32 yd/14 2#) 100' in/100' out - WOC and tag 40 sx "C" (1.32 yd/14 2#) 100' out/385' in - visual

SEE ATTACHED FOR CONDITIONS OF APPROVAL

14 I hereby certify that the foregoing is true and correct Name (Printed Typed)		
Randy Poston	Title Drilling Superintendent	t .
Signature	Date 10/23/2008	ADDROVED
THIS SPACE FOR FEDERAL OR STATE OFFICE USE APPLICATION OF THE STATE OF		
Approved by	Title	DEC 3 2008 ;
Conditions of approval, if any, are attached. Approval of this notice does not warrant or ce that the applicant holds legal or equitable title to those rights in the subject lease which wo entitle the applicant to conduct operations thereon.	ertify	JAMES A. AMOS
Title 18 U S C Section 1001 and Title 43 U.S C Section 1212, make it a crime for any pe fictitious or fraudulent statements or representations as to any matter within its jurisdiction		

TANDEM ENERGY CORPORATION LUSK SEVEN RIVERS #004

INJECTION WELL

CURRENT STATUS 10-23-2008 Wellbore Diagram

337'

Elevation=3674'
60-70'
BAD CASING

Legals:

ls: 1980' FSL & 660' FWL

SEC 3, TS-19S, R-32E

API#:

30-025-21639

Surface Hole: 11"

Surf. Csg.: 8 5/8" 20# 8R R-E Cmt'd w/ 125 SX TOC @ surface

County: LEA, NM

Field: LUSK. SEVEN RIVERS, NORTH

Formation Tops:

SALT BASE 2710'
YATES 2895'
SEVEN RIVERS 3855'

Well History:

Drilled. Dec-65

CAL TOC @ 3200'

Production Hole: 7 7/8"

PERFS 3816' - 3820'

Prod Csg.: 4 1/2" 10.50 K-55


3847' TD=3860'

Cmt'd w/ 125 SX

TANDEM ENERGY CORPORATION LUSK SEVEN RIVERS #004

INJECTION WELL

POST PLUGGING STATUS Wellbore Diagram

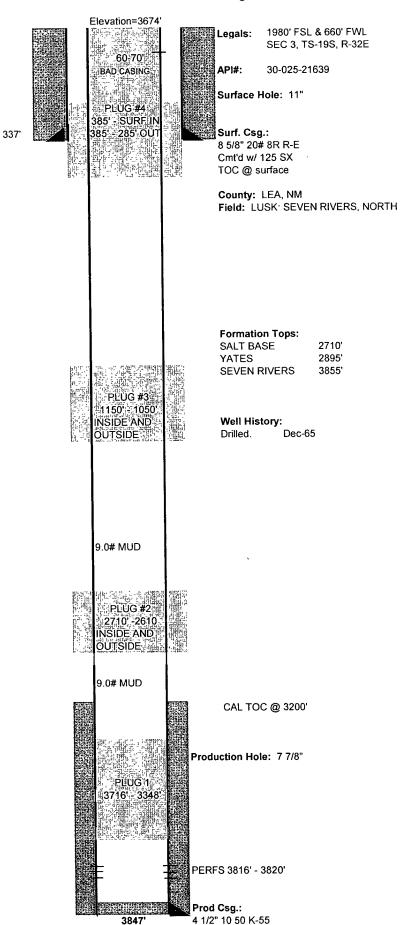

TD=3860'

Cmt'd w/ 125 SX

Tandem Energy Corporation NMLC067982B: Lusk Seven Rivers Unit #4 1980' FSL & 660' FWL Sec. 3, T19S-R32E Lea County, New Mexico

RE: Plugging and Abandonment Requirements, Conditions of Approval

- 1. Spot a plug from 3847'-3707' (25 sx min.), WOC and tag no lower than 3707', or, set a CIBP between 50'-100' above the top perforation and cap with 35' of cmt if using a dump bailer or 25 sack cmt plug if not using a dump bailer.
- 2. Perforate the 4-1/2" casing @ 2775', squeeze with adequate cmt to fill 130' in/out of the 4-1/2" casing (2775'-2645'). WOC and tag no lower than 2645' (covers the base of salt).
- 3. Perforate the 4-1/2" casing @ 1440', squeeze with adequate cmt to fill 100' in/out of the 4-1/2" casing (1440'-1340'). WOC and tag no lower than 1340' (covers the top of salt).
- 4. Perforate the 4-1/2" casing @ 387', squeeze with adequate cmt to circulate cmt to surface and leaving the 4-1/2" full.
- 5. Top off and visually verify cement. Cut off wellheads and cap. Install dry hole marker.

See attached standard COA's.

James A. Amos 575-234-5909

12/3/08

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in a cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).
- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration conditions of approval will be developed and furnished to you.