Submit 3 Copies To Appropriate District  State of New Mexico	Form C-103
Office State of New Mexico  District I  1625 N. French Dr., Hobbs Progress II  District II	June 19, 2008
1625 N. French Dr , Hobbs	WELL API NO.
District II 1301 W Grand Ave., Artesia, DEC 22 2006 OIL CONSERVATION DIVISION District III 1220 South St. Francis Dr.	30-025-35449 <b>/</b> 5. Indicate Type of Lease
District III 1220 South St. Francis Dr.	STATE STATE FEE
1000 Rio Brazos Rd., Aztec, NM 87410 District IV Santa Fe, NM 87505	6. State Oil & Gas Lease No.
District IV 1220 S. St. Francis Dr., Santh OBBSOCD	
87505	VA-978
SUNDRY NOTICES AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH	Breeze AYF State Com
PROPOSALS)	8. Well Number
1. Type of Well: Oil Well 🔯 Gas Well 🔀 Other	1
2. Name of Operator	9. OGRID Number
Yates Petroleum Corporation	025575
3. Address of Operator	10. Pool name or Wildcat Austin; Morra
105 South Fourth Street, Artesia, NM 88210	South Morton, Wolfcamp, East
4. Well Location	
Unit Letter I : 1980 feet from the South line and	990 feet from the <u>East</u> line
Section 4 Township 15S Range 35E	NMPM Lea County
11. Elevation (Show whether DR, RKB, RT, GR, etc.	
4006' GR	
12. Check Appropriate Box to Indicate Nature of Notice,	Report or Other Data
NOTICE OF INTENTION TO: SUB	SEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ REMEDIAL WOR	
TEMPORARILY ABANDON CHANGE PLANS COMMENCE DR	
PULL OR ALTER CASING   MULTIPLE COMPL   CASING/CEMEN	T JOB
DOWNHOLE COMMINGLE	
OTUED.	
OTHER:  OTHER:  OTHER:  OTHER:	d give pertinent dates, including estimated date
of starting any proposed work). SEE RULE 1103. For Multiple Completions: At	
or recompletion.	F. 1
Propose to plug & abandon as follows:	DDD MOIL // DDD 6 1
<ol> <li>MIRU plugging equipment. ND wellhead. NU BOP. Load hole &amp; release pkr. Relea</li> <li>Set CIBP @ 10,025' w/35' of cement.</li> </ol>	se RBP. TOH w/tbg, RBP & pkr.
<ol> <li>Set CIBP @ 10,025' w/35' of cement.</li> <li>TIH w/tbg &amp; circulate hole with mud.</li> </ol>	
4. Cut casing @ 9000'. Pull casing. If casing will not pull, TIH w/pkr & attempt to pum	p into casing cut. Spot 100' cement plug inside
and outside casing from 9000 to 8900'. $-\omega o C - TAG$	
5. Cut 7" casing @ 5950'. Pull casing.	
<ul><li>6. TIH w/tbg &amp; spot a 150' cement plug 6000 to 5850'. WOC &amp; tag.</li><li>7. Spot 100' cement plug 4600 to 4500'. Spot 100' cement plug 1950 to 1850'.</li></ul>	
8. Spot 100' cement plug 450 to 350'. WOC & tag.	
9. Spot 60' plug @ surface.	
The same of the same same same same same same same sam	Conservation Division Must be notified
' = · · ·	s prior to the beginning of plugging operations
Spud Date: Rig Release Date:	
I hereby certify that the information above is true and complete to the best of my knowledg	e and belief.
	4
SIGNATURE Climate TITLE Regulatory Compliance	e Technician DATE 12/19/08
Type or print name Allison Barton E-mail address: abarton@yatespetroleum	m.com PHONE: (575) 748-4385 .
For State Use Only  OC DISTINCT SUPERVISOR/GEN	DEC 2 4 2008
APPROVED BY: Jany W. Lill TITLE	DATE
Conditions of Approval (if any):	Dilli
y	


 Well Name:
 Breeze AYF State Com No. 1
 Field:

 Location:
 1980' FSL & 990' FEL Sec. 4-15S-35E
 Chaves Co., NM

 GL:
 4006'
 Zero:
 AGL:
 KB: 4026'

 Spud Date:
 09-29-01
 Completion Date:
 Comments:

Casing Program			
Size/Wt/Grade/Conn	Depth Set		
13 3/8" 48#, H-40 8R ST&C	400'		
9 5/8" 36 & 40# NS80 & J55	5902'		
7" 26# P110, N80, J55, L80	12085'		
4 1/2" 11.6# P-110	13805'-11806'		

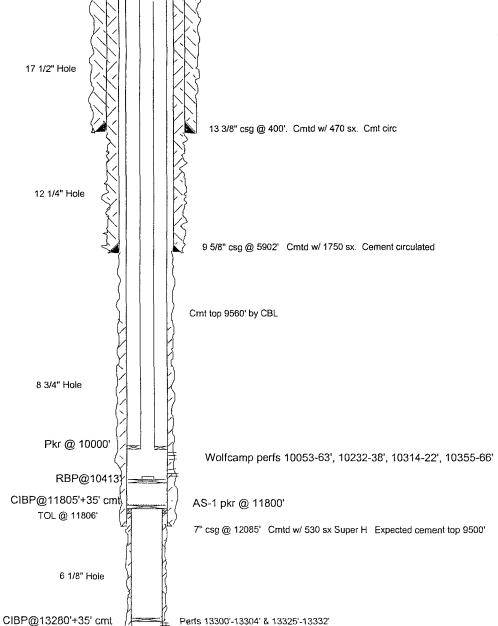

**Current Configuration** 

DATE: 12/17/08 BREEZED

4 1/2" liner @ 13805' Cmtd w/ 130 sx

PBTD 13763' TD 13805'

Well Name	Breeze AYF	State Com No. 1 Fiel	d:	
Location:	1980' FSL & 99	0' FEL Sec 4-15S-35E	Chaves Co., N	M
GL: 4006'	Zero: _	AGL:	KB:	4026'
Spud Date:	09-29-01	Completion Date:		
Comments:				

Casing Program			
Size/Wt/Grade/Conn	Depth Set		
13 3/8" 48#, H-40 8R ST&C	400'		
9 5/8" 36 & 40# NS80 & J55	5902'		
7" 26# P110, N80, J55, L80	12085'		
4 1/2" 11.6# P-110	13805'-11806'		

60' cement plug at surface. 17 1/2" Hole 100' cement plug 450' to 350' WOC and tag 13 3/8" csg @ 400' Cmtd w/ 470 sx Cmt circ. 100' cement plug 1950'-1850' 100' cement plug 4600' to 4500'. 12 1/4" Hole 9 5/8" csg @ 5902'. Cmtd w/ 1750 sx Cement circulated Cement plug 6000' to 5850'. WOC and tag. Cut 7" csg @ 9000' 100' cement plug 9050' - 8950'. WOC and Tag. 8 3/4" Hole Cmt top 9560' by CBL CIBP@10025+35' cmt Wolfcamp perfs 10053-63', 10232-38', 10314-22', 10355-66' CIBP@11805'+35' cmt/s TOL @ 11806' 7" csg @ 12085' Cmtd w/ 530 sx Super H Expected cement top 9500' 6 1/8" Hole CIBP@13280'+35' cmt Perfs 13300'-13304' & 13325'-13332' 4 1/2" liner @ 13805' Cmtd w/ 130 sx

**Proposed Configuration** 

DATE: 11/15/07 BREEZED

PBTD 13763' TD 13805'