

RECEIVEDForm 3160-5
(April 2004)

JAN 09 2009

UNITED STATES

1625 N. French Drive

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Hobbs, NM 88240

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007**HOBBS NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well



Oil Well



Gas Well



Other

2. Name of Operator

John R. Stearns DBA Stearns

3a. Address

HC 65 Box 988 Crossroads, NM 88114

3b. Phone No. (include area code)

575-675-2356

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980 FSL X 330 FEL

Unit Letter I, Section 35, T7S, R31E Chaves County, NM

5. Lease Serial No.

NM-046153-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Miller Federal # 007

9. API Well No.

30-005-21012

10. Field and Pool, or Exploratory Area

Tom-Tom San Andres

11. County or Parish, State

Chaves, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION



Notice of Intent



Subsequent Report



Final Abandonment Notice



Acidize



Alter Casing



Casing Repair



Change Plans



Convert to Injection



Deepen



Fracture Treat



New Construction



Plug and Abandon



Plug Back



Production (Start/Resume)



Reclamation



Recomplete



Temporarily Abandon



Water Disposal



Water Shut-Off



Well Integrity



Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Well Data - Spud 1/15/1985

8 5/8" 24# casing set at 1227ft in 12 1/4" hole. Cemented with 600 sacks cement. Cement circulated to surface

4 1/2" 9.5# casing set at 4182ft in 7 7/8" hole. Cemented with 250 sacks Lite cement. TOC calculated at 2614ft

Perforations 3972-4145ft Top of Yates 2086ft Top of San Andres 3226ft

Recent WO operations to recover the parted tbg string the casing collapsed x while attempting to swedge casing, 4 1/2" casing parted at 1252ft and was pulled out of the well. Numerous attempts were made to get back inside the 4 1/2" unsuccessfully.

Stearns proposes to plug and abandon as follows.

Run 8 5/8" Cement Retainer and set at 1175ft x cement squeeze with 100 sacks cement x sting out of retainer dump 75ft of cement on top of retainer x pull tubing and setting tool x Run tubing and tag cement cap 1100ft + or -

Displace well with gelled BW

Pull tbg to 350feet and circulate cement to the surface

Remove well head and install NMOCD regulation marker

Enclosed before and after well diagrams

No cmt. on RETAINER unless 1000# sep., displace thru CICK, woc.
Pressure test under CICK before cmt. on top of CICK.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Billy E. Prichard

Title Agent for John R. Stearns DBA Stearns

Signature

Date

12/16/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

/S/ DAVID R. GLASS

Title PETROLEUM ENGINEER

Date

DEC 31 2008

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


(Instructions on page 2)

DISTRICT 1 SUPERVISOR


JAN 13 2009

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

John R. Stearns DBA Stearns
Miller Federal # 007
API # 30-005-21012
1980 FSL X 330 FEL
Unit Letter I, Sec 35, T7S, R31E
Chaves County, NM
Current Well Diagram

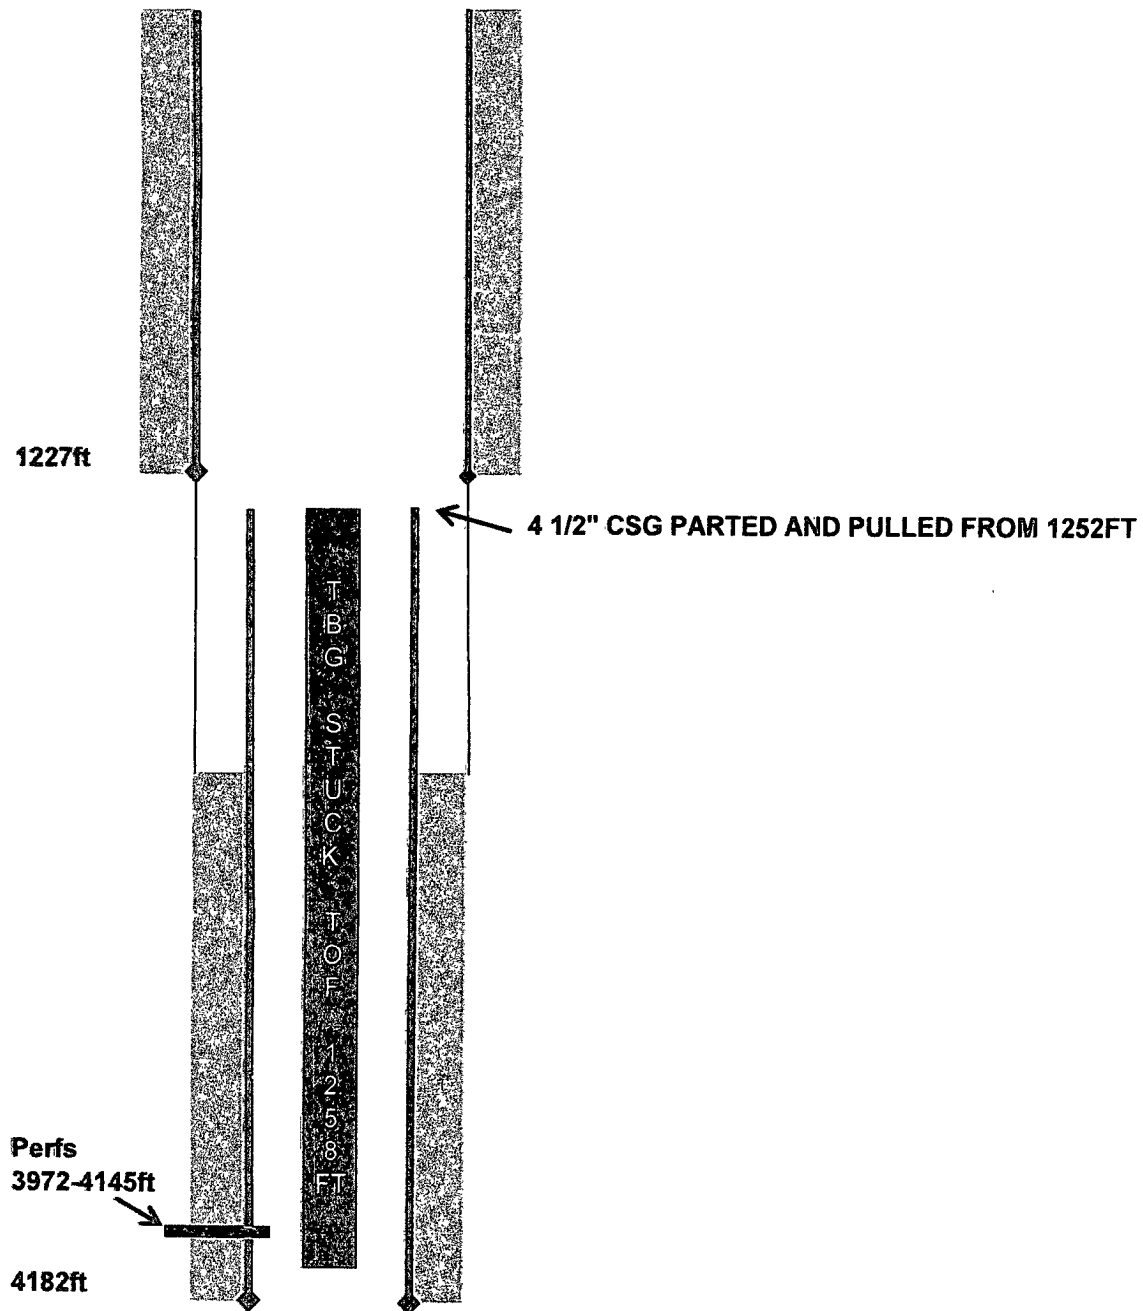

John R.Stearns DBA Stearns
Miller Federal # 007
API # 30-005-21012
1980 FSL X 330 FEL
Unit Letter I, Sec 35, T7S, R31E
Chaves County, NM
Plugged Well Diagram

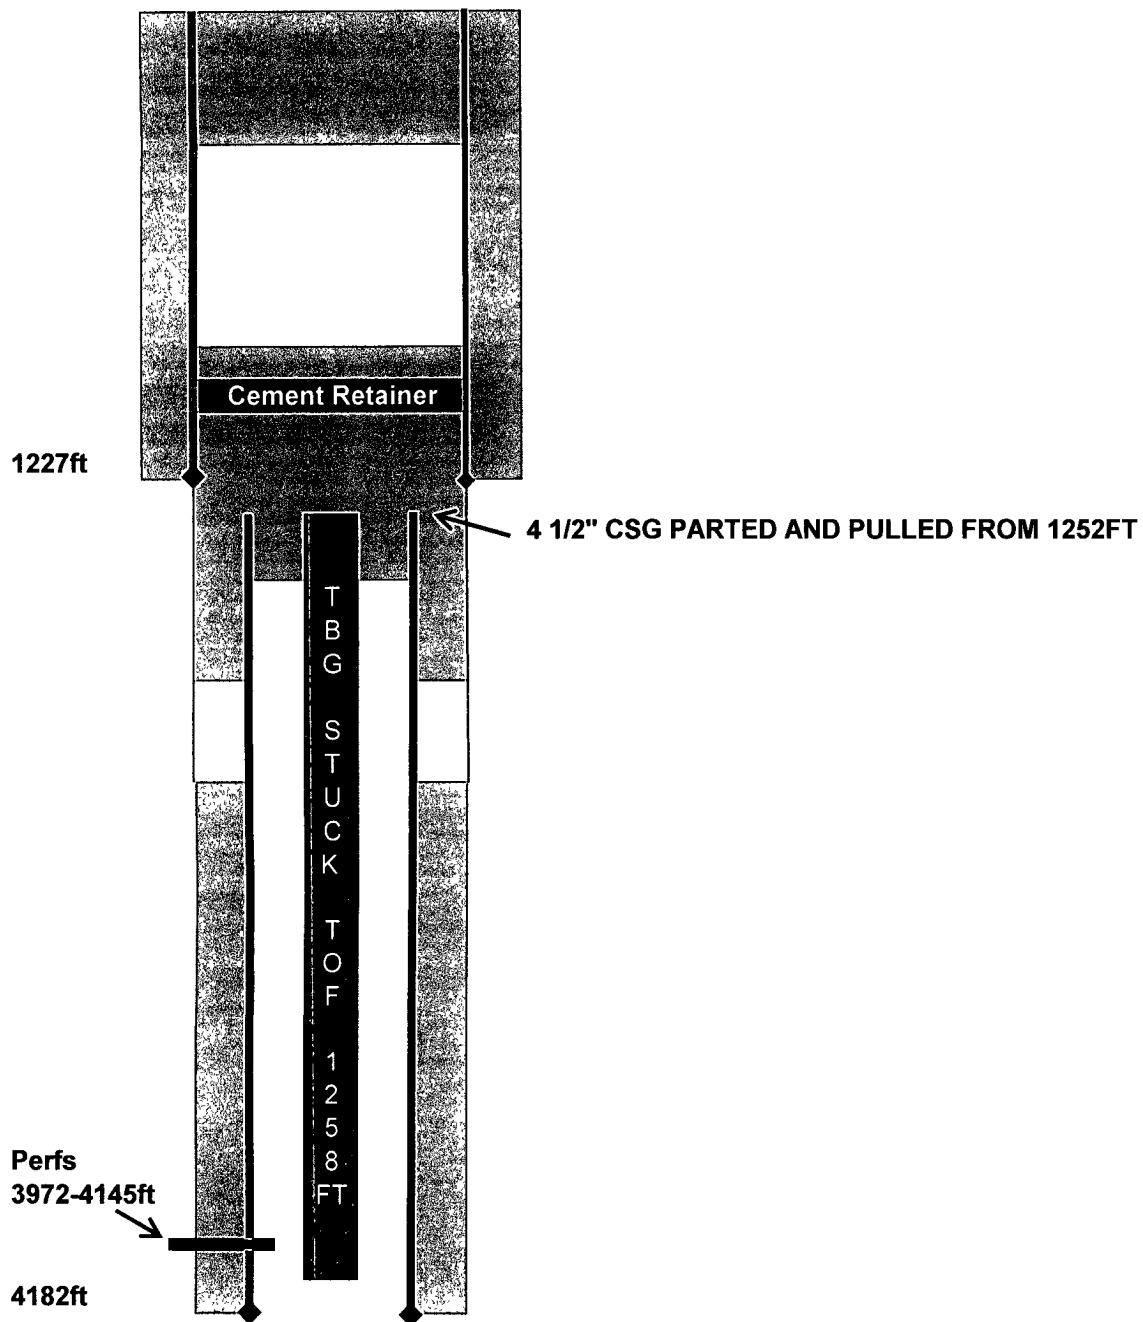

BUREAU OF LAND MANAGEMENT

**Roswell Field Office
2909 West Second Street
Roswell, New Mexico 88201
(575) 627-0272**

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Abandon. **If you are unable to plug the well by the 90th day provide the BLM Roswell Field Office, prior to the 90th day, with the reason for not meeting the deadline and a date when the BLM Roswell Field Office can expect the well to be plugged. Failure to do so will result in enforcement action.**

2. Notification: Contact the BLM Roswell Field Office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, during office hours call (575) 627-0205 or after office hours call (575) 910-6024. Engineer on call during office hours phone (575) 627-0275 or phone (after hours) call (575) 626-5749.

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9090 feet; a 3M system for a well not deeper than 13636 feet; and a 5M system for a well not deeper than 22727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at a rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 50 feet of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either class "C" for up to 7500 feet of depth, mixed at 14.8 lbs./gal with 6.3 gallons of fresh water per sack or class "H" for deeper than 7500 feet plugs, mixed at 16.4 lbs./gal with 4.3 gallons of fresh water per sack.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10 feet in length, 4 feet above the ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: Well name and number, the name of the operator, the lease serial number, the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer; such as metes and bounds).

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to the BLM Roswell Field Office. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

Following the submittal and approval of the Subsequent Report of Abandonment, a Notice of Intent for Final Abandonment with the proposed surface restoration procedure must be submitted for approval.