

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 87240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87412

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Minerals and Natural Resources

Form C-103

May 27, 2004

RECEIVED

JAN 28 2009

CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

HOBBSOCD

| |
|--|
| WELL API NO. 30-041-20327 |
| 5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input checked="" type="checkbox"/> |
| 6. State Oil & Gas Lease No. K3582 |
| 7. Lease Name or Unit Agreement Name: Todd Lower SA Unit |
| 8. Well Number 325 |
| 9. OGRID Number 16696 |
| 10. Pool name or Wildcat Todd Lower San Andres (Assoc) |

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other Injection ☐

2. Name of Operator

OXY USA Inc.

3. Address of Operator

P.O. Box 50250 Midland, TX 79710-0250

4. Well Location

Unit Letter E: 1830 feet from the north line and 660 feet from the west line

Section 32 Township 7S Range 36E NMPM County Roosevelt

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

4133'

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 1/27/09

E-mail address: david_stewart@oxy.com

Type or print name David Stewart

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Mailey Brown MAB TITLE _____ DATE 2/3/2009

Conditions of Approval, if any:

COMPLIANCE OFFICER

TLSAU #325 - 30-041-20327

TD-4308' Perfs-4267-4292'

8-5/8" 24# @ 282' w/ 175sx, 12-1/4" hole, TOC-Surf-Circ
5-1/2" 14# csg @ 4308' w/ 300sx, 7-7/8" hole, TOC-2403'-Calc

Circ Hole w/ 10# MLF and between plugs

1. RIH & Set CIBP @ 4217' M&P 25sx cmt
2. M&P 25sx cmt @ 3550-3450'
3. Cut & Pull 5-1/2" csg @ +/- 2375'
4. M&P 45sx cmt @ 2425-2300' WOC-Tag
5. M&P 45sx cmt @ 1600-1485' WOC-Tag
6. M&P 45sx cmt @ 1210-1095' WOC-Tag
7. M&P 125sx cmt @ 332'-Surface


OXY USA Inc. - Proposed
Todd Lower SA Unit #325
API No. 30-041-20327

125sx @ 332'-Surface



12-1/4" hole @ 282'
8-5/8" csg @ 282'
w/ 175sx-TOC-Surf-Circ


45sx @ 1210-1095' WOC-Tag



45sx @ 1600-1485' WOC-Tag



45sx @ 2425-2300' WOC-Tag

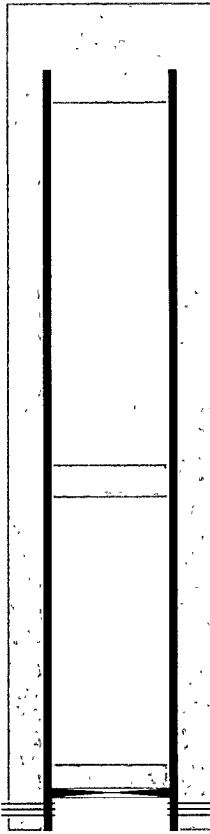

Cut & Pull 5-1/2" csg @ +/- 2375'

25sx @ 3550-3450'

7-7/8" hole @ 4308'
5-1/2" csg @ 4308'
w/ 300sx-TOC-2403'-Calc


CIBP @ 4217' w/ 25sx

Perfs @ 4267-4292'

TD-4308'

OXY USA Inc. - Current
Todd Lower SA Unit #325
API No. 30-041-20327

12-1/4" hole @ 282'
8-5/8" csg @ 282'
w/ 175sx-TOC-Surf-Circ

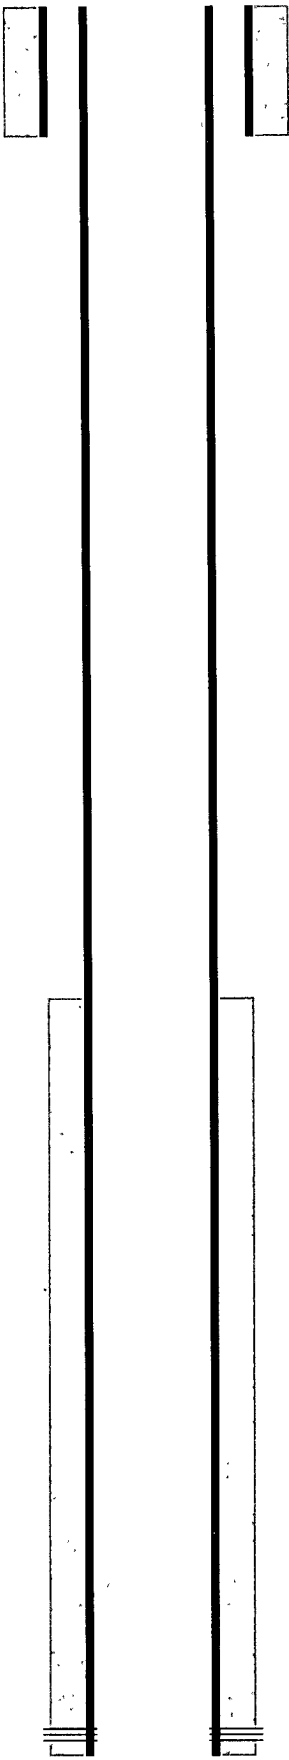

7-7/8" hole @ 4308'
5-1/2" csg @ 4308'
w/ 300sx-TOC-2403'-Calc

Perfs @ 4267-4292'

TD-4308'