District I 1625 N. French Dr., Hobbs, NM 8820 C WE Innergy Minerals and Natural Resources District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Road, Aztec, NM 87410

0.4 2009 1220 S. St. Francis Dr., Santa Fe, 1 10880CD

Alternative Method:

State of New Mexico Department Oil Conservation Division

1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or

Proposed Alternative Method Permit or Closure Plan Application			
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method			
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request			
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.			
1. Operator: Yates Petroleum Corporation OGRID #: 025575			
Address: 105 South Fourth Street, Artesia, NM 88210			
Facility or well name: Ninja BMN State Com #11			
API Number. 30-005-29083 OCD Permit Number: P1-00967			
U/L or Qtr/Qtr A Section 11 Township 15S Range 31E County Chaves			
Center of Proposed Design: Latitude N33.035042 Longitude W103.784364 NAD: ☐ 1927 ☑ 1983			
Surface Owner: Federal State Private Tribal Trust or Indian Allotment			
2. Pit: Subsection F or G of 19.15.17.11 NMAC			
Temporary: ⊠ Drilling □ Workover			
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A			
☐ Lined ☐ Unlined Liner type: Thickness <u>20</u> mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other			
String-Reinforced			
Liner Seams: Welded Factory Other Volume: 12,000 bbl Dimensions: L 140' x W 140' x D 6'			
3. Closed-loop System: Subsection H of 19 15 17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of			
intent)			
Drying Pad Above Ground Steel Tanks Haul-off Bins Other			
☐ Lined ☐ Unlined Liner type. Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other			
Liner Seams: Welded Factory Other			
4.			
Below-grade tank: Subsection I of 19 15.17.11 NMAC			
Volume:bbl Type of fluid:			
Tank Construction material:			
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off			
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other			
Liner type: Thicknessmil			

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify		
7.		
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	;	
☐ Screen ☐ Netting ☒ Other N/A (Temp Pit No Netting Required)		
Monthly inspections (If netting or screening is not physically feasible)		
 Signs: Subsection C of 19.15.17.11 NMAC □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☑ Signed in compliance with 19.15.3.103 NMAC 		
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.		
Siting Criteria (regarding permitting): 19.15.17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No	
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality	☐ Yes ☑ No	
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No	
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No	
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources, USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No	
Within a 100-year floodplain EFMA man See Attached Exhibit "A"	☐ Yes ☒ No	

11.
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC See Attached Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Exh "B" Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC See Attached Exhibit "C" Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Luiner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Rēmoval Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.		
Disposal Facility Name: D	isposal Facility Permit Number:	
	isposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No		
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC		
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.		
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data of	btained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS; Data of	btained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data of	btained from nearby wells	☐ Yes ☐ No☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signifiance (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	icant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in Visual inspection (certification) of the proposed site, Aerial photo; Satellite in		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less the watering purposes, or within 1000 horizontal feet of any other fresh water well or spring - NM Office of the State Engineer - iWATERS database; Visual inspection (cere	ng, in existence at the time of initial application	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water valopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval		☐ Yes ☐ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual i	nspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining at	d Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Society; Topographic map 	Mineral Resources, USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain FEMA map		Yes No
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC		

,		
Operator Application Certification: I hereby certify that the information submitted with this application is true, a	ccurate and complete to the best of my knowledge and belief.	
Name (Print). Cy Cowan	Title: Regulatory Agent	
Signature: (K)	Date: 10/21/08	
e-mail address:cy@ypcnm com	Telephone: <u>575-748-4372</u>	
OCD Approval: Permit Application (including closure plan) Closu	re Plan (only) OCD Conditions (see attachment)	
OCD Representative Signature:	OCD Permit Number: P\ - 00967	
Title: Géologist	OCD Permit Number: P1-00967	
Closure Report (required within 60 days of closure completion): Subsectinstructions: Operators are required to obtain an approved closure plan properties to the division within 60 days section of the form until an approved closure plan has been obtained and the	ior to implementing any closure activities and submitting the closure report. of the completion of the closure activities. Please do not complete this	
	Closure Completion Date:	
Closure Method: Waste Excavation and Removal On-Site Closure Method Alt If different from approved plan, please explain.	ternative Closure Method Waste Removal (Closed-loop systems only)	
23. Closure Report Regarding Waste Removal Closure For Closed-loop Syst Instructions: Please indentify the facility or facilities for where the liquids, two facilities were utilized.	ems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: drilling fluids and drill cuttings were disposed. Use attachment if more than	
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:		
Were the closed-loop system operations and associated activities performed o Yes (If yes, please demonstrate compliance to the items below)	n or in areas that will not be used for future service and operations?	
Required for impacted areas which will not be used for future service and open Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	erations·	
Closure Report Attachment Checklist: Instructions: Each of the followin mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)	g items must be attached to the closure report. Please indicate, by a check	
Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closu Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	re)	
On-site Closure Location: LatitudeLoi	ngitude NAD:	
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.		
Name (Print)	Title:	
Signature:	Date:	
e-mail address:	Telephone:	

Ninja BMN State Com #1H Township 15 S, Range 31 E, Section 11 Chaves County, New Mexico

New Mexico Office of the State Engineer POD Reports and Downloads

TOD Kepo	its and Downloads
Township: 158 Range: 31E	Sections: 11

POD / SURFACE DATA REPORT

05/22/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

(acre ft per annum)

UTM are in (quarters are biggest to smallest X Y are in Feet Start Finish Depth Depth (in feet) Meters) Use Diversion Owner DB File Nbr POD Source Tws Rng Sec qqq Zone X Number UTM Zone Easting Northing Date Date Well Water DOM 3 JESSIE W. STEVENS L 06307 Shallow 15S 31E 11 3 4 2 06307 612686 3654805 05/23/1968 06/08/1968 297 264

Record Count: 1


AVERAGE DEPTH OF WATER REPORT 05/22/2008

 Bsn
 Tws
 Rng
 Sec
 Zone
 X
 Y
 Wells
 Min
 Max
 Avg

 L
 15S
 31E
 11
 1
 264
 264
 264

Record Count: 1


Ninja BMN State Com #1H 990' FNL and 200' FEL Section 11, T15S-R31E Chaves County, New Mexico Exhibit "B"

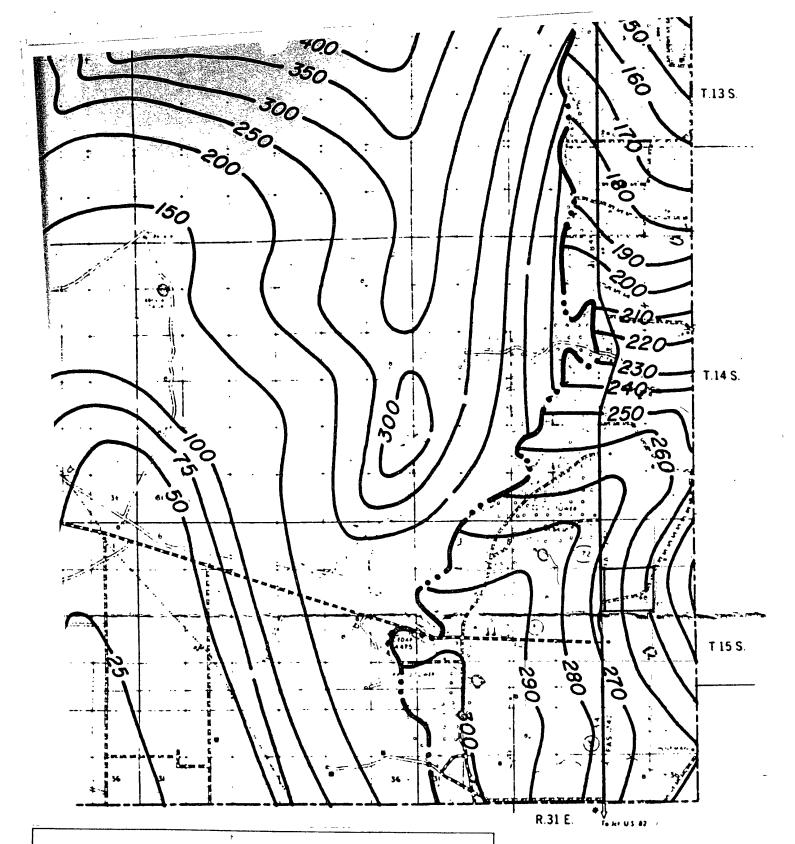

ChevronTexaco

Chaves Co. Depth To Ground Water Water Wells Facilities

Ninja BMN State Com #1H 990' FNL and 200' FEL Section 11, T15S-R31E Chaves County, New Mexico Exhibit "B-1"

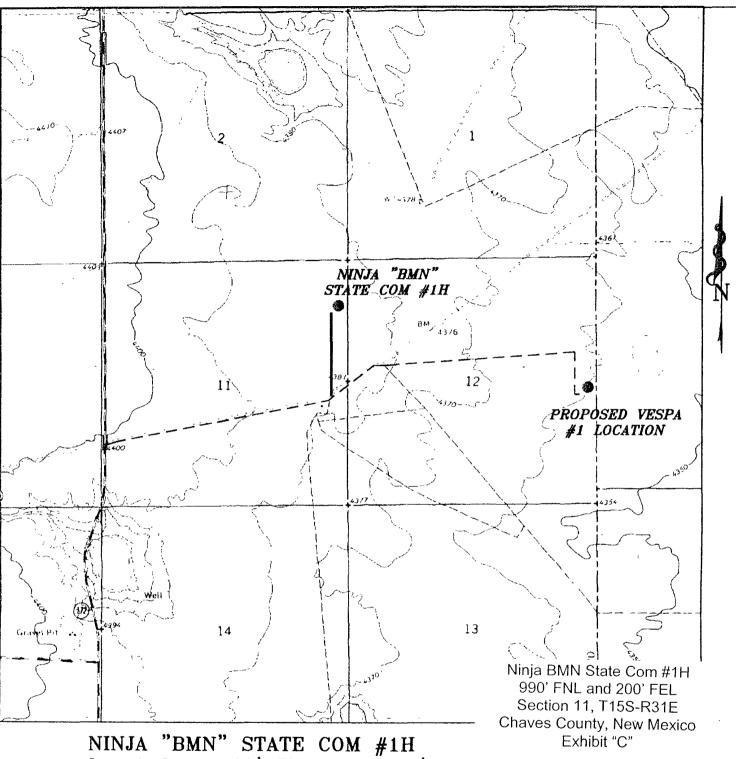

NINJA "BMN" STATE COM #1H

Located at 990' FNL AND 200' FEL

Section 11, Township 15 South, Range 31 East,
N.M.P.M., Chaves County, New Mexico.



P.O. Box 1786 1120 N. West County Rd. Hobbs, New Mexico 88241 (505) 393-7316 - Office (505) 392-3074 - Fax basinsurveys.com W.O. Number: 19824

Survey Date: 07-08-2008


Scale: 1" = 2000'

Date: 07-09-2008

YATES PETROLEUM CORP.



Ninja BMN State Com #1H 990' FNL and 200' FEL Section 11, T15S-R31E Chaves County, New Mexico Exhibit "C-1"

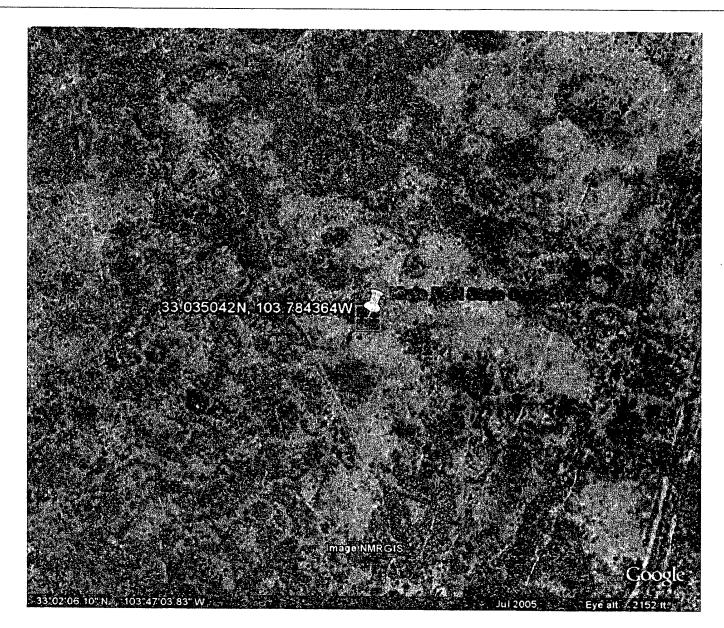

Yates Petroleum Corporation Design Requirements For Temporary Reserve Pit

Sign posted on site / location or on the fence of reserve pit identifying the operator, listing their phone #, location of site by $\frac{1}{4}$ / $\frac{1}{4}$ or unit letter, and S- T- R.

Pit must be fenced to prevent unauthorized access. Fence must remain in good repair. Fence to be barbed wire, space at 1 foot intervals from 1' to 4' off ground.

Slope of the pit walls is no greater than two vertical feet to one horizontal foot.

Welded liner seams must run up & down the banks of the pit, not horizontally across them.

Field seams must be welded.

Edges of the liner must be anchored in trenches at least 18 inches deep. Edge of liner will protrude from the outside edge of the trench.

Pit shall be designed to prevent to run on of surface water.

Yates Petroleum Corporation Drilling Operations Requirements For Temporary Reserve Pit.

While the drilling rig is onsite, Operator's representative will inspect the temporary pit daily to ensure that the liner is intact, and that no releases are occurring. Thereafter, the operator shall inspect at least once weekly as long as liquids remain in the

Operator will maintain a log of such inspections and make the log available to the appropriate NMOCD District office upon request.

A copy of the inspection log shall be filed with the NMOCD when operator closes the pit.

Operator must notify NMOCD if liner is damaged, and must repair or replace the damaged liner. Operator has 48 hours to notify NMOCD and make repairs.

NO HOLES in pit liners - not even in the part of the liner that is not in the reserve pit.

All drilling fluids to be removed from temporary pit within 30 days of rig release date

Hydrocarbon based drilling fluids will be stored in steel pits.

temporary pit.

Liner -will be 20mil., string reinforced with welded seams.

Fluids to be added to pit through a header, diverter, or other hardware that prevents damage to liner by erosion, fluid jets, or impacts from installations and removal of hoses or pipes.

Operator shall have onsite an oil absorbent boom or other device to contain and remove oil from a pits surface.

Operator must maintain a freeboard of at least two feet for a temporary pit.

Pit will be bermed to prevent run on of water into the pit.

Closure Procedure For Temporary Drilling Pits

- 1. De-water pit within 30 days of rig release.
- 2. Weekly inspection of fluid level in drilling pit after rig release date until fluids are removed. Weekly levels will be recorded in a log to be submitted to the appropriate OCD district office at time of pit closure.
- 3. All removed pit fluids will be disposed of in an OCD approved manner at one of the listed OCD approved disposal facilities.

Disposal Facility: Gandy Marley

Disposal Facility Permit Number: NM-01-0019

- 4. If fluids are reclaimed the appropriate OCD district office will be contacted beforehand for approval to do so.
- 5. Within 6 months of the rig release date and after the removal of all free liquids from the temporary drilling pit, the surface owner will be notified by certified mail, return receipt requested that the operator will close the pit. OCD division office will be notified verbally that waste excavation and removal will begin.
- 6. All impacted contents of the temporary drilling pit will be stabilized by mixing of dry non-waste containing earthen material so that such material will pass a paint filter test.
- 7. All stabilized pit contents, including the synthetic pit liner will be loaded into trucks and transferred to the division-approved facility listed below for proper disposal.

Disposal Facility: Gandy Marley

Disposal Facility Permit Number: NM-01-0019

8. Once all visually impacted materials have been removed from the temporary drilling pit, testing and analyzing of the soils beneath the pit will be conducted in accordance with 19.15.17.13, B., 1(b) (i) or (ii) whichever is appropriate to determine if a release has occurred during utilization of the pit.

- 9. When analysis indicates that the soils within the pit area are within the recommended actions levels backfilling will begin.
- 10. Backfill material will consist of non-waste containing earthen material. The cleaned out drilling pit will be filled with such material to a level which shall allow space for the addition of topsoil which will be equal to the thickness of the background topsoil or one foot whichever is greater as directed in 19.15.17.13, H (1) NMAC.
- 11. The topsoil cover will be placed on to the drilling pit area in a manner of existing grade and will prevent ponding of water and erosion of the cover material.
- 12. Within 60 days of closure completion a closure report on form C-144 will be submitted to the appropriate district office. The report will contain detailed information on the backfilling, capping. The closure report will also include a plat of the closed pit location on a form C-105.
- 13. Within the first growing season after the approved pit closure seeding of the pit area shall occur. The seeding will be performed in accordance with 19.15.17.13, I, (2) (3) (4) (5).