

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 88040
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

RECEIVED

OCT 30 2009

HOBBSDOCD

OIL CONSERVATION DIVISION
220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-25597
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B-229
7. Lease Name or Unit Agreement Name: Arnett Ramsey NCT E
8. Well Number 9
9. OGRID Number 16696
10. Pool name or Wildcat Jalmat Tan-Yates-7Rvr (Oil)

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/>	7. Lease Name or Unit Agreement Name: Arnett Ramsey NCT E
2. Name of Operator OXY USA Inc.	8. Well Number 9
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	9. OGRID Number 16696
4. Well Location Unit Letter J : 1980 feet from the south line and 1980 feet from the east line. Section 16 Township 25S Range 37E NMPM County Lea	10. Pool name or Wildcat Jalmat Tan-Yates-7Rvr (Oil)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3101' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>	
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-3700' PBDT-2872' Perfs-2920-3028' CIBP-2872'
8-5/8" 24# csg @ 350' w/ 250sx, 12-1/4" hole, TOC-Surf-Circ
4-1/2" 11.6# csg @ 3700' w/ 1035sx, 7-7/8" hole, TOC-Surf-Circ
1. RIH & Tag CIBP @ 2872', M&P 30sx cmt to 2600'
2. M&P 30sx cmt @ 1225-1015'
3. M&P 25sx cmt @ 400-300' WOC-Tag
4. M&P 10sx cmt to Surface
10# MLF between plugs

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 10/29/09
E-mail address: david_stewart@oxy.com
Type or print name David Stewart Telephone No. 432-685-5717

For State Use Only

APPROVED BY Mark Whitman TITLE Compliance Officer DATE 11-03-2009
Conditions of Approval, if any:

OXY USA Inc. - Proposed
Arnett Ramsey NCT E #9
API No. 30-025-25597

10sx @ Surface


25sx @ 400-300' WOC-Tag

30sx @ 1225-1015'

30sx @ 2872-2600'

9/09-CIBP @ 2872'

7/82-CIBP @ 3350' w/ 35' cmt

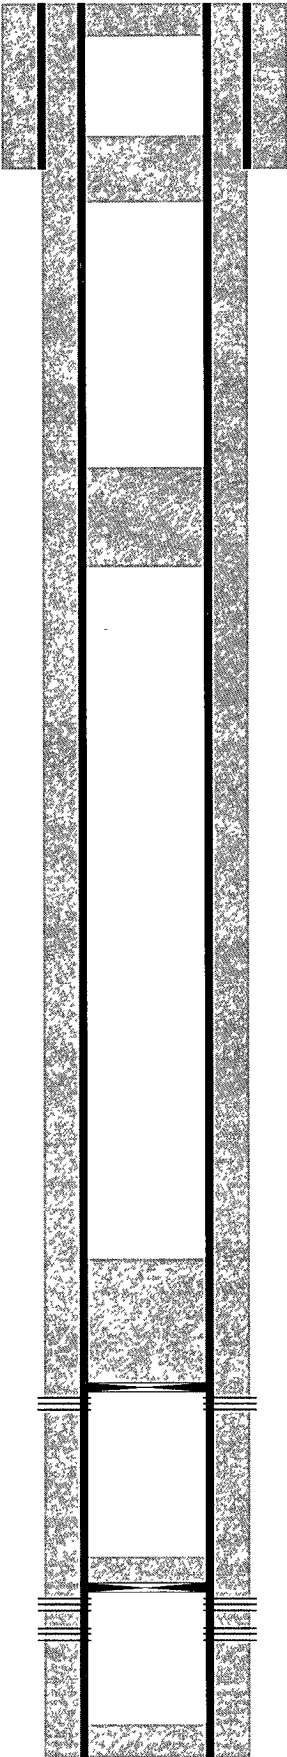

TD-3700'

12-1/4" hole @ 350'
8-5/8" csg @ 350'
w/ 250sx-TOC-Surf-Circ

Perfs @ 2920-3028'

7-7/8" hole @ 3700'
4-1/2" csg @ 3700'
w/ 1035sx-TOC-Surf-Circ

Perfs @ 3402-3538'

OXY USA Inc. - Current
Arnott Ramsey NCT E #9
API No. 30-025-25597

12-1/4" hole @ 350'
8-5/8" csg @ 350'
w/ 250sx-TOC-Surf-Circ

9/09-CIBP @ 2872'

Perfs @ 2920-3028'

7/82-CIBP @ 3350' w/ 35' cmt

7-7/8" hole @ 3700'
4-1/2" csg @ 3700'
w/ 1035sx-TOC-Surf-Circ

Perfs @ 3402-3538'

TD-3700'