

Submit 3 Copies To Appropriate District

Office

District I

1625 N French Dr, Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103

March 4, 2004

RECEIVED

NOV 20 2009

HOBOCOO

OIL CONSERVATION DIVISION

220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-06836

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

J.N. Carson NCT-C

8. Well Number

9

9. OGRID Number

4323

10. Pool name or Wildcat

Blineberry Oil & Gas

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Chevron USA, Inc.

3. Address of Operator

#15 Smith Rd., Midland, TX 79705

4. Well Location

Unit Letter I: 2086 feet from the South line and 766 feet from the East line

Section 28

Township 21-S Range 37-E

NMPM LEA

County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL I Sect 28 Twp 21S Rng 37E Pit type _____ Depth to Groundwater 68' Distance from nearest fresh water well _____

Distance from nearest surface water _____ Below-grade Tank Location UL _____ Sect _____ Twp _____ Rng _____;

2086 feet from the South line and 766 feet from the East line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☒

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hrs. prior to MI and RU.

2. RIH set CIBP at 3600'.

3. Displace hole w/MLF, 9.5# Brine w/12.5# gel P/BBL.

4. Spot 35sx cement plug from 3600'-3400'.

5. Spot 35sx cement plug from 2900'-2700' (shoe/old squeezed perfs) WOC & TAG

6. Perf and squeeze 125sx cement plug from 2700'-2300' (Yates/B. Salt). WOC & TAG

7. Perf and squeeze 90sx cement plug from 1450'-1150' (old squeezed perfs/T. Salt). WOC & TAG.

8. Perf and squeeze 255sx cement plug from 400'-surface' (old squeezed perfs/shoe/WB/surface)(7"x9 5/8"x12 1/4"x13 3/8"). WOC & TAG.

9. Install dry hole marker and clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE

M. Lee Roark

TITLE Agent for Chevron USA, Inc.

DATE 11-19-2009

Type or print name

M. Lee Roark

E-mail address:

Telephone No. 432-561-8600

(This space for State use)

APPROVED BY

Mary Brown

TITLE

Compliance Officer

DATE

11/30/2009

Conditions of approval, if any:

The Oil Conservation Division **Must be notified 24 hours prior** to the beginning of plugging operations

Well J. N. Carson (NCT-C) # 9

Field Blinebry

Reservoir Blinebry

LAT 32.44812, LONG - 103.16155

Proposed
Wellbore Diagram

Location
2086' FSL & 766' FEL
Section 28
Township 21S
Range 37E Unit 1
County Lea State NM

Elevations:
GL 3424'
KB 3435'
DF 3435'

Well ID Info

Chevno FA7933
API No 30-025-06836
L5/L6 U460900
Spud Date 10/8/50
Compl Date 11/23/50

Surf Csg: 13 3/8" 48#, H-40
Set: @ 293' w/300 sx cmt
Hole Size 17 1/4"
Circ: Yes TOC: Surface
TOC By: Circulated

Blk Sqz Perfs @ 350'

Blk Sqz Perfs @ 1400'

Intern Csg: 9 5/8" 36#, J55
Set: @ 2800' w/ 1300 sx cmt
Hole Size: 12 1/4"
Circ: No TOC: 790'
TOC By: Temperature Survey

Blk Sqz Perfs @ 2800'
(CN pump in with 2000 psi)

(Base of Salt @ 2410')

Tubing Detail

#Jts.	Size	Footage
	KB Correction	14.00
121	Jts 2 7/8" J-5	3751.00
	2 7/8" x 6 T6	6
	Drain Valve	0.55
	2 7/8" x 2 3/8"	0.60
	Centrifl Sub	35.41
121	Bottom Of Mtr	3897.66

Perfs	Status
3642-44'	Grayburg - Open
3659-61'	Grayburg - Open
3669-71'	Grayburg - Open
3681-83'	Grayburg - Open
3689-91'	Grayburg - Open
3699-3701'	Grayburg - Open
3737-39'	Grayburg - Squeezed off
3766-68'	Grayburg - Squeezed off

CIBP @ 3995'
(35' cmt on top)

CIBP & Setting Tool @ 4480'

CIBP @ 4895'
(2 sx cmt on top)

4055-64'	San Andres - Open
4238-45'	San Andres - Open
4285-92'	San Andres - Open
4357-64'	San Andres - Open
4435-45'	San Andres - Open
4555-65'	San Andres - Open
4726-34'	San Andres - Open
4785-95'	San Andres - Open

5111-5118'	Paddock perfs
5129-5139'	
5165-5169'	


CIBP @ 7300'
(2 sx cmt on top)

Prod. Csg. 7", 23#, J-55, N-80
Set. @ 7487' w/ 700 sx cmt
Hole Size: 8 3/4"
Circ: No TOC: 2700'
TOC By: Temperature Survey

PBTD. 7453'
TD: 7488'

7415-7435' Hare Field perfs

Updated: 7/21/05

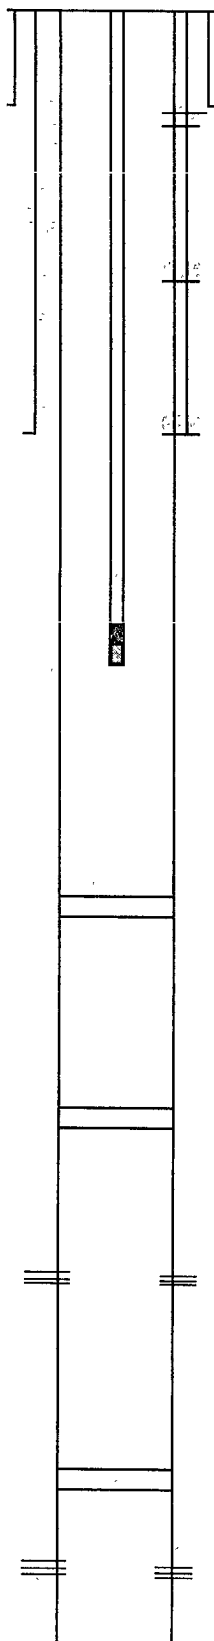



New Mexico Office of the State Engineer

Water Column/Average Depth to Water

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest) (NAD83 UTM in meters) (In feet)

POD Number	Sub basin	Use	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Depth Well	Depth Water	Water Column
CP 00242	IND	LE		3	4	2	28	21S	37E	672708	3591889*	112		
CP 00322	DOM	LE				3	28	21S	37E	671818	3591366*	138	73	65
CP 00711	DOM	LE		4	2	28	21S	37E	672809	3591990*	100	65		35
CP 00735	DOM	LE		2	4	28	21S	37E	672816	3591588*	105			
CP 00749	DOM	LE		2	4	3	28	21S	37E	672118	3591271*	123	75	48
CP 00965 POD1	DOM	LE		1	3	4	28	21S	37E	672333	3591346	123	60	63
CP 00965 POD2	DOM	LE		1	3	4	28	21S	37E	672273	3591336	135		
CP 00966 POD1	DOM	LE		1	3	4	28	21S	37E	672320	3591278*	154		

Average Depth to Water: **68 feet**

Minimum Depth: **60 feet**

Maximum Depth: **75 feet**

Record Count: 8

PLSS Search:

Section(s): 28

Township: 21S

Range: 37E

*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.