

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88201
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

RECEIVED MAY 23 2009 HOBBS, NM		WELL API NO. 30-025-21046 ✓
		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> ✓
		6. State Oil & Gas Lease No. S-91017
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		7. Lease Name or Unit Agreement Name: New Mexico E State ✓
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		8. Well Number 3 ✓
2. Name of Operator OXY USA Inc. ✓		9. OGRID Number 16696 ✓
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		10. Pool name or Wildcat Mescalero San Andres ✓
4. Well Location Unit Letter <u>C</u> : <u>660</u> feet from the <u>north</u> line and <u>1650</u> feet from the <u>west</u> line Section <u>26</u> Township <u>10S</u> Range <u>32E</u> NMPM County <u>Lea</u>		
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4312' GR		
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4260' PBD-4247' Perfs-4124-4224'
8-5/8" 24# csg @ 1550' w/400sx, 12-1/4" hole, TOC-Surf-Circ
4-1/2" 9.5# csg @ 4260' w/ 400sx, 7-7/8" hole, TOC-2760'-TS
1. RIH & Set CIBP @ 4075', M&P 25sx cmt
2. M&P 25sx cmt @ 3100-2970'
3. Perf @ 2285' sqz 55sx cmt to 2160' WOC-Tag
4. Perf @ 1600' sqz 55sx cmt to 1485' WOC-Tag
5. Perf @ 200' sqz 75sx cmt to Surface
10# MLF between plugs

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 12/22/09

E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

Type or print name David Stewart

For State Use Only

APPROVED BY [Signature] TITLE PETROLEUM ENGINEER DATE JAN 04 2010

Conditions of Approval, if any:

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

OXY USA Inc. - Proposed
New Mexico E State #3
API No. 30-025-21046

75sx @ 200'-Surface


55sx @ 1600-1485' WOC-Tag

55sx @ 2285-2160' WOC-Tag

25sx @ 3100-2970'

CIBP @ 4075' w/ 25sx

PB-4247'

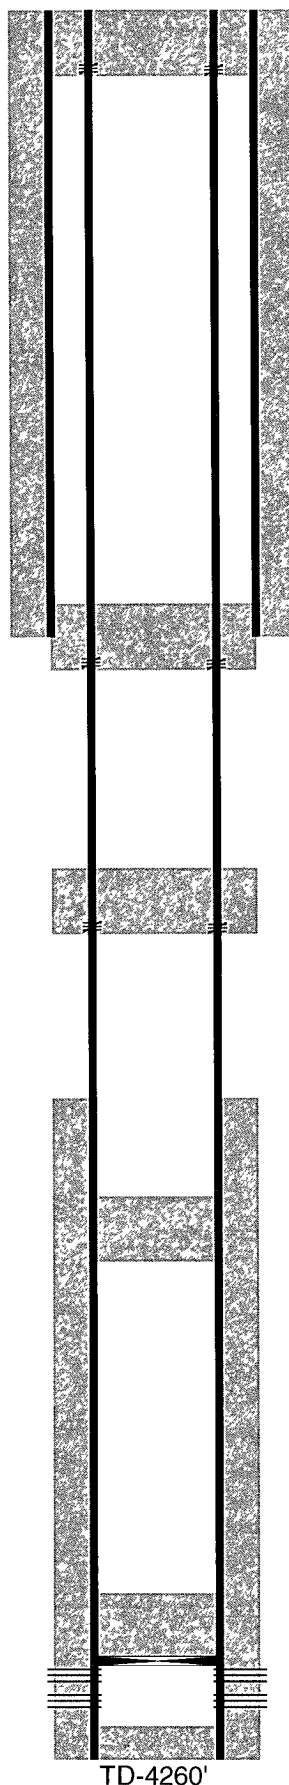

Perf @ 200'

Perf @ 1600'

Perf @ 2285'

Perfs @ 4124-4224'

12-1/4" hole @ 1550'
8-5/8" csg @ 1550'
w/ 400sx-TOC-Surf-Circ

OK KATHY MATE KZ


OK PERC HALL KZ

7-7/8" hole @ 4260'
4-1/2" csg @ 4260'
w/ 400sx-TOC-2760'-TS

TD-4260'

OXY USA Inc.
New Mexico E State #3
API No. 30-025-21046

12-1/4" hole @ 1550'
8-5/8" csg @ 1550'
w/ 400sx-TOC-Surf-Circ

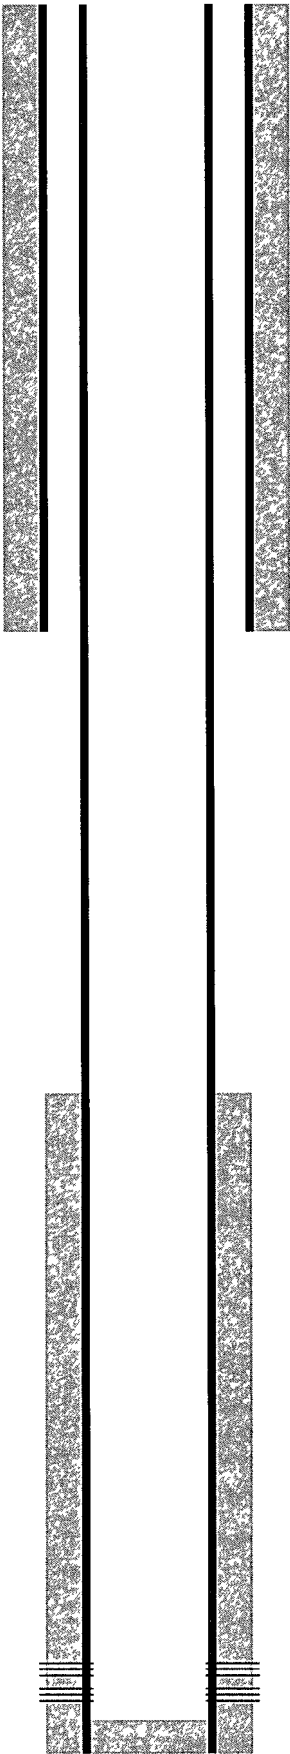

7-7/8" hole @ 4260'
4-1/2" csg @ 4260'
w/ 400sx-TOC-2760'-TS

Perfs @ 4124-4224'

PB-4247'

TD-4260'