

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87419  
District II  
1301 W. Grand Ave., Artesia, NM 88211  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

RECEIVED

DEC 23 2009

HOBBSOCD

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-21099
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. S-91017
7. Lease Name or Unit Agreement Name: New Mexico E State
8. Well Number 4
9. OGRID Number 16696
10. Pool name or Wildcat Mescalero San Andres

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	4. Well Location Unit Letter <u>F</u> : <u>1650</u> feet from the <u>north</u> line and <u>1650</u> feet from the <u>west</u> line Section <u>26</u> Township <u>10S</u> Range <u>32E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4311' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4450' PBD-4426' Perfs-4159-4279'  
8-5/8" 24# csg @ 1550' w/400sx, 12-1/4" hole, TOC-Surf-Circ  
4-1/2" 9.5# csg @ 4450' w/ 450sx, 7-7/8" hole, TOC-2842'-TS  
1. RIH & Set CIBP @ 4110', M&P 25sx cmt  
2. M&P 25sx cmt @ 3120-2990'  
3. Perf @ 2300' sqz 55sx cmt to 2175' WOC-Tag  
4. Perf @ 1600' sqz 55sx cmt to 1485' WOC-Tag  
5. Perf @ 200' sqz 75sx cmt to Surface  
10# MLF between plugs

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 12/22/09  
E-mail address: david\_stewart@oxy.com Telephone No. 432-685-5717  
Type or print name David Stewart

For State Use Only

APPROVED BY [Signature] TITLE \_\_\_\_\_ DATE JAN 04 2010  
Conditions of Approval, if any: \_\_\_\_\_

PETROLEUM ENGINEER

THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO THE  
BEGINNING OF PLUGGING OPERATIONS

OXY USA Inc. - Proposed  
New Mexico E State #4  
API No. 30-025-21099

75sx @ 200'-Surface


55sx @ 1600-1458' WOC-Tag

55sx @ 2300-2175' WOC-Tag

25sx @ 3120-2990'

CIBP @ 4110' w/ 25sx

PB-4426'

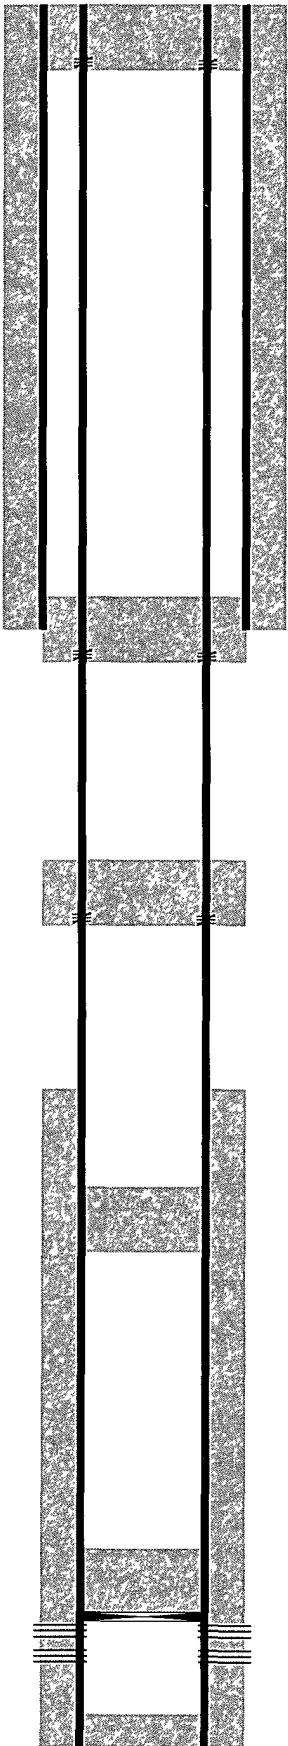

Perf @ 200'

Perf @ 1600'

Perf @ 2300'

Perfs @ 4159-4279'

12-1/4" hole @ 1550'  
8-5/8" csg @ 1550'  
w/ 400sx-TOC-Surf-Circ

ANHYMITE KZ



ANHYMITE KZ

7-7/8" hole @ 4450'  
4-1/2" csg @ 4450'  
w/ 450sx-TOC-2842'-TS

TD-4450'

OXY USA Inc.  
New Mexico E State #4  
API No. 30-025-21099

12-1/4" hole @ 1550'  
8-5/8" csg @ 1550'  
w/ 400sx-TOC-Surf-Circ

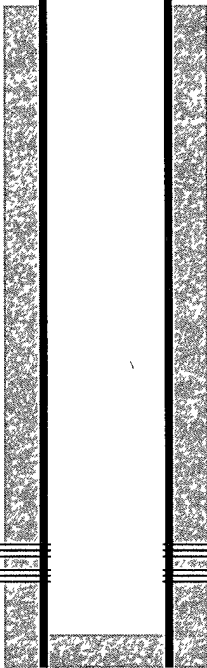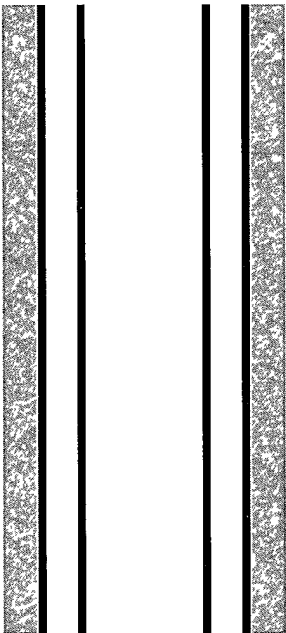

7-7/8" hole @ 4450'  
4-1/2" csg @ 4450'  
w/ 450sx-TOC-2842'-TS

Perfs @ 4159-4279'

PB-4426'

TD-4450'