

Submit 3 Copies To Appropriate District Office
District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd, Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 3D-025-01133
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-9560
7. Lease Name or Unit Agreement Name N.M. "BG" NCT-2
8. Well number 1
9. OGRID Number 213190
10. Pool name or Wildcat Saunders Permo Penn

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator Crown Quest Operating L.L.C.	
3. Address of Operator 303 Veterans Airpark Ste. 5100 Midland. TX 79707	
4. Well Location Unit Letter A : 990 feet from the North line and 988 feet from the East line Section 16 Township 14-S Range 33-E NMPM County Lea	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4242' GR	
Pit or Below-grade Tank Application ☒ or Closure ☐	
Pit type STEEL Depth to Groundwater Distance from nearest fresh water well Distance from nearest surface water N/A	
Pit Liner Thickness: STEEL mil Below-Grade Tank: Volume bbls; Construction Material STEEL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Set CIBP @ 9560' Cap with 30sxs cmt **9300'**
Spot 25sxs cmt @ 7765' - TO - **7565'**
Spot 25sxs cmt @ 6980' - TO - **6880'**
Spot 25sxs cmt @ 5555' - TO - **5455'**
Spot 60sxs cmt @ 4200' WOC tag **3960'**
Spot 30sxs cmt @ 3800' - TO **3700'**
Spot 30sxs cmt @ 3200' - **2800'**
Spot 40sxs cmt @ 2635' - **2500'**
Spot 45sxs cmt @ 1690' - **1500'**
Perf @ 426' Sqz 100sxs cmt @ 426'-300' WOC tag
Perf @ 60s Sqz 40sxs cmt from 60' to surface

RECEIVED
FEB 19 2010
HOBBSOCD


CALL BUDDY HILL IF TST.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE *Randall Minear* TITLE P&A SIUPV. DATE 2/18/10
Type or print name RANDALL MINEAR
For State Use Only
APPROVED BY: *Buddy Hill* TITLE DISTRICT 1 SUPERVISOR DATE FEB 19 2010
Conditions of Approval (if any):

Before

Date Spudded: 12/14/62
4242' KBE

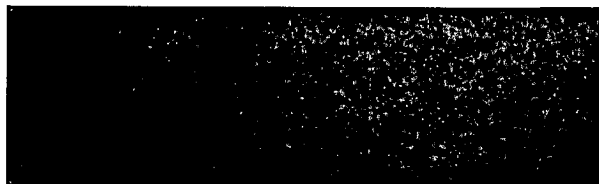

15" Hole →

10-3/4", 32.75# H-40 @ 377'.
Cmt w/450 sx, circ to surf.

TOC @ 376'

9-7/8" Hole →

7-5/8", 26.40# H-40 casing @ 4141'.
Cmt'd w/800 sx. TOC @ 376'

Liner Top @ 4032'

6-1/4" Hole →

Bough Perfs :

9655', 9675', 9689', 9747', 9782', 9786', 9814',
9821', 9826'-9850', 9867', 9875'-9880', 9890'-
9894', 9902'-9908', 9936'-9944', 9956', 9968'

4-1/2", 11.6# N-80 liner (top @ 4032') set
@ 10,100'. Cmt w/200 sx. Squeezed
liner top w/200 sx.

TD: 10,100'

PBTD: 9996'

Drawn by: DLR, 2/10

AFTER

60' PERF.
982' 40 SAKS
426' TO 300'

Date Spudded: 12/14/62
4242' KBE



15" Hole →

10-3/4", 32.75# H-40 @ 377'.
Cmt w/450 sx, circ to surf.

9-7/8" Hole →

7-5/8", 26.40# H-40 casing @ 4141'.
Cmt'd w/800 sx. TOC @ 376'

6-1/4" Hole →

TOC @ 376'

100 SAKS cnt TAG
PERF 982 426' TO 300'
1690 TO 1500 45 SAKS cnt
2635 TO 2500 40 SAKS cnt
3200 TO 2800 30 SAKS cnt
3800 TO 3700

Liner Top @ 4032'

4200 TO 3960 TAG ⁶⁰ SAKS cnt
5555 TO 5455 25 SAKS cnt
6980 TO 6880 25 SAKS cnt
7765 TO 7565 25 SAKS cnt
9560 TO 9300
C.I.B.P. 9560 30 SAKS cnt

Bough Perfs :

9655', 9675', 9689', 9747', 9782', 9786', 9814',
9821', 9826'-9850', 9867', 9875'-9880', 9890'-
9894', 9902'-9908', 9936'-9944', 9956', 9968'

4-1/2", 11.6# N-80 liner (top @ 4032') set
@ 10,100'. Cmt w/200 sx. Squeezed
liner top w/200 sx.

TD: 10,100'

PBTD: 9996'