

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

RECEIVED
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
MAR 08 2010
HOBBSOCD

WELL API NO. 30-025-00024 ✓
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> ✓
6. State Oil & Gas Lease No. S-9943
7. Lease Name or Unit Agreement Name: State AD ✓
8. Well Number 2 ✓
9. OGRID Number 16696 ✓
10. Pool name or Wildcat Mescalero San Andres ✓

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SWD Injection	7. Lease Name or Unit Agreement Name: State AD ✓
2. Name of Operator OXY USA Inc. ✓	8. Well Number 2 ✓
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	9. OGRID Number 16696 ✓
4. Well Location Unit Letter I : 3300 1980 feet from the south line and 660 feet from the east line Section 22 Township 10S Range 32E NMPM County Lea ✓	10. Pool name or Wildcat Mescalero San Andres ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4341'	

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 3/4/10

Type or print name David Stewart E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE Staff MGR DATE 3-10-10

Conditions of Approval, if any:

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

TD-10491' PBD-4271' Perfs-4088-4200' CIBP-4306'

13-3/8" 48# csg @ 392' w/ 400sx, 17-1/2" hole, TOC-Surf-Circ

8-5/8" 24-32# csg @ 3540' w/ 2000sx, 11" hole, TOC-Surf-Circ

5-1/2" 15.5-17# csg @ 8630' w/900sx, DVT @ 5980', 7-7/8" hole, *TOC-5320'-TS

*4/62-Perf @ 5320' & 5010', sqz 800sx, TOC-3155'-TS

1. RIH & Set CIBP @ 4038', M&P 25sx cmt —
 2. M&P 35sx @ 3590-3370' WOC-Tag
 3. Perf @ 2300', sqz 45sx cmt to 2175' WOC-Tag
 4. Perf @ 1600', sqz 45sx cmt to 1485' WOC-Tag
 5. Perf @ 442', sqz 35sx cmt to 342' WOC-Tag
 6. Perf @ 100', sqz 35sx cmt to Surface
- 10# MLF between plugs

OXY USA Inc. - Proposed
State AD #2
API No. 30-025-00024

35sx @ 100'-Surface

35sx @ 442'-342' WOC-Tag

45sx @ 1600-1485' WOC-Tag

45sx @ 2300-2175' WOC-Tag

35sx @ 3590-3370' WOC-Tag


CIBP @ 4038' w/ 25sx

5/62-CIBP @ 4306' w/ 5sx

5/62-CIBP @ 8400' w/ 5sx

2/53-50sx @ 8800-8620'

2/53-50sx @ 10491-10331'

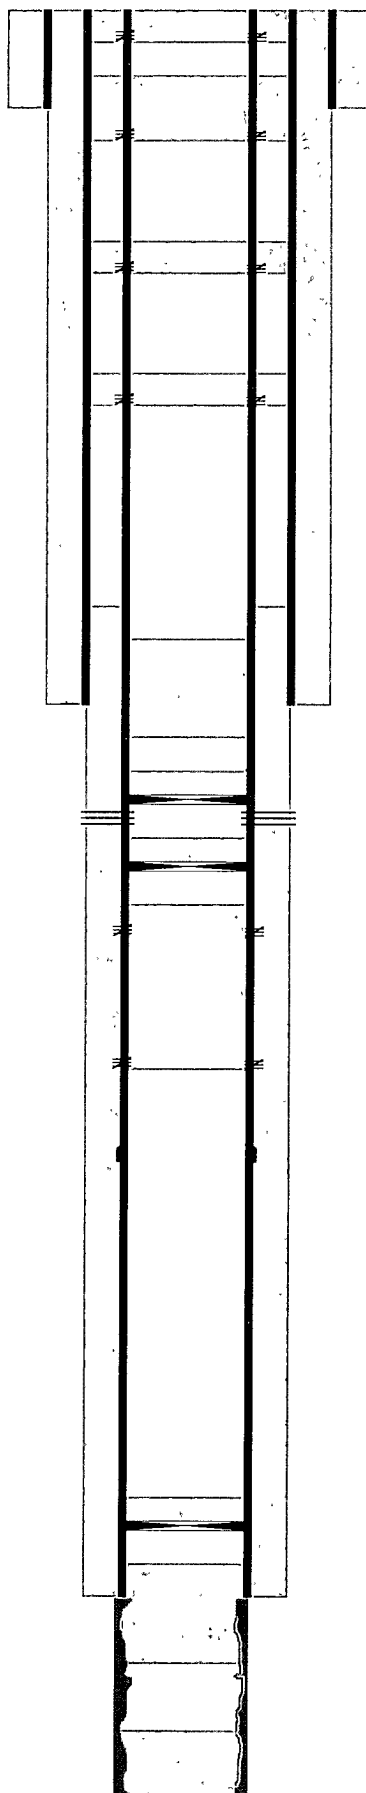

Perf @ 100'

Perf @ 442'

Perf @ 1600'

Perf @ 2300'

17-1/2" hole @ 392'
13-3/8" csg @ 392'
w/ 350sx-TOC-Surf-Circ

11" hole @ 3540'
8-5/8" csg @ 3540'
w/ 2000sx-TOC-Surf-Circ

Perfs @ 4088-4200"

Perf @ 5010' sqz 300sx-TOC-3155'-TS


Perf @ 5320' sqz 500sx-TOC-5010'-TS

7-7/8" hole @ 10491'
5-1/2" csg @ 8630'
DVT @ 5980'
1st w/ 500sx-TOC-5975'-Calc
2nd w/ 400sx-TOC-5320'-TS

OH @ 8630-10491'

TD-10491

OXY USA Inc. - Current
State AD #2
API No. 30-025-00024

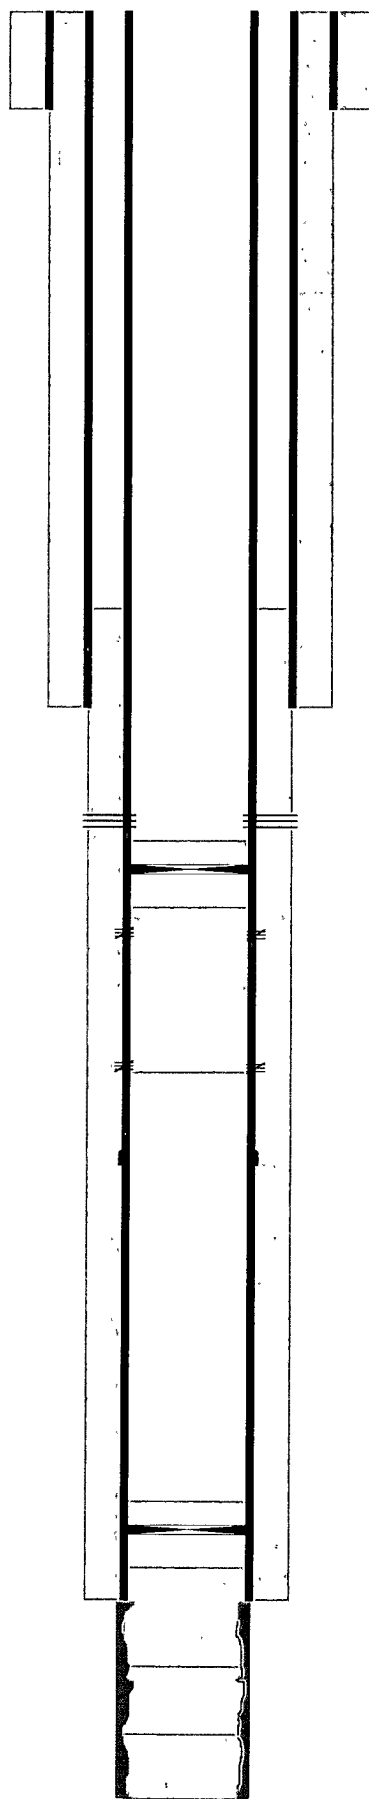

17-1/2" hole @ 392'
13-3/8" csg @ 392'
w/ 350sx-TOC-Surf-Circ

11" hole @ 3540'
8-5/8" csg @ 3540'
w/ 2000sx-TOC-Surf-Circ

5/62-CIBP @ 4306' w/ 5sx

Perfs @ 4088-4200"

Perf @ 5010' sqz 300sx-TOC-3155'-TS

Perf @ 5320' sqz 500sx-TOC-5010'-TS

5/62-CIBP @ 8400' w/ 5sx

2/53-50sx @ 8800-8620'

7-7/8" hole @ 10491'
5-1/2" csg @ 8630'
DVT @ 5980'
1st w/ 500sx-TOC-5975'-Calc
2nd w/ 400sx-TOC-5320'-TS

2/53-50sx @ 10491-10331'

OH @ 8630-10491'