
Submit 3 Copies To Appropriate District Office	State of New M	exico	Form C-103		
	Energy, Minerals and Nati	ural Resources	May 27, 2004		
1625 N. French Dr., Hobbs, No.		WEI	LL API NO.		
1301 W. Grand Ave., Artesia, NM 88210	District I 1625 N. French Dr., Hobbs, No. 1625 N. French Dr.,		30-025-02734 / ndicate Type of Lease		
District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV	U 1220 South St. Fra	ncis Dr.	STATE STEE		
District IV	Santa Fe, NM 8	7505 6. S	tate Oil & Gas Lease No.		
District IV 1220 S St. Francis Dr., Santa Fe, MBBSOC 87505	(the f				
SUNDRY NOTICES A	AND REPORTS ON WELLS		ease Name or Unit Agreement Name		
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH			TE TA		
PROPOSALS.)			. 1127		
1. Type of Well: Oil Well Gas Well Other			/ell Number		
2. Name of Operator			GRID Number		
DEVON ENERGY PRODUCTION COMPANY, LP  3. Address of Operator			Pool name or Wildcat Townsend.		
20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615			Wolfcamp Unor Don		
4. Well Location			Wolfeamp Upper Penn		
Unit Letter_V : 330	feet from the South	_ line and _1650'feet f	rom the West line		
Section 3			MPM County Lea		
	Elevation (Show whether DR		County Lea		
402	4' KB; 4011' GL				
Pit or Below-grade Tank Application  or Closu	<del></del>				
Pit typeDepth to Groundwater	Distance from nearest fresh	water well Distance fro	om nearest surface water		
Pit Liner Thickness: mil B	elow-Grade Tank: Volume	bbls; Construct	on Material		
12. Check Appro	priate Box to Indicate N	Vature of Notice, Repo	rt or Other Data		
	_				
NOTICE OF INTENTION TO:  SUBSEQUENT REPORT OF:					
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐ REMEDIAL WORK ☐ ALTERING CASING TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ COMMENCE DRILLING OPNS.☐ P AND A ☐					
<del></del> -	TIPLE COMPL	CASING/CEMENT JOB			
_	_				
OTHER:		OTHER:			
of starting any proposed world)	perations. (Clearly state all	pertinent details, and give	pertinent dates, including estimated date ellbore diagram of proposed completion		
or recompletion.	ee Roce 1105. For Munip	ne Completions. Attach w	enbore diagram of proposed completion		
0.1000mp.0					
1. MIRU. TIH to 9755' PBTD. C					
2. Spot 25 sx cmt from 8100' to		')			
<ul><li>3. Free point 5-1/2" casing. Cu</li><li>4. Spot 30 sx cmt stub plug 50'</li></ul>		50' above stub or shall	lower		
5. Spot 35 sx cmt from 4735' to	4600'. WOC. Tag at 46:	35' or shallower (8-5/8'	' shoe at 4685')		
6. Spot 30 sx cmt from 3115' to	3000'. (base of salt)	,	51100 at 4000 j.		
7. Spot 30 sx cmt from 1900' to	1785'. (top of salt)				
8. Spot 30 sx cmt from 384' to 269'. WOC. Tag at 284' or shallower. (13-3/8" shoe at 334').					
9. Circulate 30 sx (115') cmt for surface plug. 10. Cut wellhead off and set dry hole marker.					
10. Out weinicad on and set dry	noie marker.				
I hereby certify that the information above	is true and complete to the h	act of my knowledge and b	aliaf To a group of the same		
grade tank has been/will be constructed or closed a	ccording to NMOCD guidelines [	ost of my knowledge and o	ttached) alternative OCD-approved plan .		
(i/2 · X /	/		<u> </u>		
SIGNATURE KYMME SIGNATURE	TITLE_	_Operations Technician	DATE <u>3-2</u> 3-10		
Type or print name Ronnie Slack	E-mail address: R	donnie.Slack@dvn.com	Telephone No. 405-552-4615		
For State Use Only			1 100 100 1010		
APPROVED BY	. U	Com m			
APPROVED BY: TITLE THE DATE 3-3/-/O Conditions of Approval: the operator					
Conditions of Approval. the operation					
shall give 24 hour notice the the appropriate					
District office before work begins.					

DEVON ENERGY PRODUCTION COMPANY LP				
Well Name: STATE TA 3	Field: TOWNSEND			
Location: 330' FSL & 1650' FWL; SEC 3-T16S-R35E	County: LEA	State: NM		
Elevation: 4024' KB; 4011' GL; 13' KB-GL	Spud Date: 10/16/53   Compl Date: 12/20/53			
API#: 30-025-02734 Prepared by: Ronnie Slack	Date: 3/22/10	Rev:		

## **PROPOSED PLUG & ABANDONMENT**

17-1/4" hole 13-3/8", 48#, S40, @ 334' 350 sx cmt to surface

11" hole 8-5/8", 32#, J55, @ 4685' 2350 sx cmt to surface

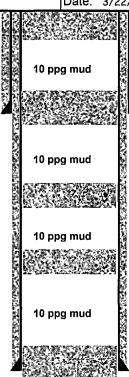

Proposed:

1. Circ 30 sx (115') cmt for surface plug.

Proposed:

1. Spot 30 sx cmt from 384' to 269'. WOC & Tag.

Proposed:

1. Spot 30 sx cmt from 1900' to 1785' (top of salt)


Proposed:

1. Spot 30 sx cmt from 3115' to 3000'. (base of salt)

Proposed:

1. Spot 35 sx cmt from 4735' to 4600'. WOC & Tag.

10 ppg mud

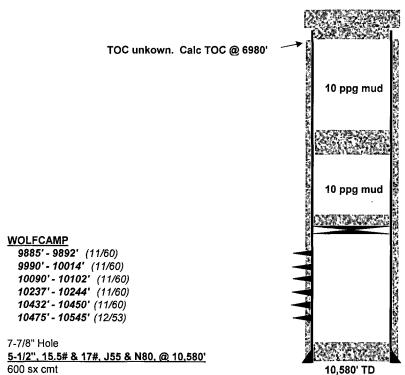

Proposed:

1. Free point 5-1/2" casing. Cut & POOH.

2. Spot 30 sx stub plug 50' below stub.

3. WOC & Tag minimum 50' above casing stub.

Proposed:

Spot 25 sx cmt from 8100' to 7853 (top of Abo 8110')

9755' PBTD (7/8/05) CIBP @ 9790' + 35' cement (7/8/05)

10,560' PBTD

600 sx cmt

