

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-HOBBS

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
OXY USA Inc.

16696

3a. Address
P.O. Box 50250, Midland, TX 79710-0250

3b. Phone No. (include area code)
432-685-5717

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1650 FNL 2620 FEL SWNE(G) Sec 26 T22S R32E

5. Lease Serial No

NM2379

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No

8. Well Name and No.

Covington A
Federal

#38

9 API Well No.

30-025-34753

10. Field and Pool, or Exploratory Area
Red Tank, West Delaware

11. County or Parish, State

Lea

NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☒ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity


☐ Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

RECEIVED
JUN 28 2010
HOBBSOCD

Accepted as to plugging of the well bore.
Liability under bond is retained until
Surface restoration is completed.

See Attached

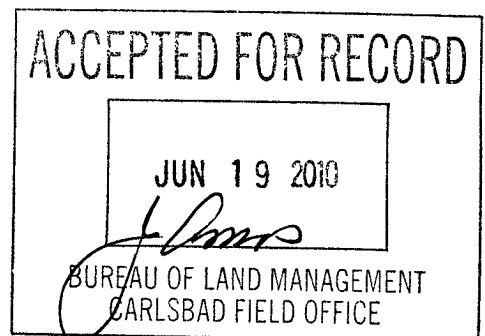

Reclamation Due 11-1-10

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

6/10/10

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

EG 6-8-10

Date

JUN 28 2010

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

7m

Covington A Federal #38

4/14/10 MIRU, NDWH, NU BOP, Load hole w/ 10# brine, Rel RBP & POOH, RIH w/ tbg to 8592'
4/15/10 Kill well w/ 10# brine, spot 25sx CI H cmt @ 8592', WOC
RIH w/ tbg, no tag (CALLED BOB HOSKINSON W/ BLM, OK'd to re-spot plug)
Spot 25sx CI H cmt @ 8592', POOH, WOC
4/16/10 RIH & tag @ 7537', tag was high, called BLM, will drill out after cmt sqz.
4/19/10 RIH w/ pkr to 4500', EIR, sqz 50sx CI C cmt w/ 2% CaCl₂ cmt into perms @ 4902-4922', WOC
Test sqz to 500#, OK, Rel Pkr, POOH.
4/20/10 RIH W/ 3 3/4" BIT BIT SUB , 6-3 1/8" COLLARS AND X-OVER
Tag cmt @ 4836', drill out cmt to 4922', test perms to 700# for 30min, OK
RD swivel, RIH w/ tbg & tag @ 7537'
4/21/10 Drill out cmt from 7537-7856', POOH
4/22/10 RIH & tag @ 7856', RU swivel drill cmt to 8572', circ clean, POOH
4/23/10 LD drill collars
4/26/10 RIH to 8572', load hole w/ 10# MLF, spot 25sx CI H cmt @ 8572', WOC
RIH & tag cmt @ 8100', PUH to 8062', spot 25sx CI H cmt. PUH, WOC
4/27/10 RIH & tag cmt @ 7725', PUH to 6604', spot 30sx CI H cmt , PUH, WOC
RIH & tag cmt @ 6175', PUH to 4998', spot 30sx CI C perms across perms @ 4902-4922', POOH, WOC
4/28/10 RIH & tag cmt @ 4512', PUH & perf @ 2825'
RIH & set pkr @ 2326', sqz 40sx CI C cmt w/ 2% CaCl₂, SI w/ 500#, WOC
Rel pkr, POOH, RIH & tag cmt @ 2686', POOH
4/29/10 RIH & perf @ 1280', ND BOP, NUWH, circ 230sx CI C cmt @ 1280' to Surface
4/30/10 Top csg, RDMO