

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Ave., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

RECEIVED
AUG 09 2010
HOBBSOCD

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☒ 2. Name of Operator Yates Petroleum Corporation 3. Address of Operator 105 South Fourth Street, Artesia, NM 88210 4. Well Location Unit Letter <u>M</u> : <u>660</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>West</u> line Section <u>34</u> Township <u>10S</u> Range <u>34E</u> NMPM <u>Lea</u> County		WELL API NO. 30-025-36713 5. Indicate Type of Lease STATE ☒ FEE ☐ 6. State Oil & Gas Lease No. VO-6057 7. Lease Name or Unit Agreement Name Dolly BER State Com 8. Well Number 1 9. OGRID Number 025575 10. Pool name or Wildcat Undes. Sand Springs; Atoka-Morrow ☒ Sand Springs; Mississippian
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4201'GR		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐

OTHER: ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. Load hole and release packer and TOH
2. Spot a 25 sx cement plug from 12292'-12178'. WOC and tag plug.
3. Spot a 25 sx cement plug from 12068'-11957'. WOC and tag plug.
4. Spot a 25 sx cement plug from 11443'-11328'. WOC and tag plug.
5. Spot a 25 sx cement plug from 8500'-8400'.
6. Spot a 25 sx cement plug from 5600'-5500'.
7. Spot a 25 sx cement plug from 4960'-4789'.
8. Spot a 25 sx cement plug from 4300'-4200'. WOC and tag plug.
9. Spot a 25 sx cement plug from 2000'-1900'.
10. Perforate squeeze holes at 483'. Circulate cement from 490' to surface.
11. Remove all surface equipment, weld dry hole marker and clean location as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE August 4, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 8-11-10

Conditions of Approval (if any):

Rm

Well Name: Dolly BER State Com No. 1 Field: _____

Location: 660' FSL & 660' FWL Sec. 34-10S-34E Lea Co, NM

GL: 4201' Zero: _____ AGL: _____ KB: 4218'


Spud Date: 6/21/04 Completion Date: _____

Comments: _____

Casing Program

Size/Wt/Grade/Conn	Depth Set
13 3/8" 48# H40	433'
9 5/8" 36 & 40# J55 & HCK55	4250'
5 1/2" 17# J55, L80, HCP110	12845'

PROPOSED CONFIGURATION

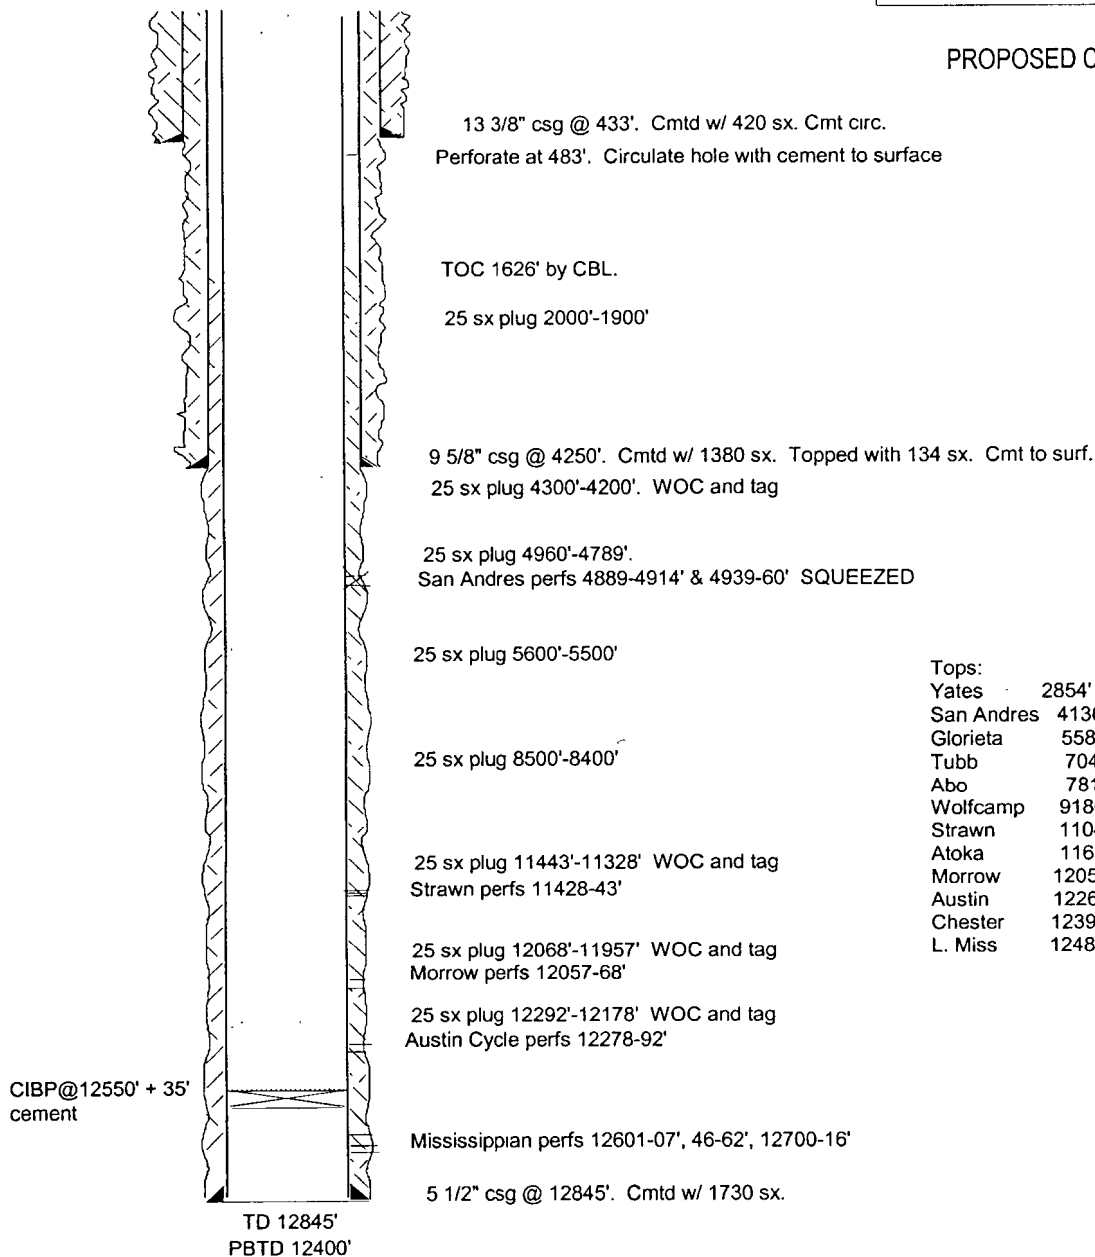

Tops:	
Yates	2854'
San Andres	4136'
Glorieta	5588'
Tubb	7040'
Abo	7818'
Wolfcamp	9180'
Strawn	11040'
Atoka	11612'
Morrow	12056'
Austin	12268'
Chester	12394'
L. Miss	12486'

SKETCH NOT TO SCALE

DATE: 1/7/10 DOLLY11

Well Name: Dolly BER State Com No. 1 Field: _____

Location: 660' FSL & 660' FWL Sec. 34-10S-34E Lea Co, NM

GL: 4201' Zero: _____ AGL: _____ KB: 4218'


Spud Date: 6/21/04 Completion Date: _____

Comments: _____

Casing Program

Size/Wt/Grade/Conn	Depth Set
13 3/8" 48# H40	433'
9 5/8" 36 & 40# J55 & HCK55	4250'
5 1/2" 17# J55, L80, HCP110	12845'

CURRENT CONFIGURATION

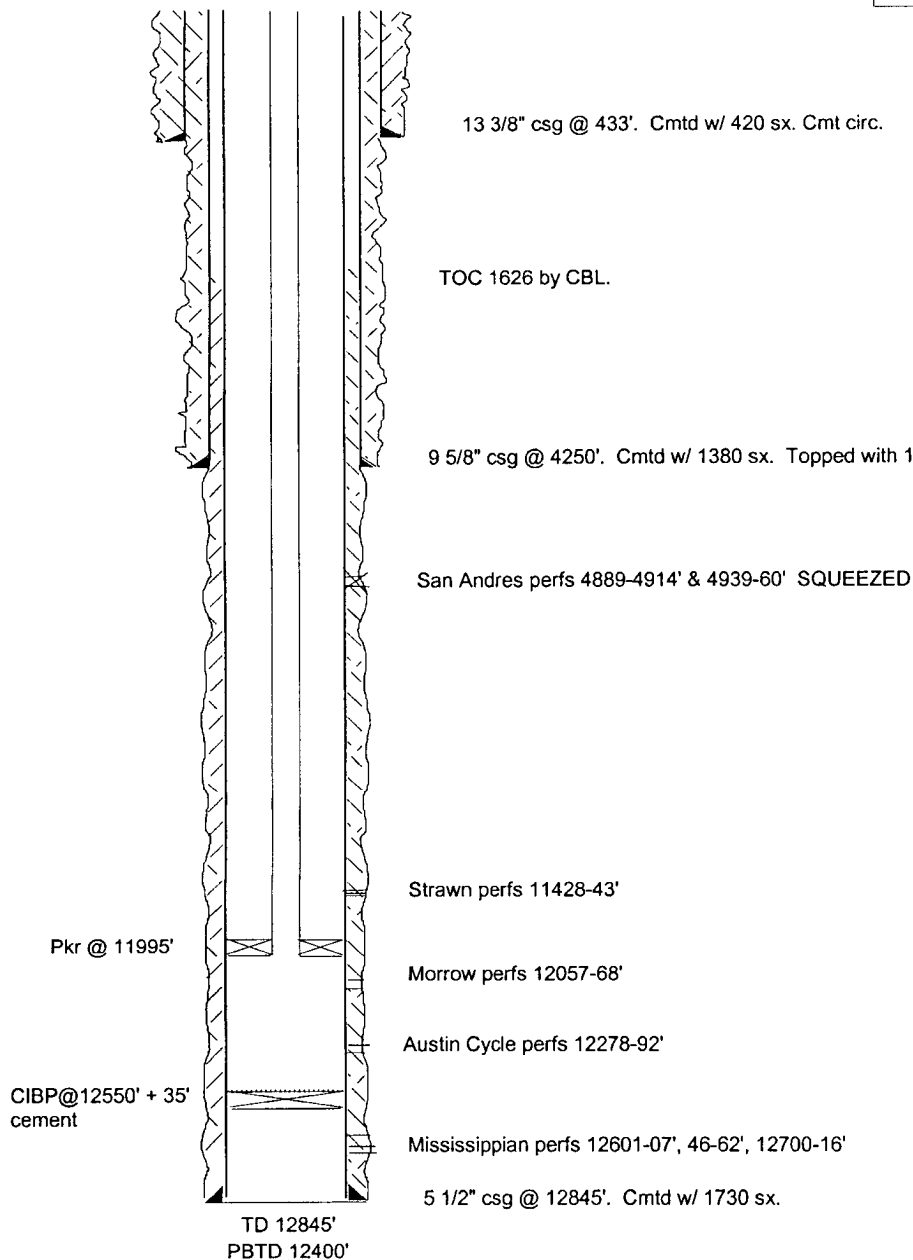

Tops:	
Yates	2854'
San Andres	4136'
Glorieta	5588'
Tubb	7040'
Abo	7818'
Wolfcamp	9180'
Strawn	11040'
Atoka	11612'
Morrow	12056'
Austin	12268'
Chester	12394'
L. Miss	12486'

SKETCH NOT TO SCALE

DATE: 1/7/10 DOLLY1H