

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

RECEIVED

SEP 10 2010

HOBBSDO

WELL API NO. 30-025-10026
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: W.M. Rinewalt
8. Well Number 2
9. OGRID Number 16696
10. Pool name or Wildcat Eunice San Andres, SW <i>Blindby</i>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3456' GR
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>
2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250
4. Well Location Unit Letter <u>E</u> : <u>1874</u> feet from the <u>north</u> line and <u>750</u> feet from the <u>west</u> line Section <u>4</u> Township <u>22S</u> Range <u>37E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3456' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/> OTHER: <input type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input type="checkbox"/> CASING TEST AND CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completion, include a diagram of proposed completion or recompletion.

See Attachment

The Oil Conservation Division **Must be notified 24 hours prior** to the beginning of plugging operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 9/8/10

Type or print name David Stewart

E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE Staff MGR DATE 9-13-10


Conditions of Approval, if any:

TD-8136' PBTD-3624' Perfs-3864-3998' CIBP-3624'

13-3/8" 48# csg @ 308' w/ 300sx, 17-1/4" hole, TOC-Surf-Circ
9-5/8" 36# csg @ 2975' w/ 1300sx, 12-1/4" hole, TOC-535'-TS
7" 23-26# csg @ 7980' w/ 900sx, 8-3/4" hole, TOC-3245'-TS

1. RIH & tag CIBP @ 3624', M&P 25sx cmt
2. Perf @ 3025' sqz 50sx cmt to 2925' WOC-Tag
3. Perf @ 2500' sqz 45sx cmt to 2400' WOC-Tag
4. Perf @ 1200' sqz 45sx cmt to 1100' WOC-Tag
5. Perf @ 7" & 9-5/8" @ 358' sqz 280sx cmt to Surface
10# MLF between plugs

OXY USA Inc. - Current
Rinewalt #2
API No. 30-025-10026

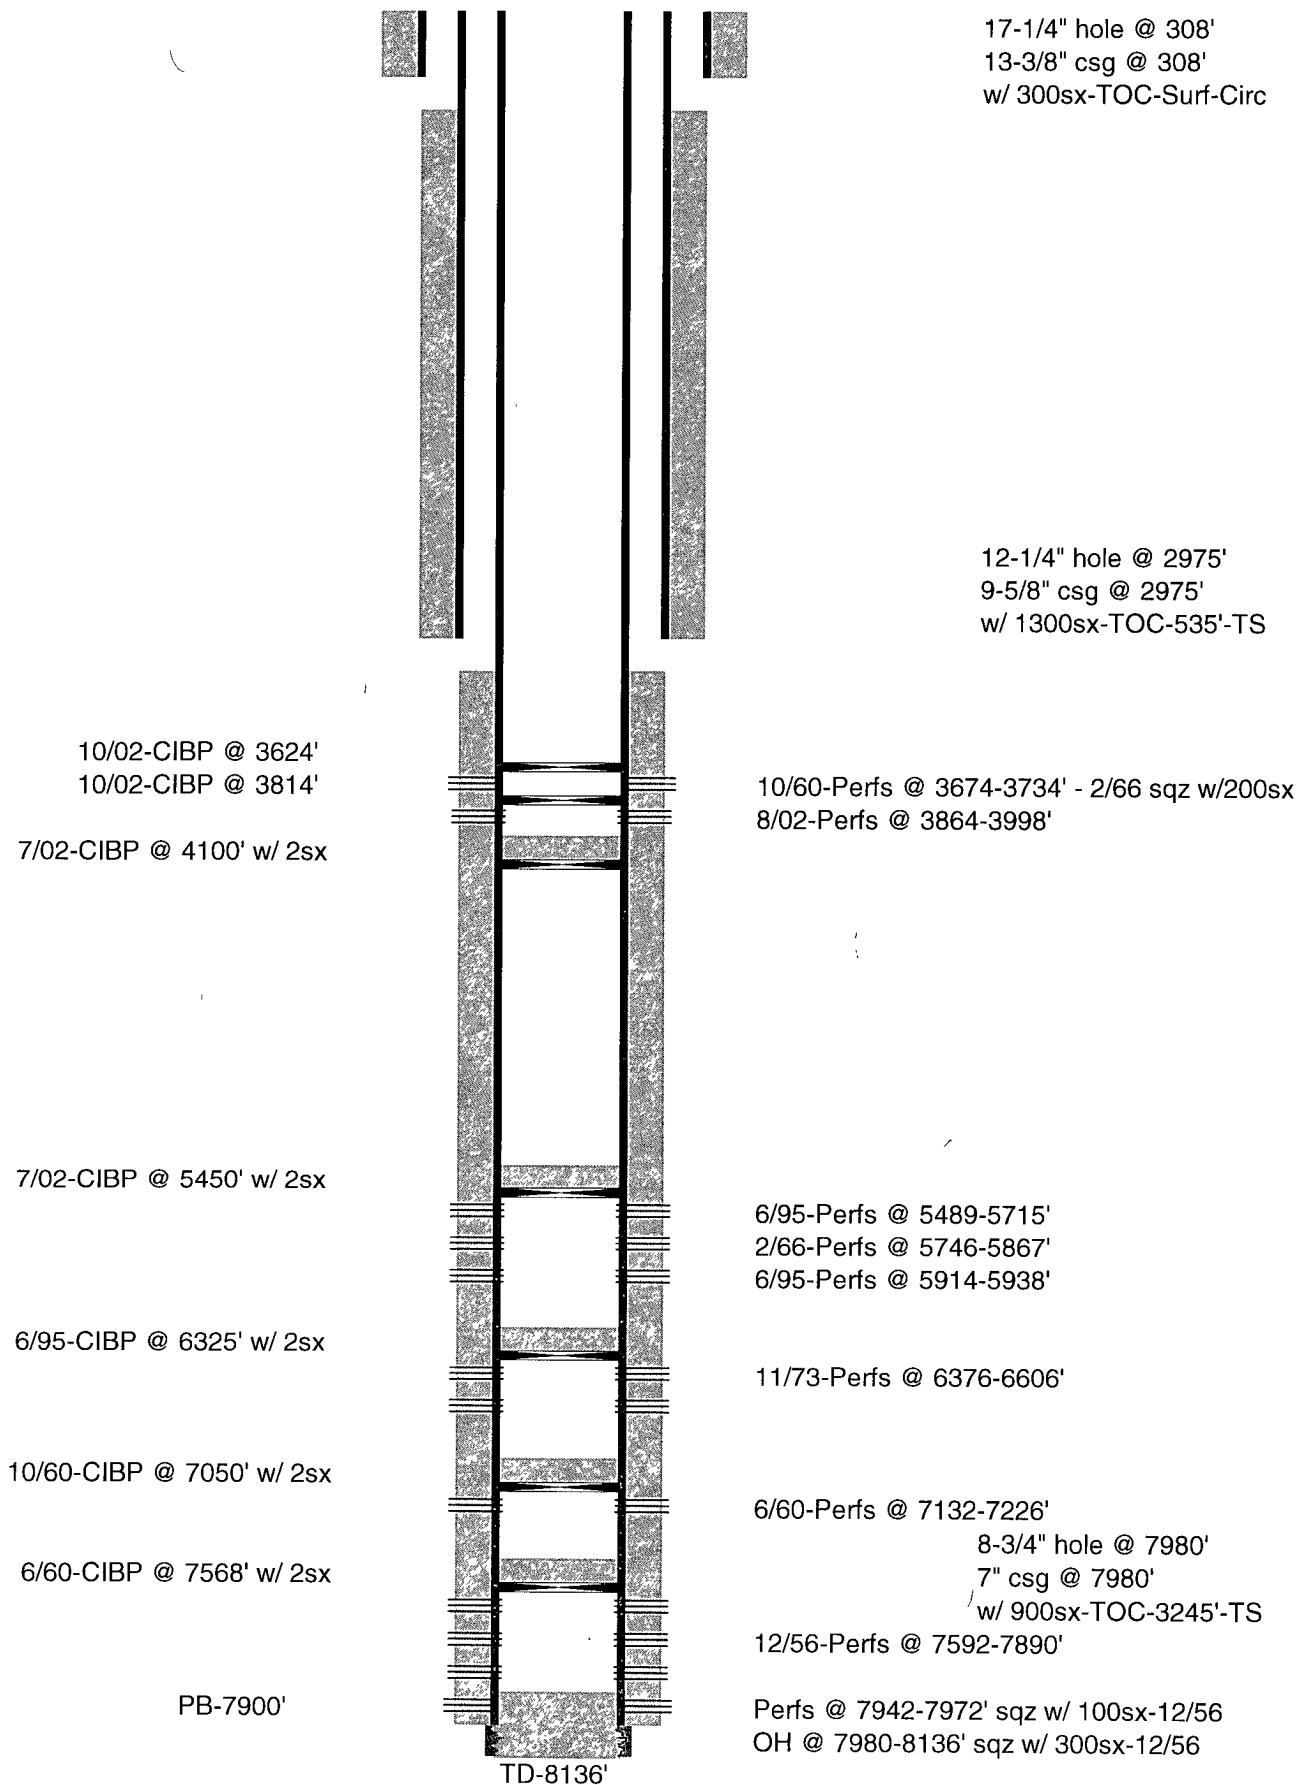

OXY USA Inc. - Proposed
Rinewalt #2
API No. 30-025-10026

280sx @ 358'-Surface

45sx @ 1200-1100' WOC-Tag

45sx @ 2500-2400' WOC-Tag

50sx @ 3025-2925' WOC-Tag

25sx @ 3624'

10/02-CIBP @ 3624'
10/02-CIBP @ 3814'
7/02-CIBP @ 4100' w/ 2sx

7/02-CIBP @ 5450' w/ 2sx


6/95-CIBP @ 6325' w/ 2sx

10/60-CIBP @ 7050' w/ 2sx

6/60-CIBP @ 7568' w/ 2sx

PB-7900'

TD-8136'

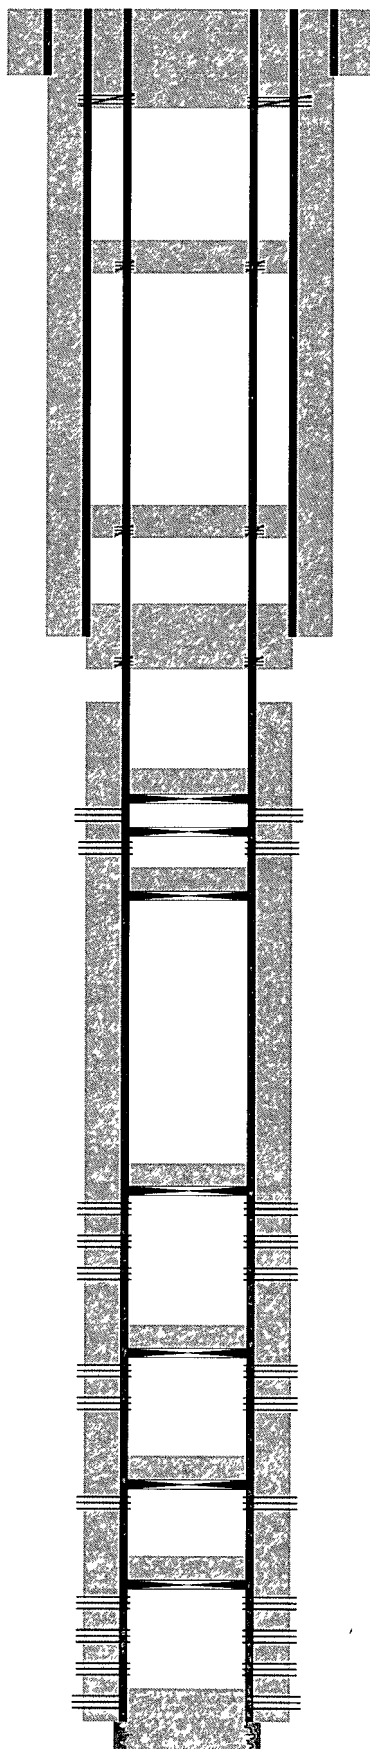

17-1/4" hole @ 308'
13-3/8" csg @ 308'
w/ 300sx-TOC-Surf-Circ

Perf 7" & 9-5/8" @ 358'

Perf @ 1200'

Perf @ 2500'

12-1/4" hole @ 2975'
9-5/8" csg @ 2975'
w/ 1300sx-TOC-535'-TS

Perf @ 3025'

10/60-Perfs @ 3674-3734' - 2/66 sqz w/200sx
8/02-Perfs @ 3864-3998'

6/95-Perfs @ 5489-5715'
2/66-Perfs @ 5746-5867'
6/95-Perfs @ 5914-5938'

11/73-Perfs @ 6376-6606'

6/60-Perfs @ 7132-7226'
8-3/4" hole @ 7980'
7" csg @ 7980'
w/ 900sx-TOC-3245'-TS
12/56-Perfs @ 7592-7890'

Perfs @ 7942-7972' sqz w/ 100sx-12/56
OH @ 7980-8136' sqz w/ 300sx-12/56