

RECEIVED

SEP 10 2010

HOBBSOCD

CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-31458

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B-4119

7. Lease Name or Unit Agreement Name

West Lovington Unit (26753)

8. Well Number

93

9. OGRID Number

241333

10. Pool name or Wildcat

Lovington; Upper San Andres, West

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Chevron Midcontinent, L.P.

3. Address of Operator

#15 Smith Rd., Midland, TX 79705

4. Well Location

Unit Letter M : 1305 feet from the South line and 1305 feet from the West lineSection 5 Township 17-S Range 36-E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL M Sect 5 Twp 17-S Rng 36-E Pit type Steel Depth to Groundwater _____ Distance from nearest fresh water well Over 1000'

Distance from nearest surface water _____ Below-grade Tank Location UL _____ Sect _____ Twp _____ Rng _____ ;

1305 feet from the South line and 1305 feet from the West line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING ☐ PLUG AND ABANDONMENT ☐CASING TEST AND CEMENT JOB ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or log. Estimated date of completion

1. Notify OCD 24 hrs. prior to MI and RU. 7. Spot 50sx cmt. plug from 400'-surface. (Fr.Wtr./surface) WOC&Tag.

2. RIH tag CIBP@4690' and spot 25sx cement plug from 4690'-4490' (S.Andres). 8. Install dryhole marker.

3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.


4. Spot 25sx cement plug from 3150'-2950' (B-Salt est.)

5. Spot 25sx cement plug from 2150'-1950' (T-Salt est.)

6. Perf and squeeze 55sx cement plug from 1415'-1215'. (shoe) WOC&TAG

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE



TITLE

Agent for Chevron USA, Inc.

DATE

9-09-2010

Type or print name


M. Lee Roark

E-mail address:

Telephone No. 432-561-8600

(This space for State use)

APPROVED BY

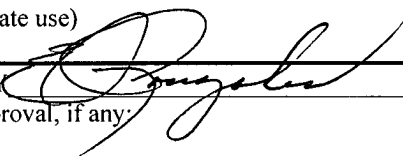

TITLE

STAFF MGR

DATE

9-13-10

Conditions of approval, if any:

PLUGGING & ABANDONMENT WORKSHEET (STRING CSNG)

OPERATOR Chevron Midcontinent, L.P.

LEASENAME West Lovington Unit

WELL # 93
 SECT 5 TWN 17S RNG 36E
 FROM 1305 N/S/L 1305 E/W/L
 TD: 5230 FORMATION @ TD
 PBTD: FORMATION @ PBTD

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	8 5/8	1315	surface	circulated
INTMED 1				
INTMED 2				
PROD	5 1/2	5230	surface	circulated
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2				
	CUT & PULL @			TOP - BOTTOM
INTMED 1			PERFS	4787 - 5128
INTMED 2			OPENHOLE	
PROD				

* REQUIRED PLUGS DISTRICT I

RUSTLER (ANHYD)	
YATES	
QUEEN	3804
GRAYBURG	4499
SAN ANDRES	4694
T. SALT est.	2050
CAPTAIN REEF	
B. SALT est.	3050
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRUSHY CANYON	
BONE SPRING	
GLORIETA	
BLINEBRY	
TUBB	
ORINKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
MORROW	
LESS	
DEVONIAN	

PLUG	TYPE	SACKS	DEPTH
	PLUG	CMNT	
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIBP/35'		5300
PLUG #3	CIBP	25 SXS	5300
PLUG #4	STUB	50 SXS	4600'-4700'
PLUG #7	RETNR SQZ	200 SXS	400
PLUG #8	SURF	10 SXS	0-10'
PLUG #1	CIBP	25sx	4690'-4490'
PLUG #2	B. SALT est.	25sx	3150'-2950'
PLUG #3	T. SALT est.	25sx	2150'-1950'
PLUG #4	shoe	55sx	1415'-1215'
PLUG #5	Fr. Wtr.	50sx	400'-surface
PLUG #6	surface		
PLUG #7			
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #			
PLUG #			
PLUG #			
PLUG #			

8 5/8
 @ 1315
 TOC surface

5 1/2
 @ 5230
 TOC surface


TD 5230

WLU #93
API No. 30-025-31458

8-5/8" 24# set @ 1315'
CMT w/ 500 sks
CIRC

Well Location

1305' FSL & 1305' FWL
Unit Letter M
Section 5
Township 17-S
Range 36-E
Lea County, New Mexico
Elev: 3899.2' GR

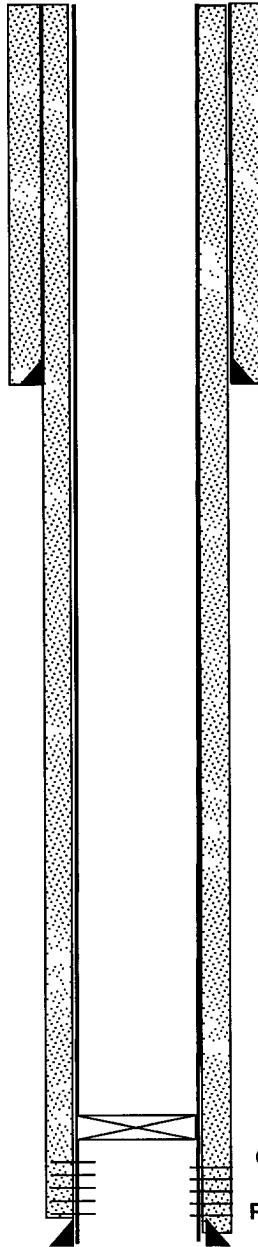

CIBP 4690'

Perf 4787'-5128'

5-1/2" 15.5# CSG - set @ 5230'
CMT w/ 1100 sks
CIRC

TD = 5230