

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Minerals and Natural Resources

Form C-103  
May 27, 2004

RECEIVED  
SEP 10 2010  
HOBBSOCD

CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-33991
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. V04799
7. Lease Name or Unit Agreement Name: State 33
8. Well Number 1
9. OGRID Number 16696
10. Pool name or Wildcat Grama Ridge Morrow, East

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other	2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	4. Well Location Unit Letter <u>K</u> : <u>1980</u> feet from the <u>south</u> line and <u>1780</u> feet from the <u>west</u> line Section <u>33</u> Township <u>21S</u> Range <u>35E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3605' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details of starting any proposed work). SEE RULE 1103. For Multiple Completions: \_\_\_\_\_

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that a pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 9/8/10

Type or print name David Stewart

E-mail address: david\_stewart@oxy.com  
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE STAFF NRE DATE 9-13-10


Conditions of Approval, if any:

The Oil Conservation Division Must be notified  
24 hours prior to the beginning of plugging operations.

TD-12625'      PBD-6050'      Perfs-6090-6118'      CIBP-6060'

13-3/8" 54.5# csg @ 1120' w/ 650sx, 17-1/2" hole, TOC-Surf-Circ  
9-5/8" 36-40# csg @ 5623', DVT @ 4423' w/ 1600sx, 12-1/4" hole, TOC-3990'-TS  
7" 23-26# csg @ 10934', DVT @ 8035' w/ 1065sx, 8-3/4" hole, TOC-4293'-Calc  
4-1/2" liner @ 10498-12625' w/ 230sx, 6-1/8" hole, TOC-10498'-Circ

1. RIH & tag Cmt/CIBP @ 6050', M&P 25sx cmt
2. M&P 30sx cmt @ 5673-5573' WOC-Tag
3. M&P 30sx cmt @ 4473-4373'
4. Cut & pull 7" csg @ +/- 4100'
5. M&P 40sx cmt @ 4150-4050' WOC-Tag
6. Perf @ 2650' sqz 80sx cmt to 2550' WOC-Tag
7. Perf @ 1170' sqz 90sx cmt to 1070' WOC-Tag
8. Perf @ 250' sqz 200sx cmt to surface  
10# MLF between plugs

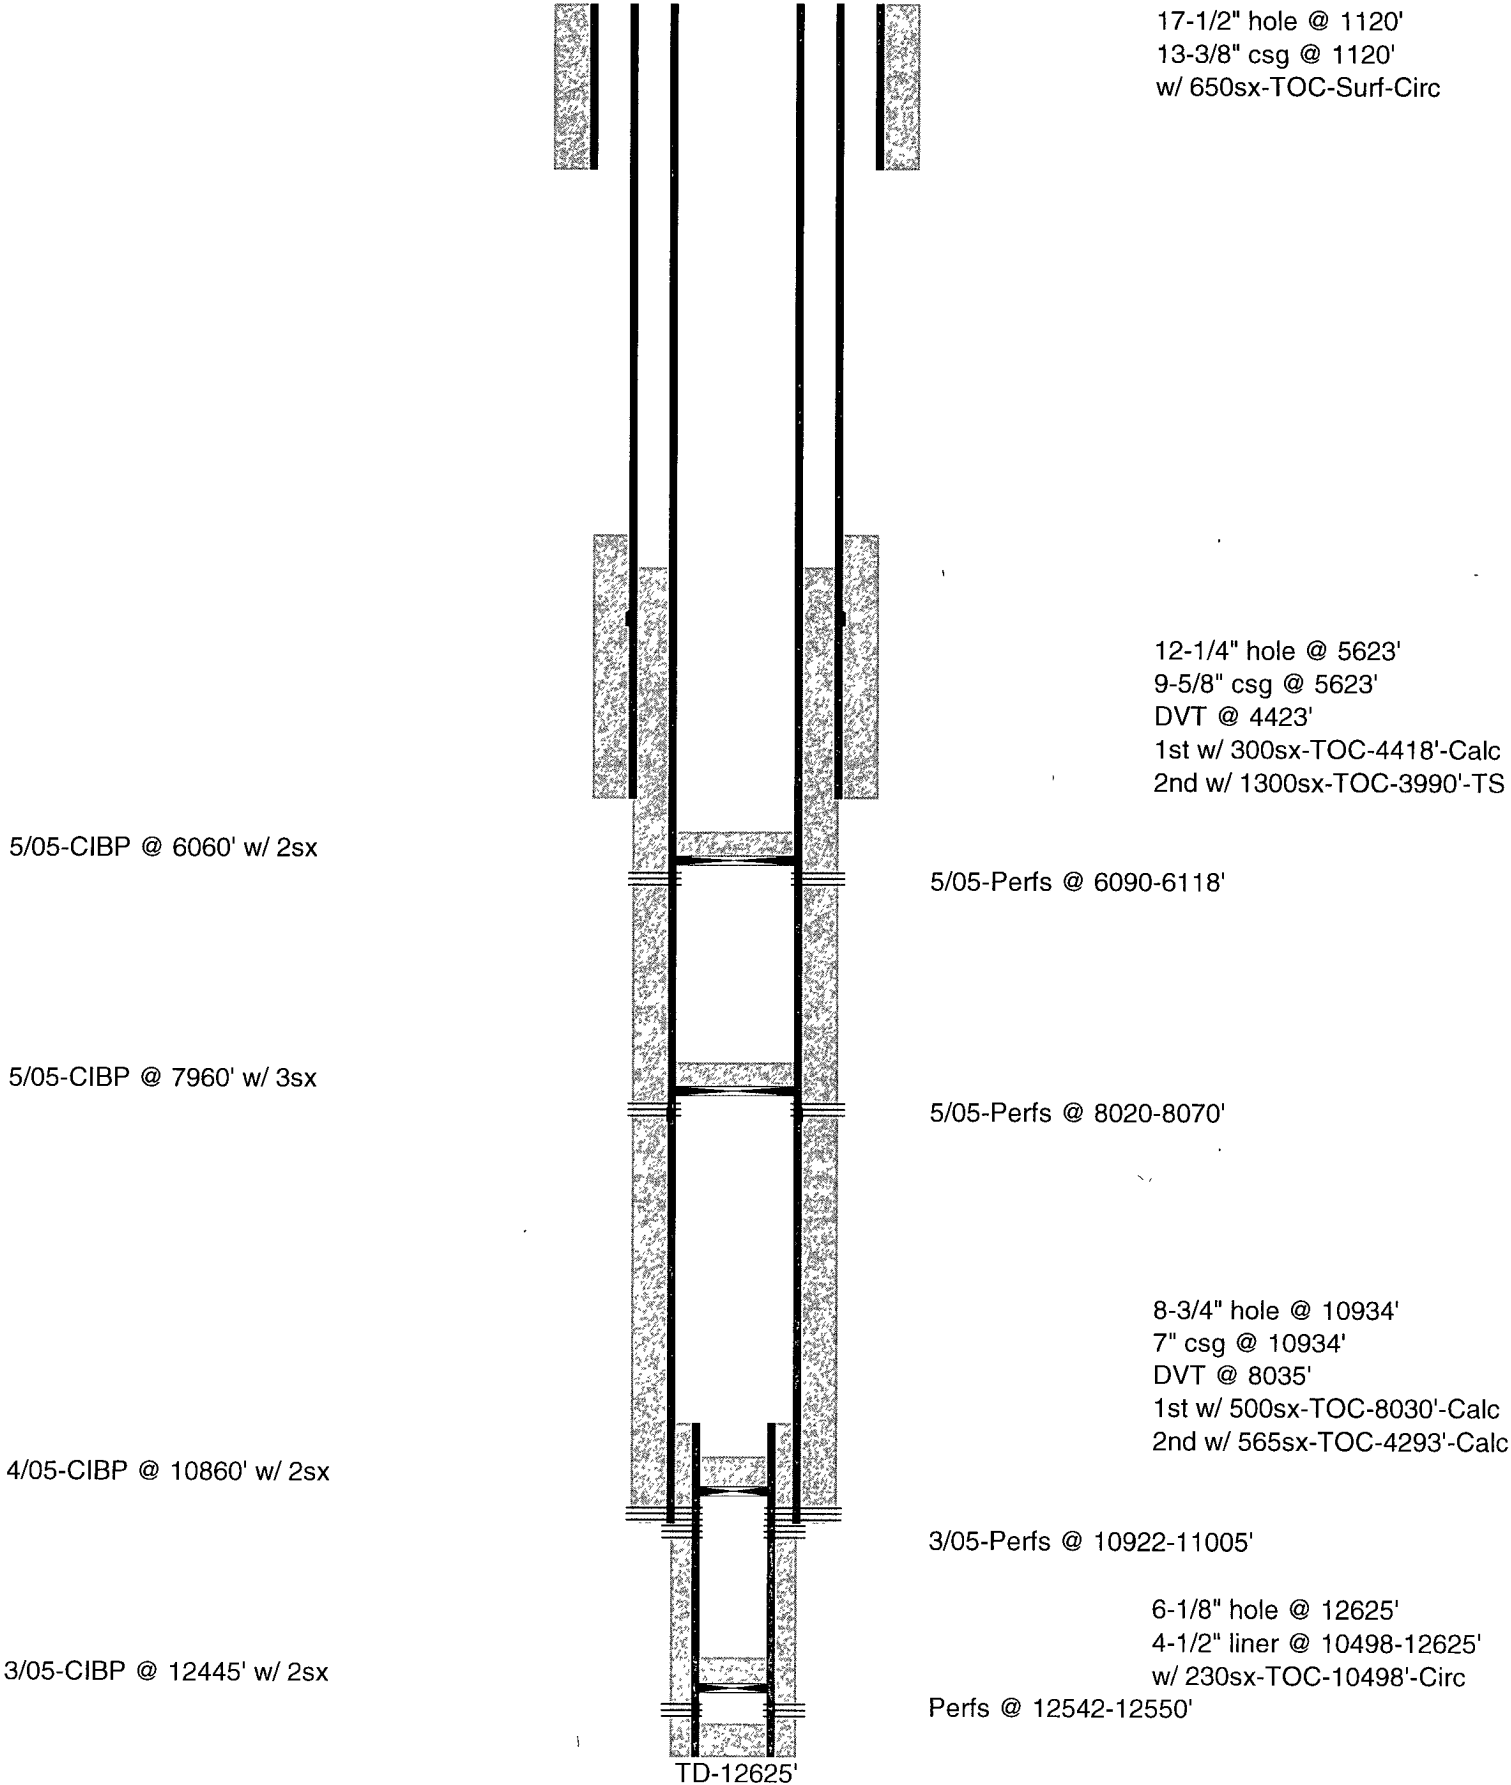

OXY USA Inc. - Proposed 2  
State 33 #1  
API No. 30-025-33991

200sx @ 250'-Surface

90sx @ 1170-1070' WOC-Tag

80sx @ 2650-2550' WOC-Tag

40sx @ 4150-4050' WOC-Tag

30sx @ 4473-4373'

30sx @ 5673-5573' WOC-Tag


10sx @ 6060'

5/05-CIBP @ 6060' w/ 2sx

5/05-CIBP @ 7960' w/ 3sx

4/05-CIBP @ 10860' w/ 2sx

3/05-CIBP @ 12445' w/ 2sx

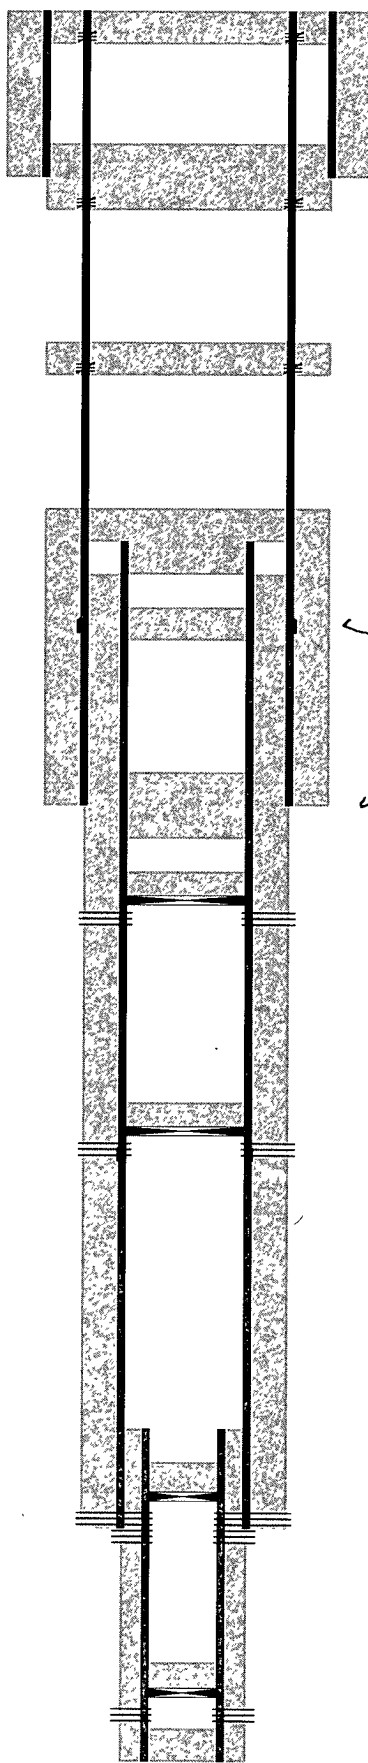

Perf @ 250'

17-1/2" hole @ 1120'  
13-3/8" csg @ 1120'  
w/ 650sx-TOC-Surf-Circ

Perf @ 1170'

Perf @ 2650'

Cut & Pull 7" csg @ +/- 4100'

12-1/4" hole @ 5623'  
9-5/8" csg @ 5623'  
DVT @ 4423'  
1st w/ 300sx-TOC-4418'-Calc  
2nd w/ 1300sx-TOC-3990'-TS

5/05-Perfs @ 6090-6118'

5/05-Perfs @ 8020-8070'

8-3/4" hole @ 10934'  
7" csg @ 10934'  
DVT @ 8035'  
1st w/ 500sx-TOC-8030'-Calc  
2nd w/ 565sx-TOC-4293'-Calc

3/05-Perfs @ 10922-11005'

6-1/8" hole @ 12625'  
4-1/2" liner @ 10498-12625'  
w/ 230sx-TOC-10498'-Circ  
Perfs @ 12542-12550'

TD-12625'