

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

| |
|--|
| WELL API NO. 30-025-22388 ✓ |
| 5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input checked="" type="checkbox"/> |
| 6. State Oil & Gas Lease No. K-4105 |
| 7. Lease Name or Unit Agreement Name: State L ✓ |
| 8. Well Number 2 ✓ |
| 9. OGRID Number 16696 ✓ |
| 10. Pool name or Wildcat Vada Penn |

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

| | |
|---|---|
| 1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> | 2. Name of Operator OXY USA Inc. ✓ |
| 3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250 | 4. Well Location Unit Letter C : 660 feet from the north line and 1980 feet from the west line Section 2 Township 10S Range 33E NMPM County Lea |
| 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4263' GR | |
| Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____ | |

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 10/21/10

Type or print name David Stewart

E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 10-21-10

Conditions of Approval, if any:


State L #2

TD-9828' Perfs-9642-9656'

11-3/4" 31.2# csg @ 332' w/ 320sx, 15" hole, TOC-Surf-Circ
8-5/8" 24-32# csg @ 4800' w/ 500sx, 11" hole, TOC-2636'-Calc
5-1/2" 17# csg @ 9892' w/ 300sx, 7-7/8" hole, TOC-7922'-Calc

1. RIH & set CIBP @ 9592', M&P 25sx cmt
2. Perf @ 7650 sqz 45sx cmt to 7550' WOC-Tag
3. Perf @ 4850' sqz 45sx cmt to 4750' WOC-Tag
4. Perf @ 3850' sqz 45sx cmt to 3750' WOC-Tag
5. Perf 5-1/2" & 8-5/8" @ 1700' sqz 70sx cmt to 1600' WOC-Tag
6. Perf 5-1/2" & 8-5/8" @ 382' sqz 250sx cmt to Surface - Verify
10# MLF between plugs ✓

OXY USA Inc.
State L #2
API No. 30-025-22388

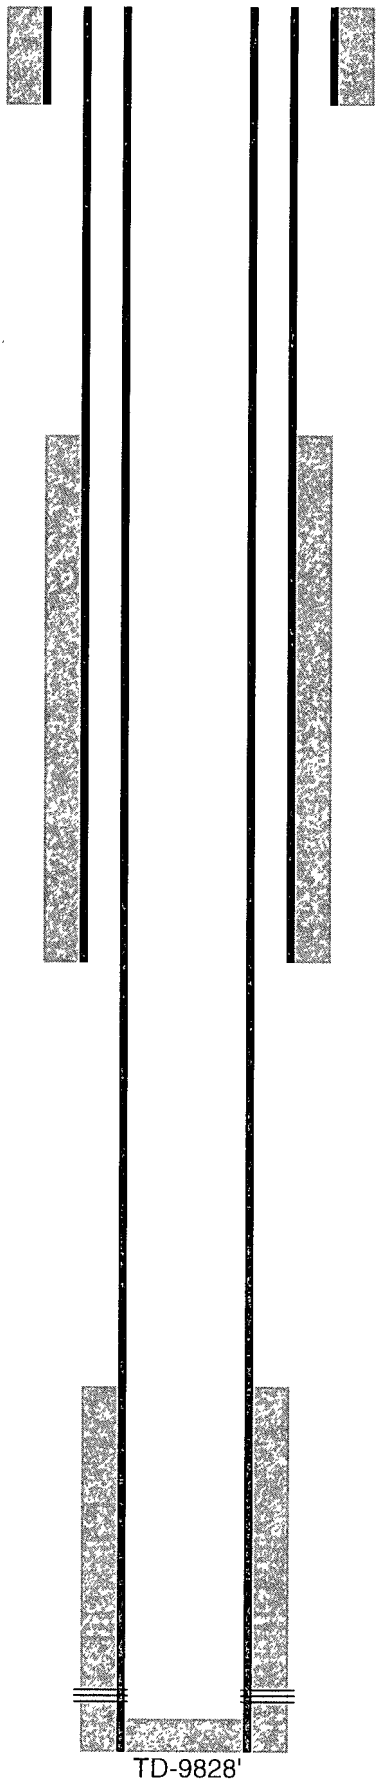

15" hole @ 332'
11-3/4" csg @ 332'
w/ 320sx-TOC-Surf-Circ

11" hole @ 4800'
8-5/8" csg @ 4800'
w/ 500sx-TOC-2636'-Calc

7-7/8" hole @ 9828'
5-1/2" csg @ 9828'
w/ 300sx-TOC-7922'-Calc

Perfs @ 9642-9656'

TD-9828'

OXY USA Inc. - Proposed
State L #2
API No. 30-025-22388

250sx @ 382'-Surface - Verify


70sx @ 1700-1600' WOC-Tag

45sx @ 3850-3750' WOC-Tag

45sx @ 4850-4750' WOC-Tag

45sx @ 7650-7550' WOC-Tag

CIBP @ 9592' w/ 25sx

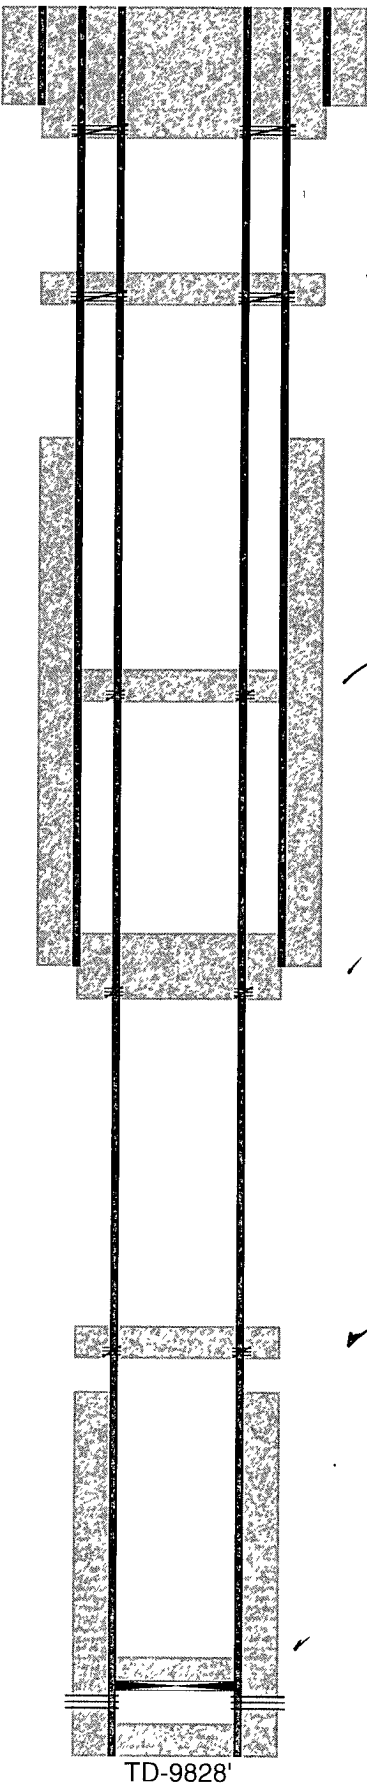

Perf @ 382'

Perf @ 1700'

Perf @ 3850'

Perf @ 4850'

Perf @ 7650'

Perfs @ 9642-9656'

15" hole @ 332'
11-3/4" csg @ 332'
w/ 320sx-TOC-Surf-Circ

11" hole @ 4800'
8-5/8" csg @ 4800'
w/ 500sx-TOC-2636'-Calc

7-7/8" hole @ 9828'
5-1/2" csg @ 9828'
w/ 300sx-TOC-7922'-Calc

TD-9828'