

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

RECEIVED
CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
DEC 14 2010

HOBBSOCD

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. <u>30-025-25556</u> ✓
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒ ✓
2. Name of Operator <u>VPR operating, LLC</u> ✓		6. State Oil & Gas Lease No.
3. Address of Operator <u>1406 Camp Craft Rd. Ste. 106, Austin, TX 78746</u>		7. Lease Name or Unit Agreement Name <u>SFPRR</u> ✓
4. Well Location Unit Letter <u>K</u> : <u>1798</u> feet from the <u>South</u> line and <u>2062</u> feet from the <u>West</u> line Section <u>33</u> Township <u>9S</u> Range <u>37E</u> NMPM County <u>Lea</u>		8. Well Number <u>23</u> ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>GL 3975'</u>		9. OGRID Number <u>266091</u> ✓
		10. Pool name or Wildcat <u>West Scurry, San Andres</u>

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REWORK ☐ ALTERING CASING ☐
Casing Operations ☐ P AND A ☐
The Oil Conservation Division **Must be notified**
24 hours prior to the beginning of plugging operations. ☐ Date

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent details of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach well completion or recompletion.

MIRU. Pull rods & plug.
Run 4 1/2" CSG scraper to 4850. Pump truck test tubing for integrity.
Mix and pump 50 sx class C 2% CaCl2 cement plug spot same
from 4850' to —. WOC 4 hrs. Tag cement plug.
Circulate well w/ gelled brine. POH to 2913'. Spot 25 sx cement plug
from 2913-2700'. POH to 2250' spot 25 sx. plug. POH to 450'.
spot 25 sx.
spot 105x. surface plug. Cut off well head, install DH marker. Clear location
per NMOCB guide line

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE [Signature] TITLE Agent DATE 12/14/2010
Type or print name M. Y. Merchant E-mail address: mymerche@hotmail.com PHONE: (575) 492-1236
For State Use Only

APPROVED BY: [Signature] TITLE Staff Mgr DATE 12-14-10
Conditions of Approval (if any):

VPR OPERATING, LLC

EXISTING

WELL: SFPRR # 23		FIELD: SAWYER		DATE: 12 DEC 2010		
LOCATION: 1798' FSL & 2062' FWL		SECTION 33, T09S-R37E				
COUNTY: LEA		STATE: NEW MEXICO		BY: J R HULING		
API # 30-025-25556		SIZE, IN	WGT, #/FT	GRADE	THREAD	DEPTH
GL: 3,968'	CASING:	8-5/8	24	H-40	ST&C	431'
KB: 3,979'	CASING:	4-1/2	10.5	J-55	ST&C	4,991'
SPUD: 10/18/76	CASING:					
TD: 4,992'	PBTD: 4,975'	TUBING:	2-3/8	4.7	J-55	EUE-8RD +/- 4,955'

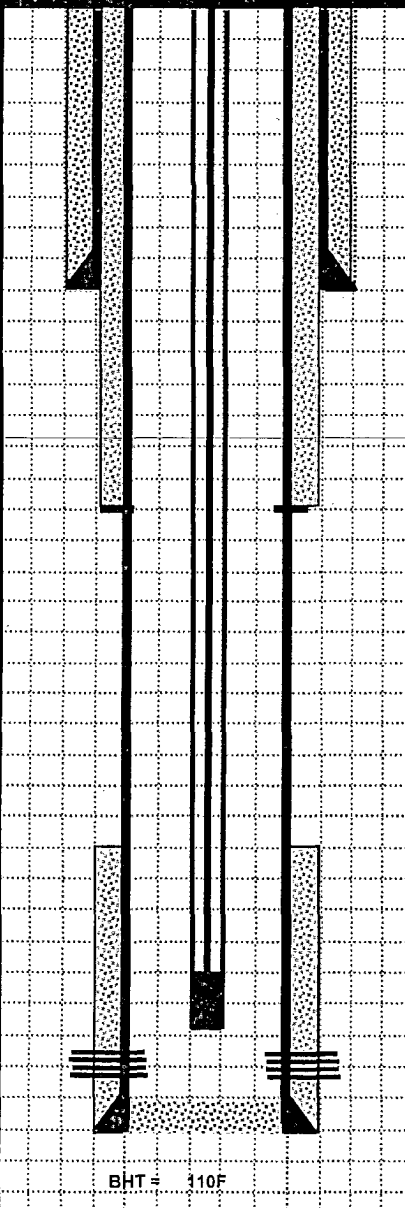

12-1/4" SURFACE HOLE DRILLED TO 431'
8-5/8" SURFACE CSG @ 431' CMT'd T/ Surf. W/ 250 SX CMT
DV Tool @ 2,863'; 1000 SX Cemented to Surface Thru DV Tool
TOPS: ANHY-2265'; YATES - 2939'; SAN ANDRES - 4201'.
BHA: 159 JTS 2-3/8", 4.7#, J-55, EUE-8RD TBG, TAC (?), ? JTS 2-3/8" TBG, SN, ?' PS, BULL PLUG; EOT @ +/- 4955'; 138 3/4" RODS, 60 7/8" RODS 16'X 1-1/2" PUMP
SAN ANDRES PERFS: (IP: 116 BOPD + 50 MCFD + 116 BWPD) 4894 - 4974' (81 Holes)
SAN ANDRES PERFS: ORIG-9000 GAL 20% HCL ACID
4-1/2" CSG @ 4,991' CMT'd W/ 250 SX CMT; 7-7/8" HOLE DRILLED TO 4,992'; PBTD@ 4,975'

BHT = 110F