

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88201
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

RECEIVED
JAN 07 2011
HOBBSOCD

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-08716
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: COLEMAN
8. Well Number #001
9. OGRID Number 162683
10. Pool name or Wildcat EUMONT; YATES-SR.-ON.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other	2. Name of Operator CIMAREX ENERGY CO. OF COLORADO ATTN: ZENO FARRIS
3. Address of Operator 600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701	4. Well Location Unit Letter J : 2310 feet from the SOUTH line and 2310 feet from the EAST line Section 17 Township 21S Range 36E NMPM County IEA
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,641' - GL	
Pit or Below-grade Tank Application ☐ or Closure ☒ Pit type STEEL Depth to Groundwater Distance from nearest fresh water well * Distance from nearest surface water * Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material NONE WITHIN 1,000'.	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING CEMENT ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach well log or recompletion.

PROPOSED PROCEDURE TO PLUG AND ABANDONED WELL:

- 1) SET 7" CIBP @ 3,150'; PUMP A 25 SX. CMT. PLUG @ 3,150'-3,050'; CIRC. WELL W/ PXA MUD.
- 2) PERF. X ATTEMPT TO SQZ. A 55 SX. CMT. PLUG @ 3,015'-2,895' (9-5/8" CSG. SHOE); WOC X TAG CMT. PLUG.
- 3) PERF. X ATTEMPT TO SQZ. A 50 SX. CMT. PLUG @ 1,340'-1,230' (T/SALT X ANHY.); WOC X TAG CMT. PLUG.
- 4) PERF. X ATTEMPT TO SQZ. A 70 SX. CMT. PLUG @ 475'-375' (12-1/2" CSG. SHOE).
- 5) PERF. X CIRC. TO SURF. A 40 SX. CMT. PLUG @ 63'-3'.
- 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CASINGS X INSTALL DRY HOLE MARKER.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David A. Eyler TITLE AGENT DATE 01/04/11

Type or print name DAVID A. EYLER

E-mail address: deyler@milagro-res.com

Telephone No. (432) 687-3033

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 1-10-2011

Conditions of Approval, if any:



**Cimarex Energy Co. of Colorado
Coleman #1**

API 30-025-08716

2310 FSL x 2310 FEL (Unit J) Sec 17, T-21-S, R-36-E,

Lea County, NM

GL: 3641' KB: ?

12-1/2" 50#, csg @ 423'
Cmt w/250 sx, circ to surface

9-5/8" 36?#, csg @ 2955'
Cmt w/??? Sx TOC Unknown

TOC Unknown

Ran 4/1996

KB Correction

?

Quantity	Description	Length	Setting Depth
	KB		0.00
	2 3/8" J-55 TBG		0.00
NOTE: No Tubing data in the well file. Tubing may not be present!			

Squeeze holes: 3199 - 3200, Sqz 80 sacks (7/7/72)

Yates Perfs: 3227 - 47, 3549 - 59'

CIBP @ 3613' w/20' cement (7/7/72)

7" 24# @ 3616'
Cmt with 70 sxs. TOC UNKNOWN

6-1/4" OH from 3616 - 4011' sqzd w 50 sx (7/7/72)

TD: 4011'

J Piwetz 1/3/2011




Cimarex Energy Co. of Colorado
Coleman #1

API 30-025-08716
2310 FSL x 2310 FEL (Unit J) Sec 17, T-21-S, R-36-E,
Lea County, NM
GL: 3641' KB: ?

12-1/2" 50#, csg @ 423'
Cmt w/250 sx, circ to surface

9-5/8" 367#, csg @ 2955'
Cmt w/??? Sx TOC Unknown

TOC Unknown

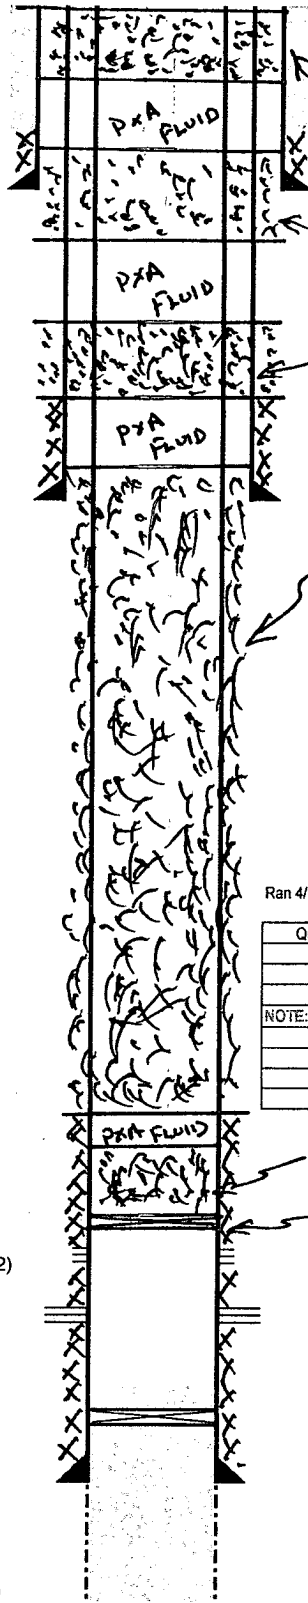

Ran 4/1996

KB Correction ?

Quantity	Description	Length	Setting Depth
KB			0.00
2 3/8" J-55 TBG			0.00
NOTE: No Tubing data in the well file. Tubing may not be present!			

Squeeze holes: 3199 - 3200, Sqz 80 sacks (7/7/72)

Yates Perfs: 3227 - 47, 3549 - 59'

CIBP @ 3613' w/20' cement (7/7/72)

7" 24# @ 3616'

Cmt with 70 sxs. TOC UNKNOWN

6-1/4" OH from 3616 - 4011' sqzd w 50 sx (7/7/72)

TD: 4011'

J Piwetz 1/3/2011