

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Minerals and Natural Resources
RECEIVED
FEB 09 2011
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
HOBBS NM 87505

Form C-103
May 27, 2004

WELL API NO. 30-025-36331 ✓	
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> ✓	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name: Bertie Whitmire ✓	
8. Well Number 11 ✓	
9. OGRID Number 16696 ✓	
10. Pool name or Wildcat Monument Tubb ✓	
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator OXY USA Inc.	
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	
4. Well Location Unit Letter <u>B</u> : <u>660</u> feet from the <u>north</u> line and <u>1650</u> feet from the <u>east</u> line Section <u>8</u> Township <u>20S</u> Range <u>37E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3549' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>	
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 2/4/11

Type or print name David Stewart

E-mail address:

david_stewart@oxy.com

Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 2-9-2011

Conditions of Approval, if any: THE OIL CONSERVATION DIVISION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS.

TD-7500' PBTD-7453' Perfs-6476-6484'

8-5/8" 32# csg @ 1195' w/ 780sx, 17-1/2" hole, TOC-Surf-Circ

7" 26# csg @ 4365' w/ 525sx, 7-7/8" hole, TOC-865'-Calc

4-1/2" 11.6# @ 7500' w/ 1000sx, 6-1/8" hole, TOC-*4672'-CBL

*2005/2009 Sqz csg leaks @ +/- 4132-4553' w/ total 500sx

1. RIH & set CIBP @ 6425' w/ 25sx cmt
2. M&P 25sx cmt @ 5585-5435'
3. M&P 25sx cmt @ 5170-5020'
4. M&P 50sx cmt @ 4600-4100' WOC-Tag
5. Perf 4-1/2" @ 3710' sqz 35sx cmt to 3610' WOC-Tag
6. Perf 4-1/2" @ 3150' sqz 35sx cmt to 3050' WOC-Tag
7. Perf 4-1/2" @ 2425' sqz 35sx cmt to 2325' WOC-Tag
8. Perf 4-1/2" @ 1245' sqz 35sx cmt to 1145' WOC-Tag
9. Perf 4-1/2" & 7" @ 300' sqz & circulate 120sx cmt to surface
10# MLF between plugs

OXY USA Inc. - Proposed
Bertie Whitmire #11
API No. 30-025-36331

120sx @ 300'-Surface ✓

35sx @ 1245-1145' WOC-Tag ✓

35sx @ 2425-2325' WOC-Tag ✓

35sx @ 3150-3050' WOC-Tag ✓

35sx @ 3710-3610' WOC-Tag ✓


50sx @ 4600-4100' WOC-Tag ✓

25sx @ 5170-5020' ✓

25sx @ 5585-5435' ✓

CIBP @ 6425' w/ 25sx ✓

PB-7453'

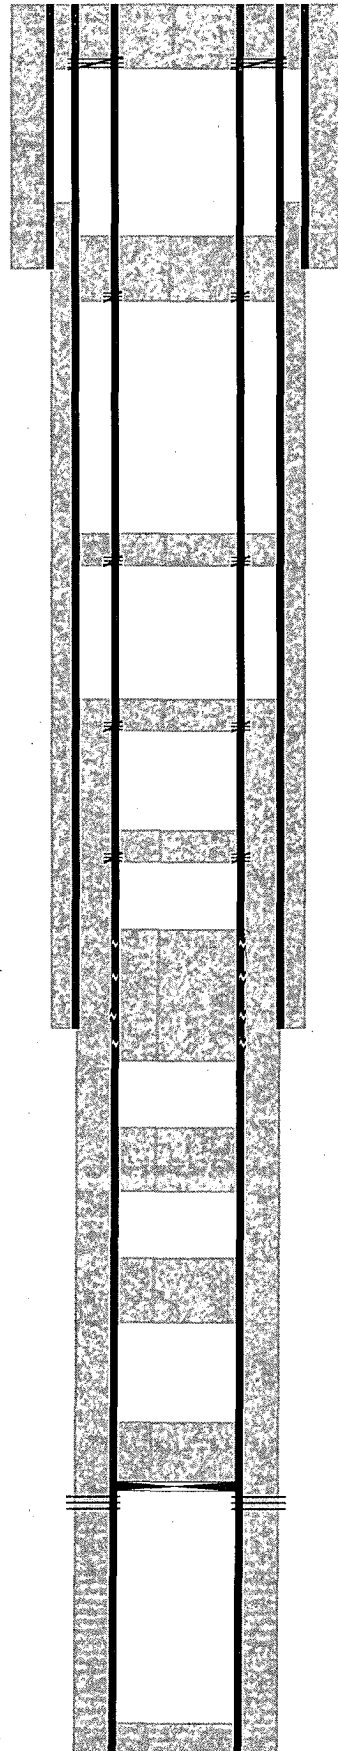

Perf @ 300'

17-1/2" hole @ 1195'
8-5/8" csg @ 1195'
w/ 780sx-TOC-Surf-Circ

Perf @ 1245'

Perf @ 2425'

Perf @ 3150'

Perf @ 3710'

7-7/8" hole @ 4365'
7" csg @ 4365'
w/ 525sx-TOC-865'-Calc


1/05-Sqz csg lk @ 4132-4553' w/ 225sx
9/09-Sqz csg lk @ 4346-4410' w/ 125sx
10/09-sqz csg lk @ 4474-4491' w/ 150sx

Perfs @ 6476-6484'

6-1/8" hole @ 7500'
4-1/2" csg @ 7500'
w/ 1000sx-TOC-4672'-CBL

TD-7500'

OXY USA Inc. - Current
Bertie Whitmire #11
API No. 30-025-36331

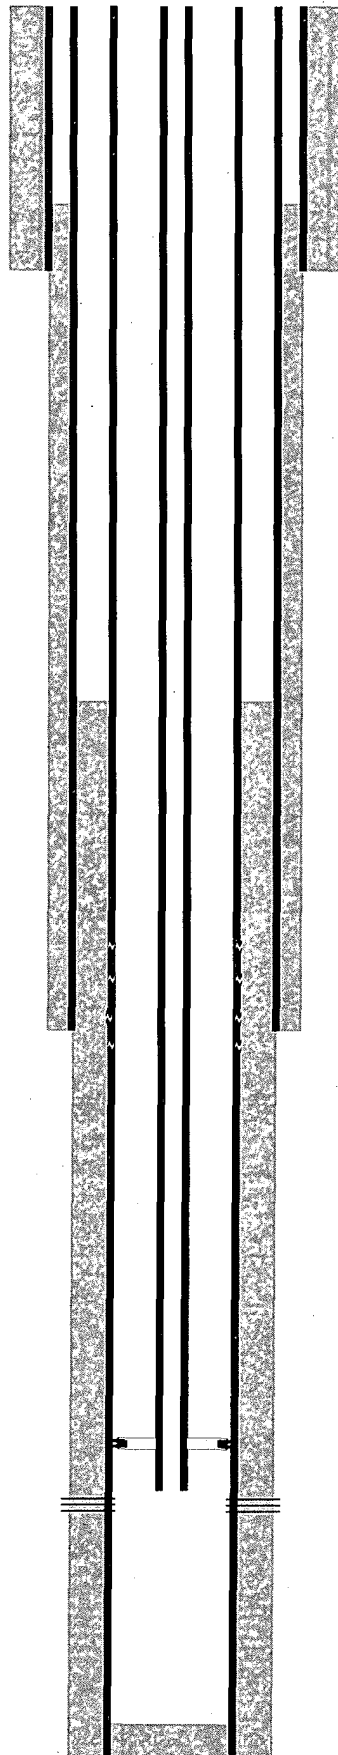

17-1/2" hole @ 1195'
8-5/8" csg @ 1195'
w/ 780sx-TOC-Surf-Circ

7-7/8" hole @ 4365'
7" csg @ 4365'
w/ 525sx-TOC-865'-Calc

1/05-Sqz csg lk @ 4132-4553' w/ 225sx
9/09-Sqz csg lk @ 4346-4410' w/ 125sx
10/09-sqz csg lk @ 4474-4491' w/ 150sx

2-3/8" tbg & TAC @ 6283'

Perfs @ 6476-6484'

6-1/8" hole @ 7500'
4-1/2" csg @ 7500'
w/ 1000sx-TOC-4672'-CBL

PB-7453'

TD-7500'