

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 19, 2008

RECEIVED

OIL CONSERVATION DIVISION
220 South St. Francis Dr.
Santa Fe, NM 87505

FEB 09 2011
HOBBSOCD

WELL API NO. 30-025-29285
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. 027818
7. Lease Name or Unit Agreement Name: State 'M' COM
8. Well Number 8
9. OGRID Number 162928
10. Pool name or Wildcat Saunders; Permo-Upper Penn
11. Elevation (Show whether DR, RKB, RT, GR, etc.) Gr: 4186'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	2. Name of Operator Energen Resources Corporation
3. Address of Operator 3300 N. 'A', Bldg. 4, Ste. 100, Midland, TX 79705	4. Well Location Unit Letter P : 660 feet from the South line and 660 feet from the East line Section 03 Township 15S Range 33E NMPM County Lea
11. Elevation (Show whether DR, RKB, RT, GR, etc.) Gr: 4186'	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Proposed plugging procedure attached.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tracie J Cherry TITLE Regulatory Analyst DATE 02-08-11

Type or print name Tracie J Cherry E-mail address: tracie.cherry@energen.com PHONE 432/684-3692

For State Use Only

APPROVED BY [Signature] TITLE Staff DATE 2-10-2011
Conditions of Approval (if any):

ENERGEN RESOURCES CORPORATION (162928)

State -M- Com #8

660' FSL and 660' FEL

30-025-29285

Sec 3, T-15-S, R-33-E

Lea, Co. NM

Saunders Permo Upper Penn Field

Plugging Procedure:

1. RIH, Tag CIBP @ 9925'
2. Check for 30' cement on top of plug.
3. Set CIBP @ 9800', dump 30' cement on top. *Fill hole w/ MLF* ~~Fill hole w/ MLF to 7,160'.~~
4. Spot cement plug @ 7,160'.
5. Tag cement plug. ~~Fill hole w/ MLF to 5,670'~~
6. Spot cement plug @ 5,670'.
7. Tag cement plug. ~~Fill hole w/ MLF to 4,100'~~
8. Perforate casing @ 4,400' with 4 squeeze holes.
9. Squeeze 60 sx cement through perms @ 4,400'.
10. ^A Tag cement plug. ~~Circulate MLF to 350'.~~
10. ^B *Perf @ 1585' SQ w/ 255xCent - Wax - Tag*
11. Perforate casing @ 400' with 4 squeeze holes.
12. Circulate cement to surface cement through perms.
13. Cut off wellhead 3' from surface and weld on P&A marker.

ENERGEN RESOURCES

State -M- Com Well #8
Saunders Permo Upper Penn
Lea County, New Mexico

660' FSL & 660' FEL
UL "P", Section 3, Township 15 South, Range 33 East

API: 3002529285
TAD Producer

P&A Proposed:

TD: 10,259'


Surface Casing:
13-3/8" 61#, H-40 ST&C @ 357'
Cmt w/400 Sx, Circulated

Intermediate Casing:
8-5/8" 24# & 32#, J-55 ST&C set @ 4300'
Cmt w/ 1600 sx, Circulated

Parted csg @ 5679'
sqz'd w/ 150 sxs class "C"
on 1/21/2000

Orig. TOC - 7150'

Production Liner:
5-1/2", 17#, N-80, L-80 & K-55 LT&C set
@ 10126', Cmt w/ 910 sx
TOC @ 7150' (Temp Survey)
PBD: 10,083'
TD: 10,259'

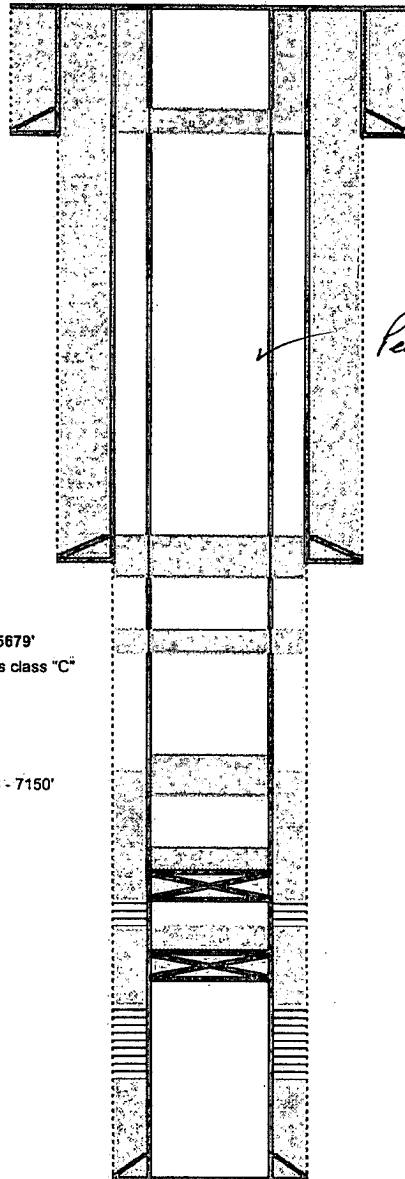

Perf and Circ. @ 400'

Perf @ 1585' sq w/ 25 sxs - 2000 TAY

Perf and Plug @ 4400'

Spot Plug @ 5670'

Spot Plug @ 7160'

Set CIPB @ 9800' and
Dump 30' cmt cap
Permo-Penn: Added 1/27/2000
9820'-75' (191 holes)
CIBP at 9925' w/ ? sx cmt
Permo-Penn:
9978'-96' (2 SPF)

ENERGEN RESOURCES

State -M- Com Well #8
Saunders Permo Upper Penn
Lea County, New Mexico

660' FSL & 660' FEL
UL "P", Section 3, Township 15 South, Range 33 East

API: 3002529285
TA'D Producer

Current Status: TA'D Producer
12/21/2010


TD: 10,259'

Surface Casing:
13-3/8" 61#, H-40 ST&C @ 357'
Cmt w/ 400 Sx, Circulated

Intermediate Casing:
8-5/8" 24# & 32#, J-55 ST&C set @ 4300'
Cmt w/ 1600 sx, Circulated

Orig. TOC - 7150'

Production Liner:
5-1/2" 17#, N-80, L-80 & K-55 LT&C set
@ 10126', Cmt w/ 910 sx
TOC @ 7150' (Temp Survey)
PBD: -10,083'
TD: 10,259'

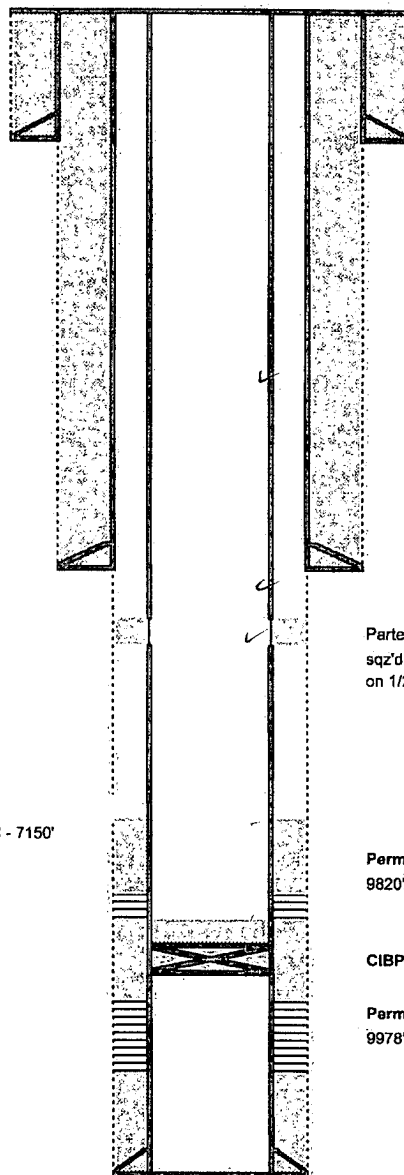

Parted csg @ 5679'
sqz'd w/ 150 sxs class "C"
on 1/21/2000

Permo-Penn:
9820'-75' (191 holes)

CIBP at 9925' w/ 7 sx cmt

Permo-Penn:
9978'-96' (2 SPF)