

HOBBS OCD

MAY 09 2011

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Road, Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural ResourcesForm C-101
June 16, 2008

RECEIVED

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit to appropriate District Office

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address Nadel and Gussman Permian, LLC 601 N. Maricopa Midland TX, 79701		² OGRID Number 155615
³ Property Code 38621	⁴ Property Name South Tobac State Unit	⁵ API Number 30-005-29179 Well No. 1-Y
⁹ Proposed Pool 1 Chavero: San Andres		¹⁰ Proposed Pool 2

⁷ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	29	8S	33E		850'	NORTH	830'	WEST	CHAVES

⁸ Proposed Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Additional Well Information

¹¹ Work Type Code N	¹² Well Type Code O	¹³ Cable/Rotary R	¹⁴ Lease Type Code S	¹⁵ Ground Level Elevation 4,394'
¹⁶ Multiple N	¹⁷ Proposed Depth 5,000'	¹⁸ Formation San Andres	¹⁹ Contractor N/A	²⁰ Spud Date 5/6/11

²¹ Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
17 1/2"	13 3/8"	48#	400'	400	Surface
12 1/4"	9 5/8"	36#	1850'	400	Surface
7 7/8"	5 1/2"	17#	5000'	800	Surface


²² Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

Mud Program:

0' to 300': 8.4 to 8.8 ppg, 80 - 55 visc w/ Fresh water spud mud
300' to 4700': 8.8 to 10.0 ppg, 28-30 visc, w/ brine / cut brine water

²³ I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

Signature:



Printed name: Jason Goss

Title: Drilling Engineer


E-mail Address: jgoss@naguss.com

Date: 5/6/11

Phone: 432 - 682 - 4429

OIL CONSERVATION DIVISION

Approved by:



Title:

Geologist

Approval Date:

05/06/11

Expiration Date:

05/06/13

Conditions of Approval Attached ☐

MAY 09 2011

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised July 16, 2010
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30 - 005 - 29179		² Pool Code 12049	³ Pool Name Chaveroo; San Andres
⁴ Property Code 38021	⁵ Property Name South Tobac State Unit		⁶ Well Number 1 - Y
⁷ OGRID No. 155615	⁸ Operator Name Nadel & Gussman Permian		⁹ Elevation 4392'

¹⁰ Surface Location

UL or lot no. D	Section 29	Township 8 S	Range 33 E	Lot Idn	Feet from the 850	North/South line NORTH	Feet from the 830	East/West line WEST	County CHAVES
---------------------------	----------------------	------------------------	----------------------	---------	-----------------------------	----------------------------------	-----------------------------	-------------------------------	-------------------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 40		¹³ Joint or Infill	¹⁴ Consolidation Code		¹⁵ Order No.				

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶ <p>SURFACE LOCATION *THIS WELL IS TO BE SURVEYED ONCE DRILLING OPERATIONS ARE COMPLETED.</p>	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature Date 5/6/11 Jason Goss Printed Name jgoss@naguss.com E-mail Address			
	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey Signature and Seal of Professional Surveyor:			
	Certificate Number			

Hydrogen Sulfide Drilling Operations Plan
South Tobac State Unit #1
SHL UNIT D, Sec 29, T8S, R33E
850' FNL & 830' FWL
Chaves Co, NM

1. Company and contract personnel admitted on location should be trained by a qualified H₂S safety instructor to recognize and handle the following:
 - A. Characteristics of H₂S gas
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems
 - D. Principle and operation of H₂S detectors, warning system and briefing knowledge
 - E. Evacuation procedure, routes and first aid support
 - F. Proper use of 30 minutes Pressure-on-Demand Air Pack
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of blooie line (mud pit) and on derrick floor or doghouse
3. Windsock and/or Wind Streamers
 - A. Windsock at mud pit area (high enough to be visible)
 - B. Windsock at briefing area (high enough to be visible)
 - C. Windsock at location entrance
4. Condition Flags and Signs
 - A. H₂S warning signs on lease access road into location
 - B. Flags displayed on sign at location entrance
 1. Green flag indicates "Normal Safe Conditions"
 2. Yellow Flag indicates "Potential Pressure and Danger"
 3. Red Flag indicates "Danger - H₂S Present in High Concentrations" *admit only emergency personnel*
5. Well Control Equipment
 - A. See BOP schematic page
6. Communication
 - A. While working under masks chalkboards will be used for communication
 - B. Hand signals will be used where chalk board is inappropriate
 - C. Two -way radios or cell phones used to communicate off location or minimally in Drilling Foreman's trailer or living quarters
7. Drillstem Testing
 - A. Exhausts watered
 - B. Flare line equipped with electric igniter/propane pilot light in case gas reaches surface
 - C. If location near dwelling closed DST will be performed
8. Drilling Supervisor required to be familiar with effects of H₂S on tubular goods/mechanical equipment
9. If H₂S encountered, mud system shall be addressed to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers, if necessary.

PUBLIC PROTECTION PLAN FOR EMERGENCY CONTACTS

NADEL AND GUSSMAN PERMIAN, LLC (432) 682-4429

Company Personnel

Joel Martin	Drilling Engineer	432-682-4429 432-238-9969
Chris Marquez	Drilling Engineer	432-682-4429 432-202-0942
Keith Cannon	Drilling Supt.	575-623-6601 575-626-1936
Jason Goss	Drilling Engineer	512-784-2613
Kurt Hood	Drilling & Workover	575-513-1499

ARTESIA N.M.

Ambulance	911
State Police	575-746-5000
City Police	575-746-5000
Sheriff's Office	575-746-9888
Fire Department	575-746-5050 or 575-746-5051
N.M.O.C.D	575-748-1283

CARLSBAD N.M.

Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-885-3125 or 575-885-2111
Carlsbad BLM	575-887-6544


HOBBS N.M.

Ambulance	911
State Police	575-392-5588
City Police	575-397-9265
Sheriff's Office	575-396-3611
Fire Department	575-397-9308
N.M.O.C.D	575-393-6161
Hobbs BLM	575-393-3612

Flight for Life (Lubbock Tx)	806-743-9911
Aerocare (Lubbock Tx)	806-747-8923
Med flight air Ambulance (Albuq NM)	505-842-4433
SB air Med Services (Albuq NM)	505-842-4949



Boots & Coots IWC	800-256-9688 or 281-931-8884
Cudd Pressure Control	915-699-0139 or 915-563-3356
BJ Services (Artesia NM)	575-746-3569
(Hobbs NM)	575-392-5556

New Mexico Emergency Response Commission (Santa Fe)	505-476-9600
24 Hour	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

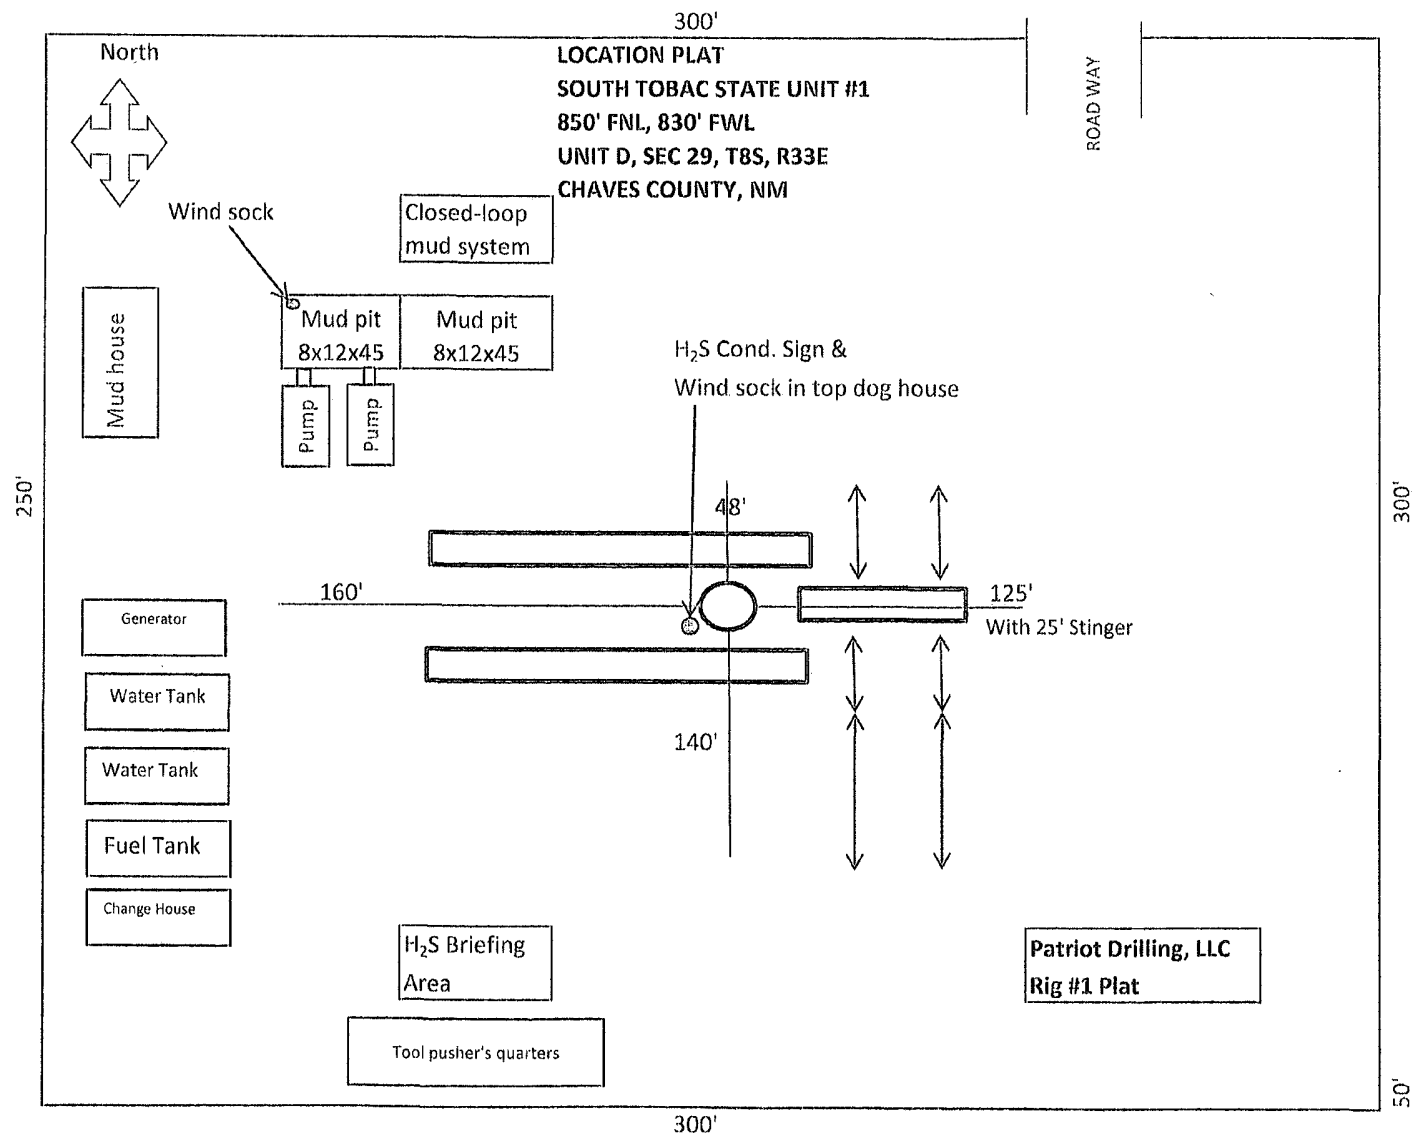

Nadel and Gussman Permian, LLC

MINIMUM BLOWOUT PREVENTER REQUIREMENTS

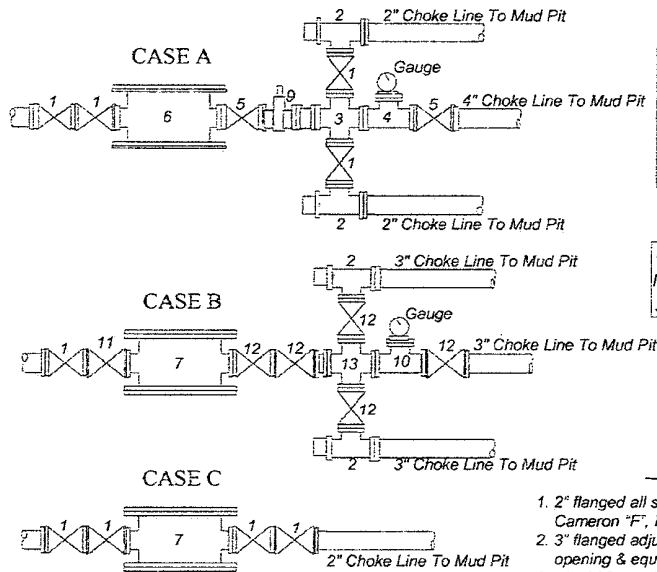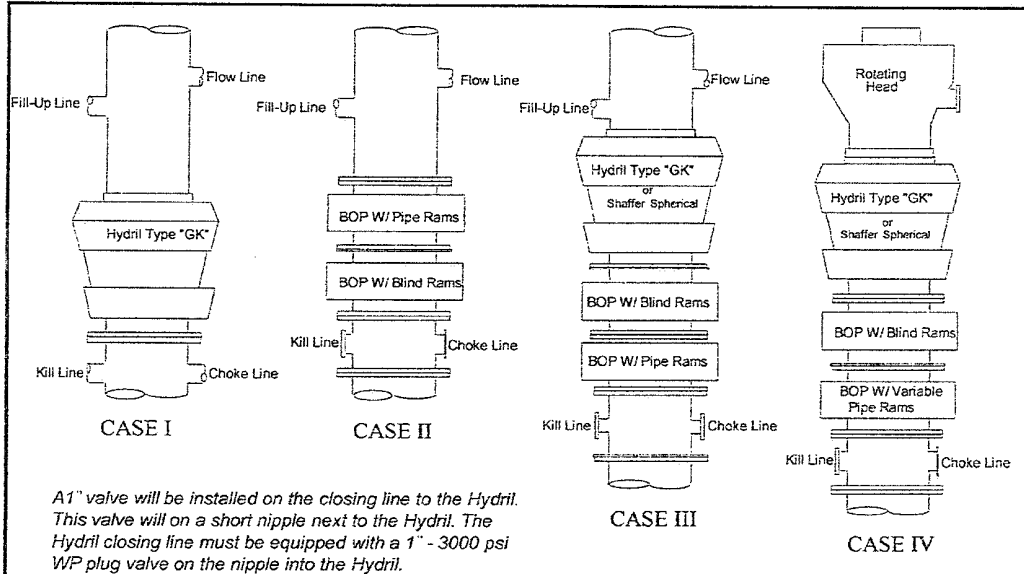

BOP SIZE	BOP CASE	WORKING PRESSURE	CHOKE CASE
17 1/2"	IV	3000 psi	B
12 1/4"	IV	3000 psi	B

***Rotating head required**

Bradenhead : _____
 Mfr: _____
 Size: _____ Type: _____

Legend

1. 2" flanged all steel valve must be either Cameron "F", Halliburton Low Torque or Shaffer Flo-Seal.
2. 3" flanged adjustable chokes, min. 1" full opening & equipped with hard trim.
3. 4" x 2" flanged steel cross.
4. 4" flanged steel tee.
5. 4" flanged all steel valve (Type as in no. 1).
6. Drilling Spool with 2" x 4" flanged outlet.
7. Drilling Spool with 2" Flanged Kill inlet, & 3" flanged choke outlet.
8. 2" x 2" flanged steel cross.
9. 4" pressure operated gate valve.
10. 3" flanged steel tee.
11. 2" Flanged check valve
12. 3" flanged all steel valve must be either Cameron "F", Halliburton Low Torque or Shaffer Flo-Seal.
13. 3" x 3" flanged steel cross.

Notes

Choke manifold may be located in any convenient position. Use all steel fittings throughout. Make 90° turns with bull plugged tees only. No field welding will be permitted on any of the components of the choke manifold and related equipment upstream of the chokes. The choke spool and all lines and fittings must be at least equivalent to the test pressure of the preventers required. Independent closing control unit with clearly marked controls to be located on derrick floor near driller's position.