

Submit 1 Copy To Appropriate District Office
 District I
 1625 N. French Dr., Hobbs, NM 88240
 District II
 1301 W. Grand Ave., Artesia, NM 88210
 District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 October 13, 2009

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-005-20527 ✓
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> ✓
2. Name of Operator Cambrian Management, Ltd ✓		6. State Oil & Gas Lease No. NM 0174830
3. Address of Operator PO Box 272, Midland, TX 79702		7. Lease Name or Unit Agreement Name Davis N ✓
4. Well Location Unit Letter <u>C</u> : <u>660</u> feet from the <u>North</u> line and <u>1980</u> feet from the <u>West</u> line Section <u>18</u> Township <u>O 8 S</u> Range <u>22 E 33 E</u> NMPM Chaves County		8. Well Number <u>3</u> ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4430' GL		9. OGRID Number 198688 ✓
		10. Pool name or Wildcat Chaveroo San Andres ✓

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING MULTIPLE COMPL
 DOWNHOLE COMMINGLE

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ALTERING CASING
 COMMENCE DRILLING OPNS. P AND A
 CASING/CEMENT JOB

OTHER:

OTHER:


13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- Test all anchors
- Set 4 1/2" CIBP @ 4200'. Circ hole w/9.5 ppg mud-laden fluid from depth of 4200'.
- Spot plug # 1 (20 sx Class "C" cmt) 4000'-4200'. WOC & Tag.
- Spot plug # 2 (20 sx Class "C" cmt) 3300'-3500'. WOC & Tag.
- Spot plug # 3 (30 sx Class "C" cmt) 2575'-2852'. WOC & Tag.
- ~~Spot plug # 4 (30 sx Class "C" cmt) 2042'-2342'. WOC & Tag.~~ → Perf # 5 @ 305x @ 2042' WOC - TAG
 → Perf # 4 @ 305x @ 1600' WOC - TAG
- Perf 4 1/2" @ 450'. Circ 4 1/2" ID from surface thru perms @ 450' and back to surface on 8 5/8" x 4 1/2" annulus w/plug # 5. (200 sx Class "C" cmt) 3'-450'.
- Cut off csg 3' below GL. Erect marker and perform reclamation work.

We would like to begin work no later than April 25th 2011. Well bore schematic attached.

Spud Date: _____

The Oil Conservation Division Must be notified
 24 hours prior to the beginning of plugging operations.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Denise Jones TITLE Regulatory Analyst DATE 4-4-11


Type or print name Denise Jones E-mail address: djones@CambrianMgmt.com PHONE: 432-620-9181
For State Use Only

APPROVED BY: [Signature] TITLE Staff Mgr DATE 5-11-2011
 Conditions of Approval (if any): _____

Davis N # 3

Cambrian#: 710003

API # 3000520527

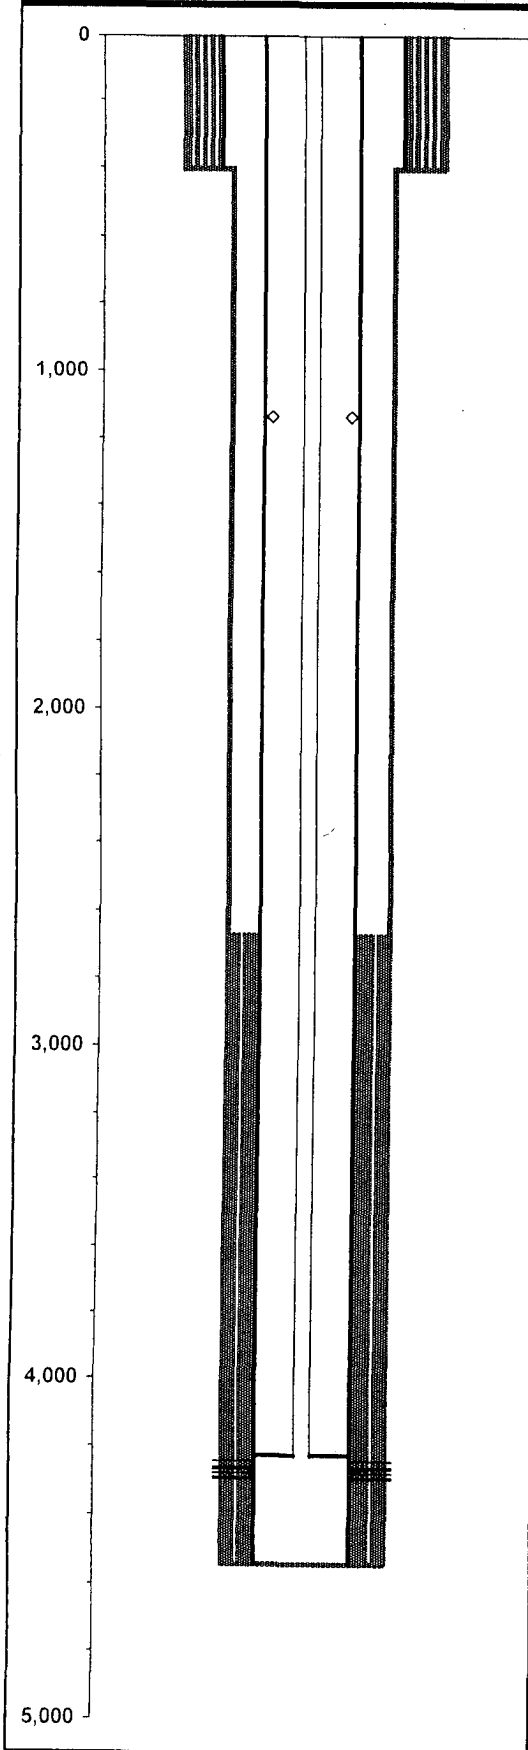

660' FNL & 1980' FWL	GL Elev: 4,430.00
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 18, T-8S R-33E,	Fill Depth: 4,503.00
County, State: Chaves, NM	PBTD: 4,540.00
Aux ID:	TD: 4,540.00
KB = ; DF = ; All Depths Corr To:	BOP:

Hole Size

Diameter	Top At	Btm At	Date Drilled
12.2500	0.00	400.00	
7.6250	400.00	4,540.00	

Surface Casing

Date Ran: 12/23/1975

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		8.6250	28.55	X42	400.00	0.00	400.00

Production Casing String 1

Date Ran: 12/23/1975

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		4.5000	11.60	K55	4,540.00	0.00	4,540.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
400	C		8.625	12.250	0.00	400.00	Circ
300	TRWL		4.500	7.625	2,675.00	4,540.00	TS
300	H		4.500	7.625	2,675.00	4,540.00	TS

Zone and Perfs

San Andres

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
4,240.00	4,256.00		A			1	
4,262.00	4,266.00		A			1	
4,274.00	4,284.00		A			1	
4,289.00	4,294.00		A			1	

Tubing String 1

Date Ran: 10/1/2009

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Tbg Sect 1	133	2.3750	4.70	J55	4,188.60	0.00	4,188.60
Blast Jt	1	2.3750	4.70	J55	31.45	4,188.60	4,220.05
Stg Nipple	1	2.3750			1.10	4,220.05	4,221.15
Packer	1	4.5000			2.80	4,221.15	4,223.95
Prf Nipple	1	2.3750	4.70	J55	4.00	4,223.95	4,227.95

Rod String 1

Date Ran: 10/1/2009

Description	#	Diameter	Rod Box	Grade	Length	Top At	Btm At
Pol/Rd	1	1.2500	SH SM		22.00	0.00	22.00
Rod Sect 1	1	0.8750	SH SM	KD	4.00	22.00	26.00
Rod Sect 2	50	0.8750	SH SM	KD	1,250.00	26.00	1,276.00
Rod Sect 3	114	0.7500	Full SM	KD	2,850.00	1,276.00	4,126.00
Rod Sect 4	3	1.2500	Full SM	KD	75.00	4,126.00	4,201.00
Stabilizer	1	0.7500	Full SM	KD	4.00	4,201.00	4,205.00
Pump	1	1.2500	Full SM		16.00	4,205.00	4,221.00
Strainer	1	1.0000			1.00	4,221.00	4,222.00


Wellbore Schematic (From Surface to TD)

Printed: 5/11/2011

Davis N # 3

: 710003

API # 3000520527

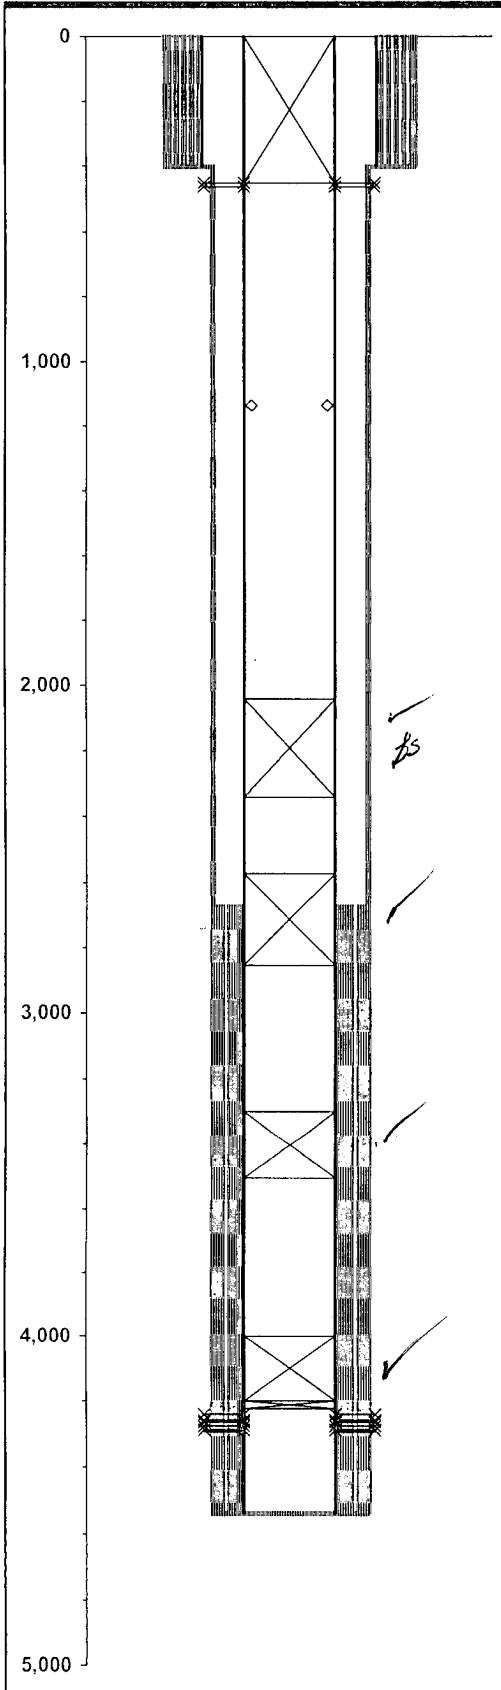

660' FNL & 1980' FWL	GL Elev:	4,430.00
Sec, Blk, Sur(Lbr, Lge, Sur) or (Sec, Twn, Rng): 18, T-8S R-33E,	Fill Depth:	
County, State: Chaves, NM	PBTD:	4,503.00
Aux ID:	TD:	4,540.00
KB = ; DF = ; All Depths Corr To:	BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
12.2500	0.00	400.00	
7.6250	400.00	4,540.00	

Surface Casing

Date Ran: 12/23/1975

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		8.6250	28.55	X42	400.00	0.00	400.00

Production Casing String 1

Date Ran: 12/23/1975

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing		4.5000	11.60	K55	4,540.00	0.00	4,540.00

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
400	C		8.625	12.250	0.00	400.00	Circ
300	TRWL		4.500	7.625	2,675.00	4,540.00	TS
300	H		4.500	7.625	2,675.00	4,540.00	TS

Zone and Perfs

San Andres

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
450.00	460.00		PA				
4,240.00	4,256.00		PA			1	
4,262.00	4,266.00		PA			1	
4,274.00	4,284.00		PA			1	
4,289.00	4,294.00		A			1	

Wellbore Plugs and Junk

Top	Bottom	Type	Diameter	Solid	Date
0.00	450.00	Cmt	4.500	Yes	4/30/2011
2,042.00	2,342.00	Cmt	4.500	Yes	4/30/2011
2,575.00	2,852.00	Cmt	4.500	Yes	4/30/2011
3,300.00	3,500.00	Cmt	4.500	Yes	4/30/2011
4,000.00	4,200.00	Cmt	4.500	Yes	4/30/2011
4,200.00	4,220.00	CIBP	4.500	Yes	4/30/2011