

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

HOBBS OCD
MAY 12 2011
RECEIVED

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-12340
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B-1732
7. Lease Name or Unit Agreement Name: West Dollarhide Devonian Unit
8. Well Number 105
9. OGRID Number 16696
10. Pool name or Wildcat Dollarhide Devonian

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other Injection <input checked="" type="checkbox"/>	2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	4. Well Location Unit Letter <u>L</u> : <u>1650</u> feet from the <u>south</u> line and <u>330</u> feet from the <u>west</u> line Section <u>33</u> Township <u>24S</u> Range <u>38E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3177' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 5/12/11
E-mail address: david_stewart@oxy.com
Telephone No. 432-685-5717

Type or print name David Stewart

For State Use Only

APPROVED BY [Signature] TITLE STAFF MGR DATE 5-12-2011
Conditions of Approval, if any.

TD-8780' PBTD-2850' Perfs-7704-7890' RBP-2850'-3707'-7590'

13" 50# csg @ 282' w/ 325sx, 17-1/4" hole, TOC-Surf-Circ


8-5/8" 28# csg @ 2900', w/ 1450sx, 11" hole, TOC-1335'-TS

5-1/2" 14-15.5-17# csg @ 8779' w/ 500sx, 7-7/8" hole, *TOC-5358'-TS

*2/76-Perf @ 5250-5251' sqz 1000sx-TOC-Surf-Circ

1. RIH & drill & clean out to 7590' M&P 25sx cmt to 7440'
 2. M&P 25sx cmt @ 6175-6025'
 3. M&P 25sx cmt @ 5300-5150' WOC-Tag
 4. M&P 25sx cmt @ 3710-3560' WOC-Tag
 5. M&P 60sx cmt @ 2950-2650' WOC-Tag
 6. M&P 25sx cmt @ 1790-1550' WOC-Tag
 7. Perf 5-1/2" & 8-5/8" @ 1215' sqz 65sx cmt to 1115' WOC-Tag
 8. Perf 5-1/2" & 8-5/8" @ 332' sqz 200sx cmt to surface
- 10# MLF between plugs

OXY USA Inc. - Current
West Dollarhide Devonian Unit #105
API No. 30-025-12340

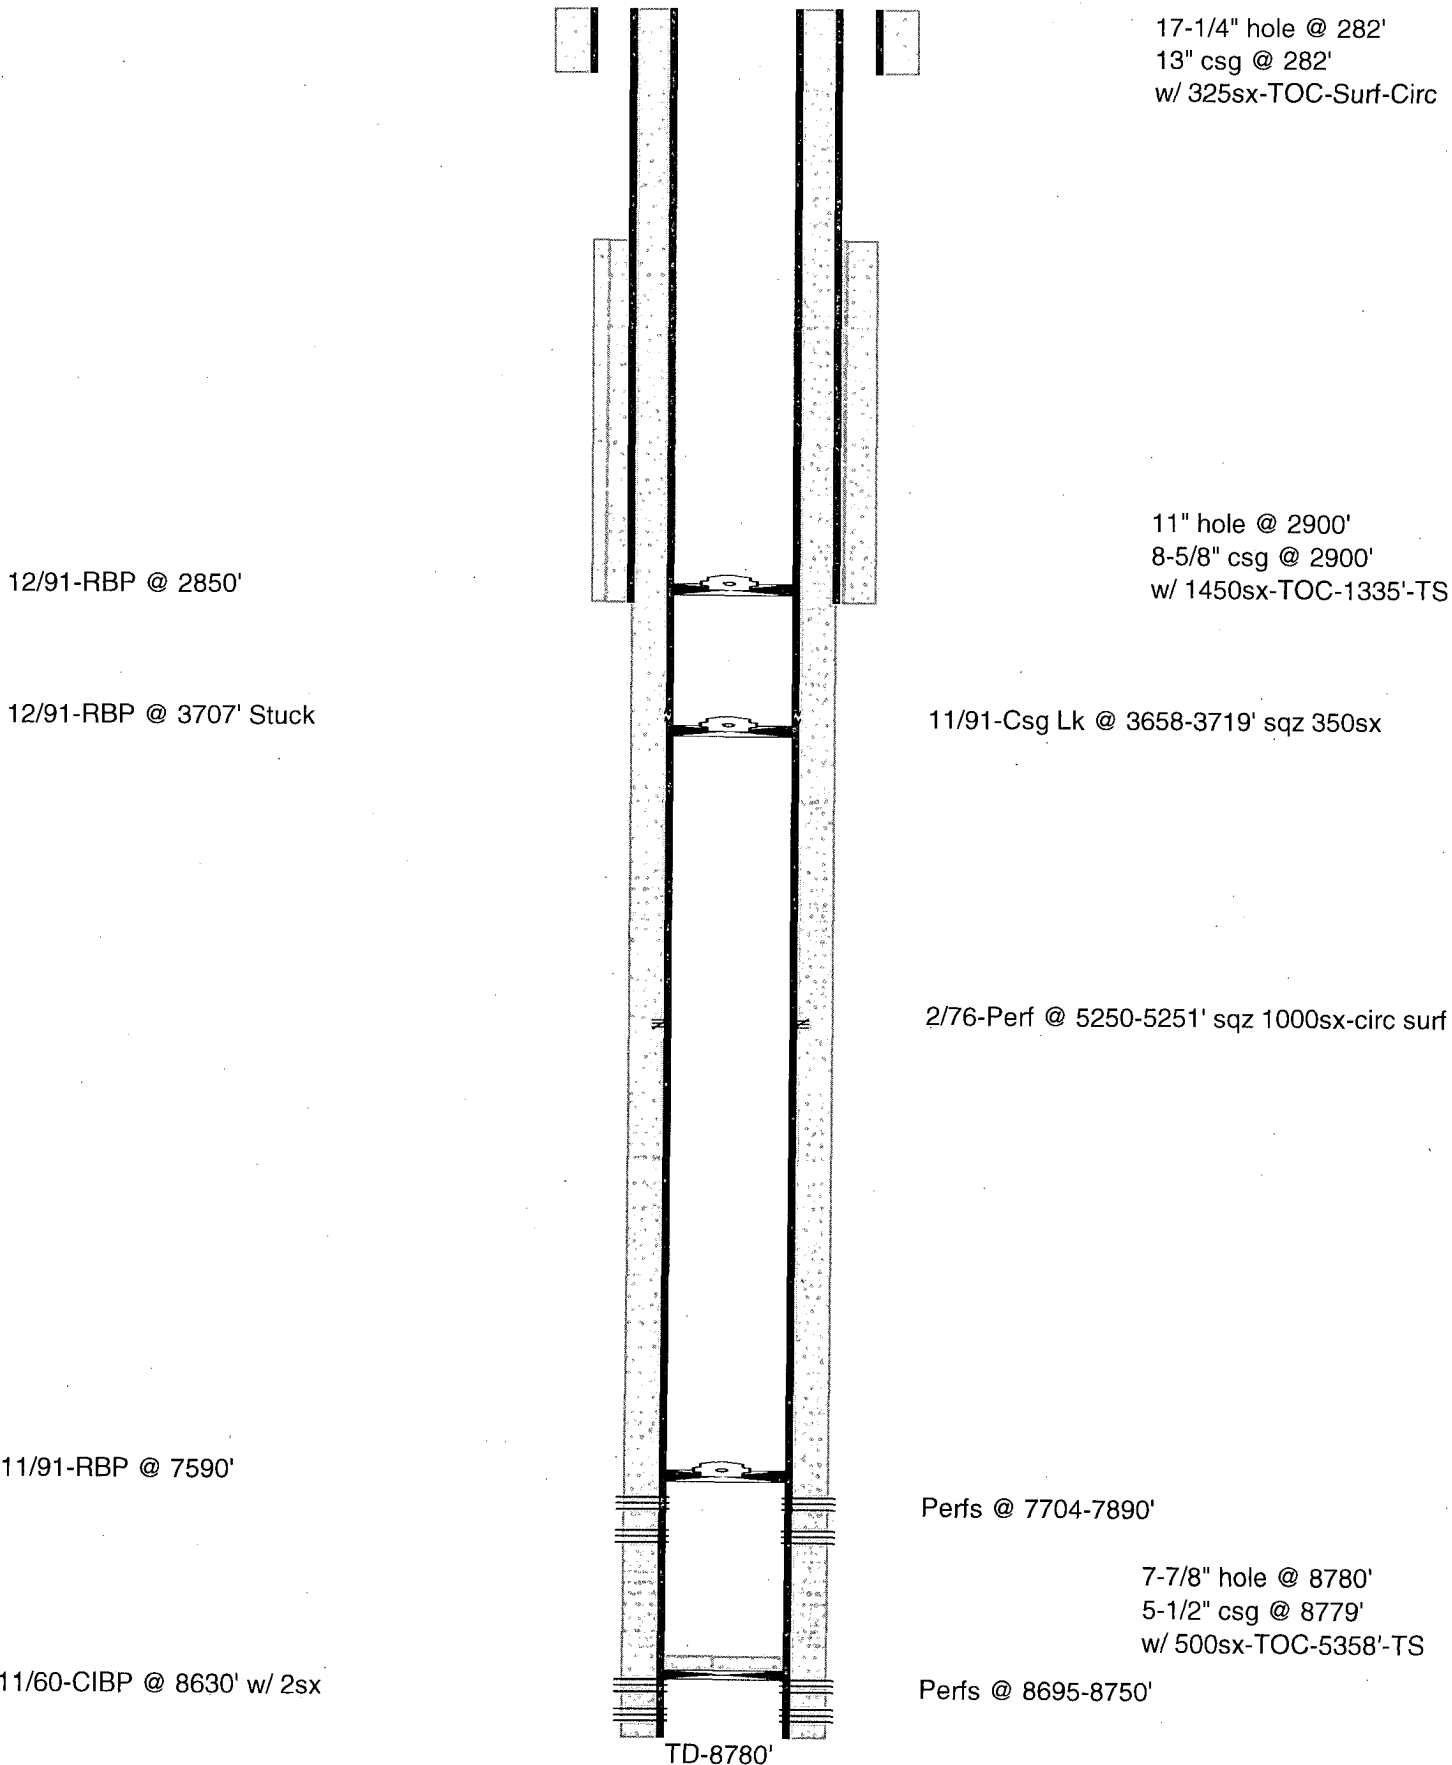

OXY USA Inc. - Proposed
West Dollarhide Devonian Unit #105
API No. 30-025-12340

200sx @ 332'-Surface

65sx @ 1215-1115' WOC-Tag

25sx @ 1790-1550' WOC-Tag

60sx @ 2950-2650' WOC-Tag

25sx @ 3710-3560' WOC-Tag

25sx @ 5300-5150' WOC-Tag

25sx @ 6175-6025'

25sx @ 7590-7440'
11/91-RBP @ 7590'

11/60-CIBP @ 8630' w/ 2sx

