

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OGD

State of New Mexico
Oil, Minerals and Natural Resources

Form C-103
May 27, 2004

MAY 27 2011

CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

WELL API NO. 30-025-11394
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Hodges B
8. Well Number 2
9. OGRID Number 16696
10. Pool name or Wildcat Justis Fusselman, North

Pit or Below-grade Tank Application ☐ or Closure ☐
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>
2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250
4. Well Location Unit Letter <u>L</u> : <u>1980</u> feet from the <u>south</u> line and <u>330</u> feet from the <u>west</u> line Section <u>1</u> Township <u>25S</u> Range <u>37E</u> NMPM County <u>Lea</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3135' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 5/26/11
E-mail address: david_stewart@oxy.com
Type or print name David Stewart Telephone No. 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE State Engineer DATE 5-31-2011
Conditions of Approval, if any:

TD-8457' PBTB-7850' Perfs-6955-7131'


13-3/8" 48# @ 505' w/ 500sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 36-40# @ 3400' w/ 2650sx, 12-1/4" hole, TOC-Surf-Circ

7" 23-26# @ 8442' w/ 600sx, DVT @ 6508', 8-3/4" hole, TOC-4512'-Calc

1. RIH & set CIBP @ 6905' M&P 25sx cmt
 2. M&P 25sx cmt @ 6558-6458' WOC-Tag
 3. M&P 25sx cmt @ 5670-5570' ~~WOC-Tag~~
 4. M&P 25sx cmt @ 5085-4985' ~~WOC-Tag~~
 5. Perf @ 4665' sqz 45sx cmt to 4365' WOC-Tag
 6. Perf @ 3450' sqz 45sx cmt to 3350' WOC-Tag
 7. Perf @ 3045' sqz 45sx cmt to 2945' WOC-Tag
 8. Perf @ 2415' sqz 45sx cmt to 2315' WOC-Tag
 9. Perf @ 555' sqz 230sx cmt to Surface
- 10# MLF between plugs

OXY USA Inc - Current
Hodges B #2
API No. 30-025-11394

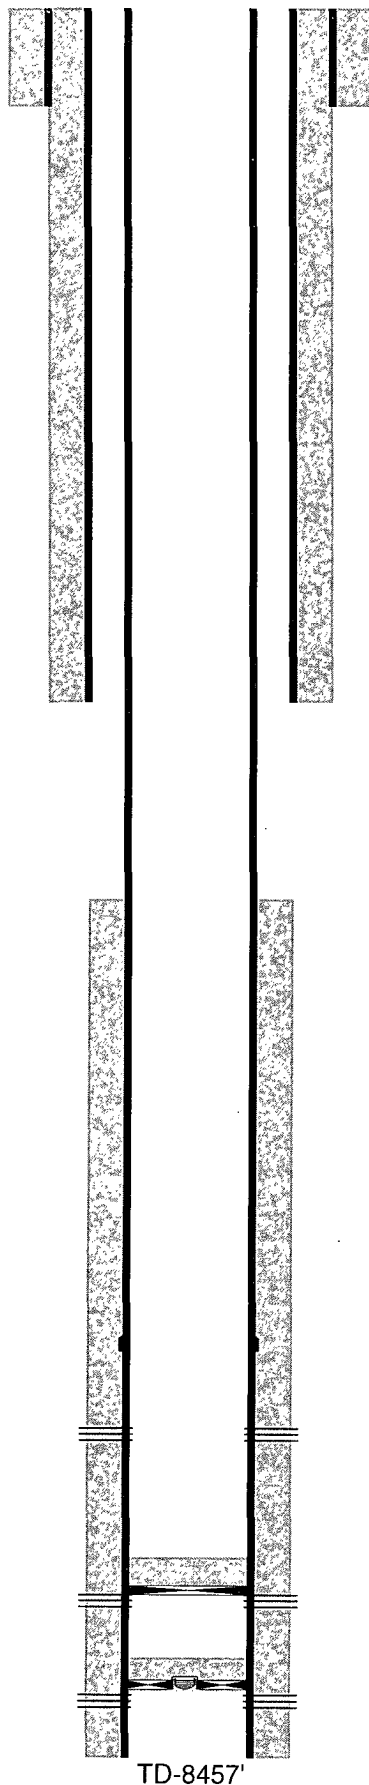

17-1/2" hole @ 505'
13-3/8" csg @ 505'
w/ 500sx-TOC-Surf-Circ

12-1/4" hole @ 3400'
9-5/8" csg @ 3400'
w/ 2650sx-TOC-Surf-Circ

8-3/4" hole @ 8457'
7" csg @ 8442'
DVT @ 6508'
1st w/ 300sx-TOC-6503'-Calc
2nd w/ 300sx-TOC-4512'-Calc

Perfs @ 6955-7131'

Perfs @ 7993-8090'

Perfs @ 8400-8430'

1978-CIBP @ 7900' w/ 10sx

1978-Pkr @ 8350' w/ plug & 10sx

TD-8457'

OXY USA Inc - Proposed
Hodges B #2
API No. 30-025-11394

230sx @ 555'-Surface

45sx @ 2415-2315' WOC-Tag

45sx @ 3045-2945' WOC-Tag

45sx @ 3450-3350' WOC-Tag

45sx @ 4665-4365' WOC-Tag

25sx @ 5085-4985' ~~WOC-Tag~~


25sx @ 5670-5570' ~~WOC-Tag~~

25sx @ 6558-6458'

CIBP @ 6905' w/ 25sx cmt

1978-CIBP @ 7900' w/ 10sx

1978-Pkr @ 8350' w/ plug & 10sx

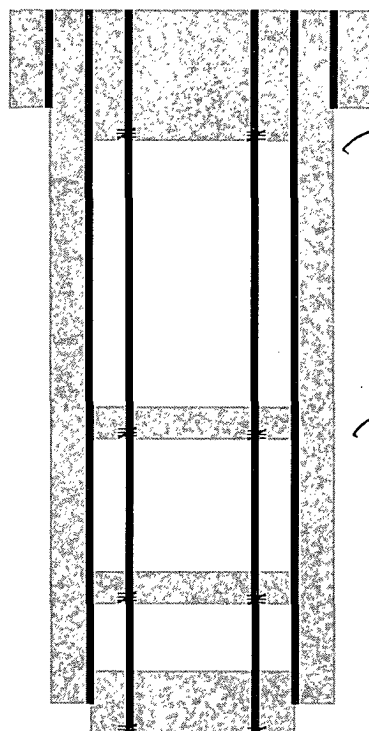

Perf @ 555'

Perf @ 2415'

Perf @ 3045'

Perf @ 3450'

Perf @ 4665'

Perfs @ 6955-7131'

Perfs @ 7993-8090'

Perfs @ 8400-8430'

17-1/2" hole @ 505'
13-3/8" csg @ 505'
w/ 500sx-TOC-Surf-Circ

12-1/4" hole @ 3400'
9-5/8" csg @ 3400'
w/ 2650sx-TOC-Surf-Circ

8-3/4" hole @ 8457'
7" csg @ 8442'
DVT @ 6508'
1st w/ 300sx-TOC-6503'-Calc
2nd w/ 300sx-TOC-4512'-Calc

TD-8457'