


N

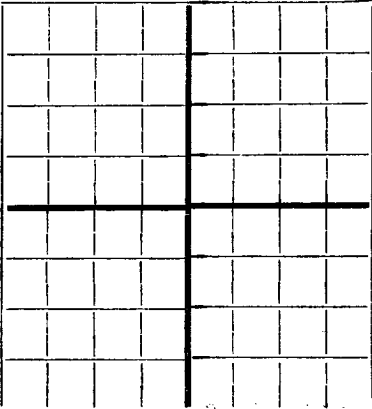

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Humble Oil & Refining Company, P. O. Box 1600, Midland, Texas
Company or Operator Address
R. W. Northcutt Well No. 1 in W/2 of Sec. 32, T. 8 N.
Lease
R. 37 E., N. M. P. M., Bellview Field, Curry County.
Well is 660 feet North of the line and 1980 feet East of the line of SW 1/4 Sec. 32
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is R. W. Northcutt, Address Clovis, New Mexico
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced August 23, 1946. Drilling was completed October 22, 1946
Name of drilling contractor Norwood Drilling Co., Address Waggoner Bldg., Wichita Falls, Texas
Elevation above sea level at top of casing 4477 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

(NONE - Dry Hole)

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8				82.76					
9-5/8				27.28			2-1/2"	holes @ 1255'	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	13-3/8	98.26	100	Halliburton		
	9-5/8	27.43	1000	Halliburton		
After temperature survey 9-5/8" casing perforated at 1255' and cemented with 800 sacks in order to bring cement to surface.						

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NONE				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry hole, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

R. L. Griffin, Driller E. O. Baird, Driller
W. W. Pyrer, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this Midland, Texas
day of, 19 Name
Position
Notary Public Representing
My Commission expires Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	142	142	Sand rock and red bed.
142	1010	868	Blue shale and red bed.
1010	1137	127	Red bed and shale
1137	1431	294	Anhydrite and red bed
1431	1712	281	Anhydrite and gyp
1712	2658	946	Lime
2658	2745	87	Lime
2745	3352	607	Dolomite and anhydrite
3352	3538	186	Dolomite
3538	4050	512	Red bed and stks. shale
4050	4538	488	Anhydrite and red bed
4538	4894	356	Anhydrite and broken red bed
4894	5228	334	Anhydrite, stks. of red bed and shale
5228	5570	342	Anhydrite and broken shale
5570	5729	159	Red bed, anhydrite and shale.
5729	5846	27	Shale, red bed, and anhydrite
5846	5987	141	Shale and red bed
5987	6115	128	Red bed and shale
6115	6234	119	Lime and shale
6234	6230		Lime
6230	6231		
6231	6234.5	3.5	Hard gray lime. Depth corrected.
6234.5	6315	80.5	Lime
6315	6384	69	Lime
6384	6431	47	Lime
6431	6549	118	Lime
6549	6631	82	Lime
6631	6672	41	Dark gray shale
6672	6743	71	Shale and lime
6743	6761	18	Broken gray lime and granite wash
6761	6808	47	Lime
6808	6928	120	Lime and broken shale
6928	6961	33	Lime and shale
6961	7015	54	Lime and broken shale
7015	7028	13	Lime and shale
7028	7094	66	Granite wash
7094	7128	34	Lime and shale
7128	7192	64	Crystal dolomite
7192	7222	30	Lime and shale
7222	7260	38	Lime and shale
7260	7335	75	Lime and shale
7335	7358	23	Granite wash
7358	7378	20	Lime and shale
7378	7492	114	Gray lime and shale
7492	7520	28	Granite wash
7520	7511		Total depth corrected. Granite wash.