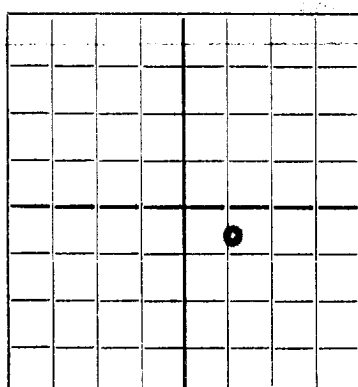


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Viersen & Brown

Robinson

Company or Operator

Well No. 1 in 6 NW SE of Sec. 14, T. 11 S

R. 32 E, N. M. P. M., Wildcat Field, Lea County.

Well is 3300 feet south of the North line and 1980 feet west of the East line of Sec. 14

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Zeke Robinson, Address Caprock, N.M.

If Government land the permittee is, Address

The Lessee is R. W. Viersen, Address Okmulgee, Okla.

Drilling commenced October 9, 1935, Drilling was completed February 28, 1936

Name of drilling contractor I.L. Dillard (C&G Oil Co), Address Continental Bldg. Dallas, Texas.

Elevation above sea level at top of casing 4355 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2"	40 1/2	8-11	Nat'l	150'				
9-5/8"	36 1/2	seamless	"	2250'				
7 OD	32 1/2	"	Ygsta	3950'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	15 1/2"	150'	80	Halliburton		
10"	9-5/8"	2250'	100	"		
8"	7 OD	3950	100	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5026 feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing, 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment, Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Link, Driller Wilson, Driller

Hendricks, Driller, Driller

FORMATION RECORD ON OTHER SIDE Attached

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Midland, Texas November 6, 1936

day of November, 1936

Name J W Brown

Position Superintendent

Representing Viersen & Brown

Notary Public

My Commission expires April 28-1940

Company or Operator

Address c/o Nickson Hotel, Roswell, N.M.

FORMATION RECORD

[illegible]